




# OIL ANALYSIS REPORT

Sample Rating Trend

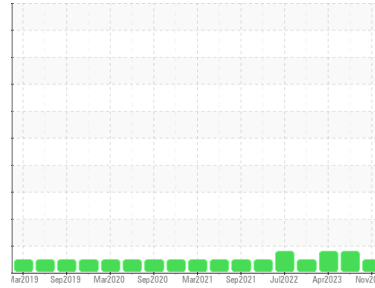

**NORMAL**



Area  
**INTERSTATIAL - FAT TRIM DUMPER**

Machine Id  
**B58945 - POWER UNIT LEAN/FAT LINE 3**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0872407</b>	WC0838758	WC0775004
Sample Date	Client Info	<b>13 Nov 2023</b>	03 Aug 2023	25 Apr 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ATTENTION	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>2</b>	5	4
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	2	<1
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>0</b>	1	0
Calcium	ppm	ASTM D5185m 50	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m 330	<b>332</b>	389	392
Zinc	ppm	ASTM D5185m 430	<b>14</b>	14	3
Sulfur	ppm	ASTM D5185m 760	<b>420</b>	586	150

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>0</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>2844</b>	▲ 6987	▲ 11297
Particles >6µm	ASTM D7647 >1300	<b>207</b>	314	747
Particles >14µm	ASTM D7647 >160	<b>12</b>	8	7
Particles >21µm	ASTM D7647 >40	<b>3</b>	2	1
Particles >38µm	ASTM D7647 >10	<b>0</b>	0	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>19/15/11</b>	▲ 20/15/10	▲ 21/17/10

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.70	<b>0.15</b>	0.22	0.22




# OIL ANALYSIS REPORT

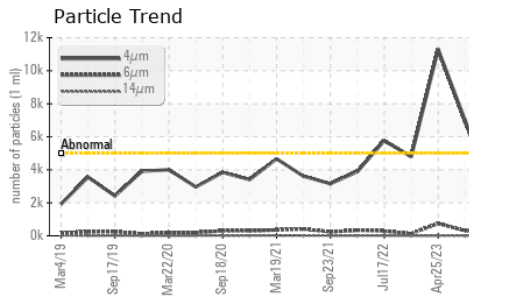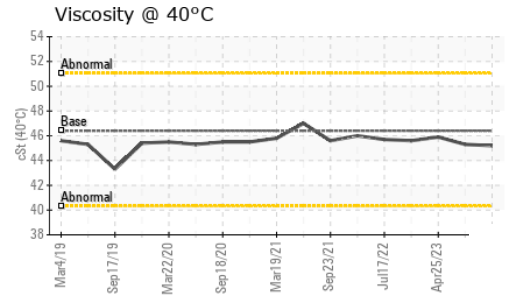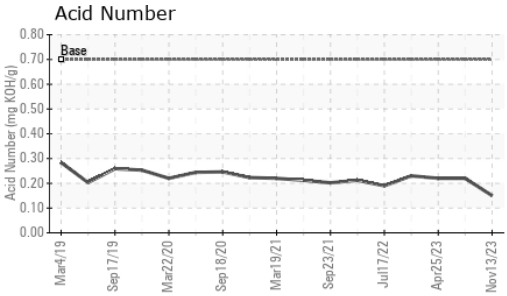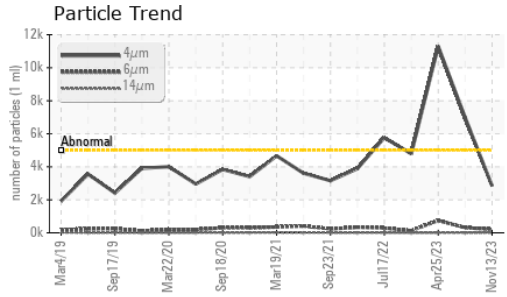






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.4	<b>45.2</b>	45.3	45.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

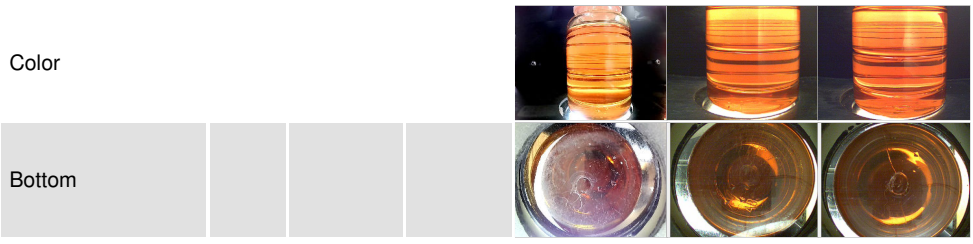

## GRAPHS

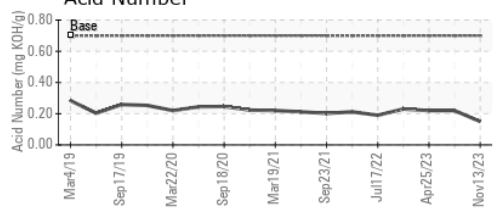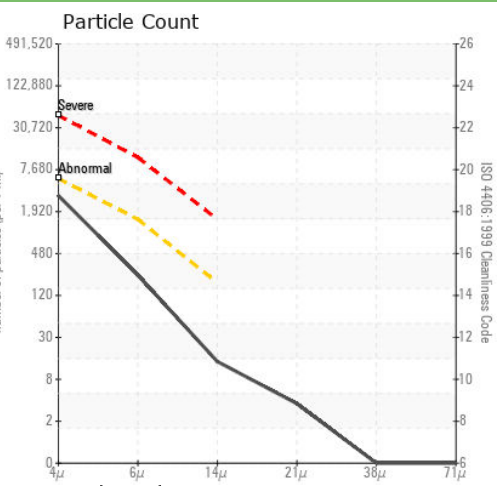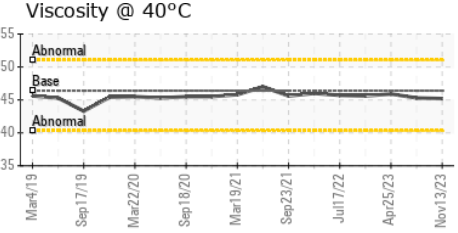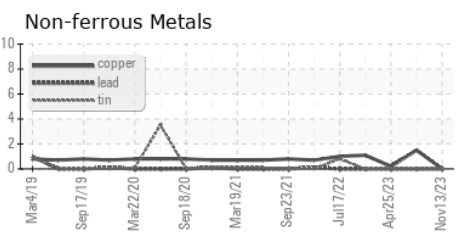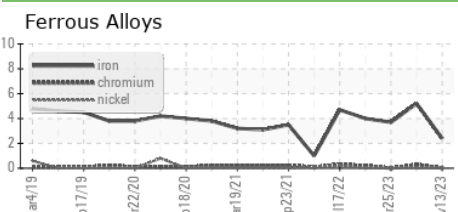

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0872407      **Received** : 14 Nov 2023  
**Lab Number** : 06007627      **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10741389      **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**PROGRESSIVE PROCESSING INC**  
 1205 CHAVENELLE CT  
 DUBUQUE, IA  
 US 52002  
 Contact: BLAINE PURDY  
 bepurdy@hormel.com  
 T: (563)557-4500  
 F: (563)557-4508

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)