


## **OIL ANALYSIS REPORT**

### Sample Rating Trend



NORMAL



# 1300CPR002

Component

Compressor

**GARDNER DENVER AEON 9000 SP (48 GAL)** 

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

<b>L)</b>		May202	3 Jui2023	Aug2023 No	v/2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0001936	PH0001941	PH0000838
Sample Date		Client Info		05 Nov 2023	28 Aug 2023	22 Jul 2023
Machine Age	hrs	Client Info		57844	57530	56676
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
lickel	ppm	ASTM D5185m		0	0	0
Fitanium -	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	2	<1
_ead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m		0	<1	<1
in	ppm	ASTM D5185m	>15	0	0	0
/anadium	ppm	ASTM D5185m	>10	0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	0	0	3
Calcium	ppm	ASTM D5185m	0	0	4	<1
Phosphorus	ppm	ASTM D5185m	800	732	798	754
Zinc	ppm	ASTM D5185m	0	0	13	2
Sulfur	ppm	ASTM D5185m	0	0	13	5
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2425	5021	2154
Particles >6µm		ASTM D7647	>2500	612	1132	431
Particles >14µm		ASTM D7647	>320	44	114	46
Particles >21µm		ASTM D7647	>80	9	43	15
Particles >38µm		ASTM D7647	>20	0	7	1
Particles >71µm		ASTM D7647	>4	0	2	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/13	20/17/14	18/16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.170	0.33	0.51	0.47



## **OIL ANALYSIS REPORT**

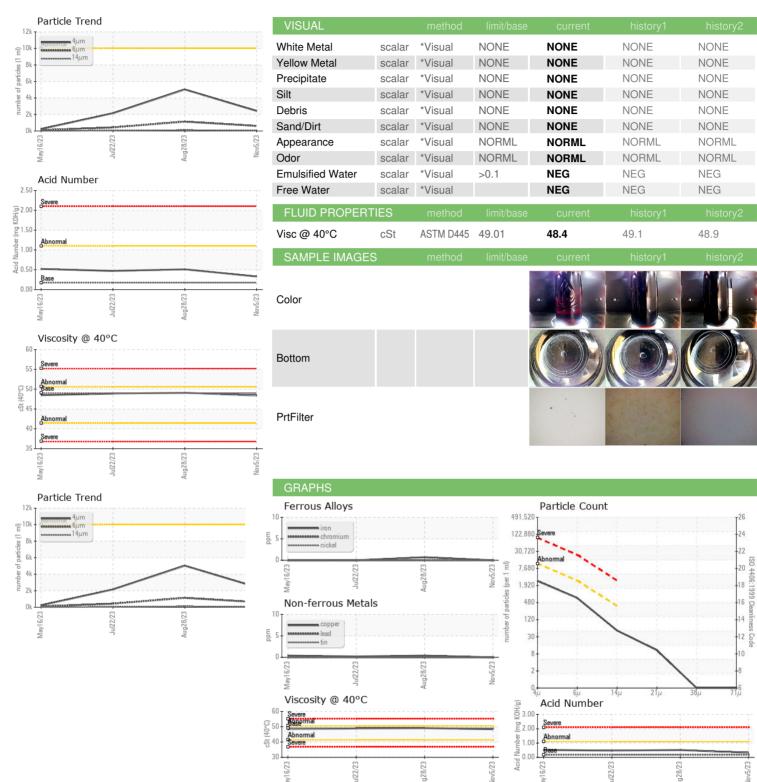





Certificate L2367

Report Id: APCFRA [WUSCAR] 06007630 (Generated: 11/20/2023 16:05:34) Rev: 2

Laboratory Sample No. Lab Number

**Unique Number** 

: 06007630 : 10741392 Test Package : PLANT To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 14 Nov 2023 : PH0001936

Diagnosed : 20 Nov 2023 : Angela Borella Diagnostician

127 SOUTHEAST PARKWAY FRANKLIN, TN US 37064

Contact: R Filipovic rfilipovic@apcom.com T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **APCOM** 

F: