




OIL ANALYSIS REPORT

Sample Rating Trend

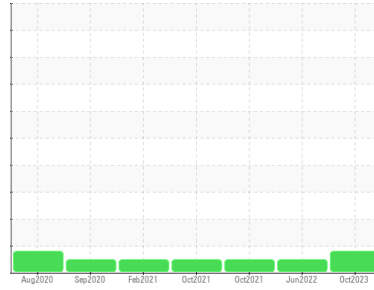

ISO



Area
METRO
 Machine Id
METRO 21037
 Component
Rear Differential
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843127	WC0712572	WC0642294
Sample Date	Client Info		26 Oct 2023	10 Jun 2022	13 Oct 2021
Machine Age	mls	Client Info	349959	205132	135638
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	348	196	132
Chromium	ppm	ASTM D5185m >10	2	1	1
Nickel	ppm	ASTM D5185m >10	3	<1	1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	3	2
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	1	<1	<1
Tin	ppm	ASTM D5185m >10	0	<1	0
Antimony	ppm	ASTM D5185m >5	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	56	66	85
Barium	ppm	ASTM D5185m	<1	0	<1
Molybdenum	ppm	ASTM D5185m	0	3	0
Manganese	ppm	ASTM D5185m	5	3	2
Magnesium	ppm	ASTM D5185m	180	196	182
Calcium	ppm	ASTM D5185m	5	0	5
Phosphorus	ppm	ASTM D5185m	1672	1853	1789
Zinc	ppm	ASTM D5185m	9	3	4
Sulfur	ppm	ASTM D5185m	22453	23787	34327

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	45	32	25
Sodium	ppm	ASTM D5185m	6	3	4
Potassium	ppm	ASTM D5185m >20	<1	0	<1
Water	%	ASTM D6304 >.2	0.033	0.036	0.055
ppm Water	ppm	ASTM D6304 >2000	333.3	364.1	558.1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 44078	---	---
Particles >6µm	ASTM D7647	>5000	2430	---	---
Particles >14µm	ASTM D7647	>640	49	---	---
Particles >21µm	ASTM D7647	>160	14	---	---
Particles >38µm	ASTM D7647	>40	0	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 23/18/13	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.76	0.76	0.587




OIL ANALYSIS REPORT


Particle Trend

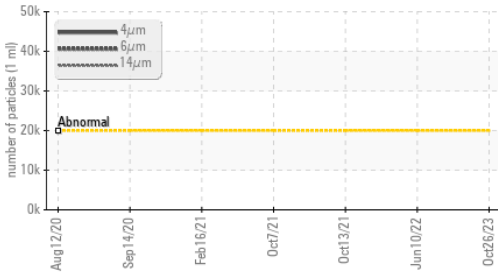


Water (KF)

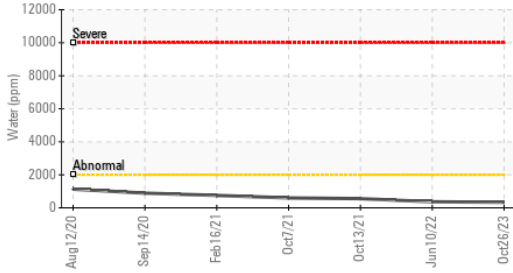


Viscosity @ 100°C

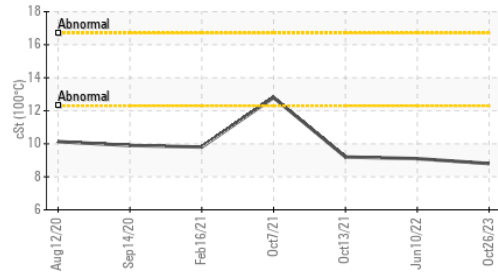

Water (KF)

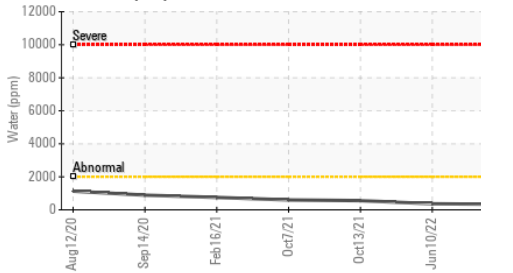

Viscosity @ 100°C

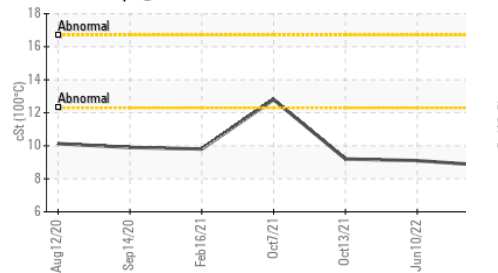

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.3	47.8	49.2
Visc @ 100°C	cSt	ASTM D445	8.8	9.1	9.2
Viscosity Index (VI)	Scale	ASTM D2270	172	175	171

SAMPLE IMAGES


	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS


Ferrous Alloys

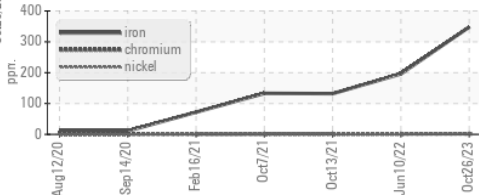


Non-ferrous Metals

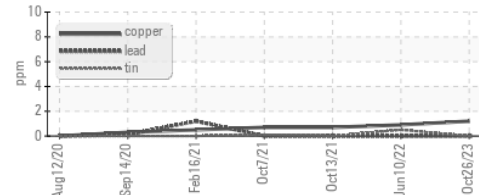


Viscosity @ 40°C

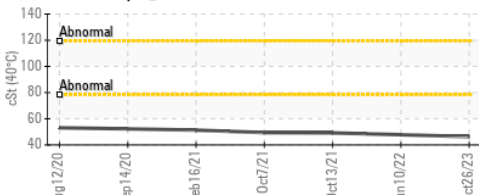

Particle Count

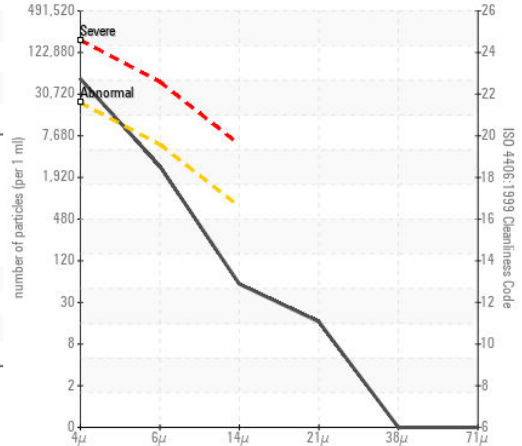

Acid Number

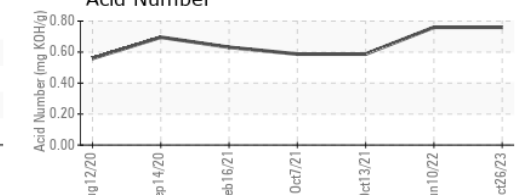

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0843127 Received : 14 Nov 2023
 Lab Number : 06007687 Diagnosed : 16 Nov 2023
 Unique Number : 10741449 Diagnostician : Don Baldrige
 Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: