

PROBLEM SUMMARY

Sample Rating Trend

ISO

Machine Id


KAESER SK15 5676560 (S/N 1005)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)



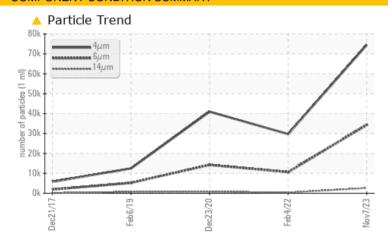

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	4 34333	<u>▲</u> 10644	<u>▲</u> 14238				
Particles >14μm	ASTM D7647	>80	2623	▲ 394	<u>^</u> 764				
Particles >21μm	ASTM D7647	>20	<u>▲</u> 512	<u>^</u> 74	<u>▲</u> 167				
Particles >38μm	ASTM D7647	>4	<u> </u>	3	<u>^</u> 6				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u>^</u> 23/22/19	<u>^</u> 21/16	<u>^</u> 21/17				

Customer Id: PENMILUS Sample No.: KCPA009419 Lab Number: 06007695 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

04 Feb 2022 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



23 Dec 2020 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



06 Feb 2019 Diag: Doug Bogart

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SK15 5676560 (S/N 1005)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Dec2017	Feb2019	Dec2020 Feb2022	Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009419	KCP35428	KCP27369
Sample Date		Client Info		07 Nov 2023	04 Feb 2022	23 Dec 2020
Machine Age	hrs	Client Info		17623	12273	8787
Oil Age	hrs	Client Info		0	3000	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	14	9	8
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	3	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	2	13	26
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	0	0
Zinc	ppm	ASTM D5185m	0	31	42	38
Sulfur	ppm	ASTM D5185m	23500	17413	18427	20283
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		1	5	6
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.005	0.005	0.010
ppm Water	ppm	ASTM D6304	>500	55.4	54.9	104.1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2

FLUID DEGRADATION

74514

34333

2623

512

5

0

23/22/19

current

Particles >4µm

Particles >6µm

Particles >14µm

Particles >21µm

Particles >38µm

Particles >71µm

Oil Cleanliness

ASTM D7647

ASTM D7647

ASTM D7647 >1300

ASTM D7647 >80

ASTM D7647 >20

ASTM D7647 >3

ISO 4406 (c) >--/17/13

limit/base

history1

29707

10644

<u></u> 394

<u>^</u> 74

3

0

<u></u> 21/16

history2

40968

14238

^ 764

167

0

21/17

<u></u> 6



OIL ANALYSIS REPORT

