

PROBLEM SUMMARY

Sample Rating Trend

ISO

Machine Id


KAESER SK 15T 5760991 (S/N 1734)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

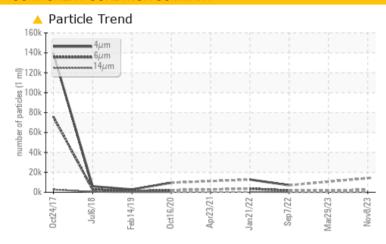

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status			ATTENTION	ABNORMAL	ABNORMAL					
Particles >6µm	ASTM D7647	>1300	<u> </u>		<u>▲</u> 1787					
Particles >14µm	ASTM D7647	>80	<u> </u>		<u> </u>					
Particles >21µm	ASTM D7647	>20	<u> </u>		<u>▲</u> 82					
Particles >38µm	ASTM D7647	>4	<u> </u>		<u></u> 6					
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>		<u>^</u> 20/18/15					

Customer Id: ENTMEN Sample No.: KCPA009189 Lab Number: 06007712 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

29 Mar 2023 Diag: Don Baldridge

VIS DEBRIS



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



07 Sep 2022 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



21 Jan 2022 Diag: Jonathan Hester

ISO




The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

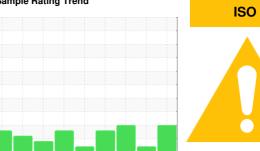

KAESER SK 15T 5760991 (S/N 1734)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Oct2017 Jul	2018 Feb 2019 Oct2020	Apr2021 Jan2022 Sep2022 Mar202	3 Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009189	KCPA001314	KCP33292
Sample Date		Client Info		08 Nov 2023	29 Mar 2023	07 Sep 2022
Machine Age	hrs	Client Info		31274	28108	25517
Oil Age	hrs	Client Info		0	0	3000
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	13	5	12
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	7	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	11	2
Zinc	ppm	ASTM D5185m		0	5	6
Sulfur	ppm	ASTM D5185m		17730	17425	17304
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	<1
Sodium	ppm	ASTM D5185m		<1	0	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.011	0.008	0.026
ppm Water	ppm	ASTM D6304	>500	110.3	82.0	262.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		14194		7062
Particles >6µm		ASTM D7647	>1300	<u>^</u> 2418		▲ 1787
Particles >14µm		ASTM D7647	>80	<u> </u>		▲ 188
Particles >21µm		ASTM D7647	>20	<u>^</u> 50		▲ 82
Particles >38µm		ASTM D7647	>4	<u>^</u> 7		6
Particles >71µm		ASTM D7647	>3	1		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>21/18/14</u>		<u>^</u> 20/18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.36

0.37



OIL ANALYSIS REPORT

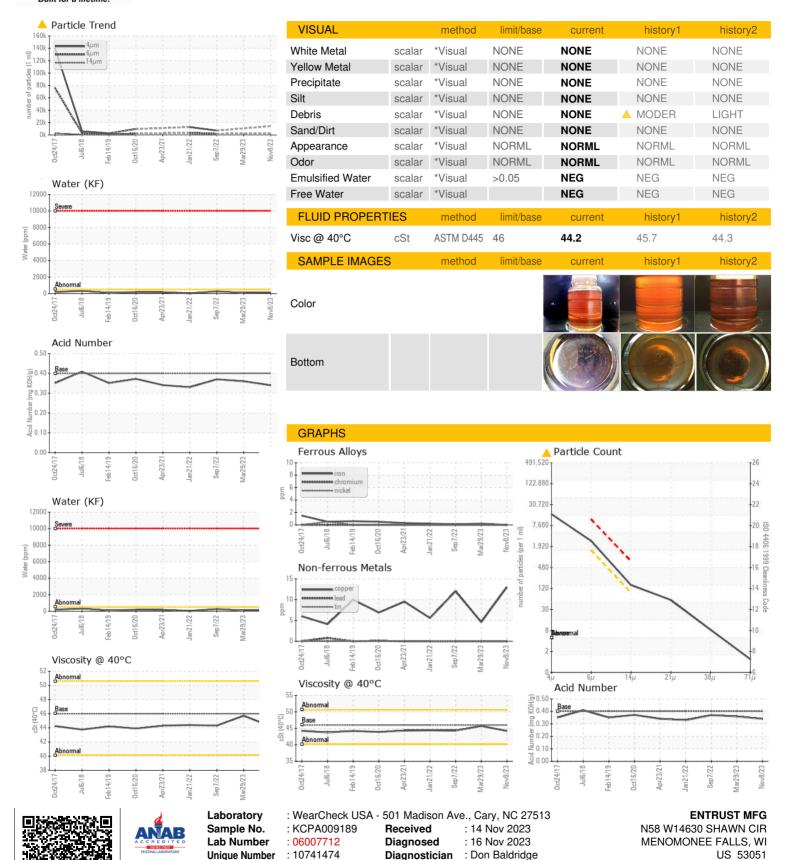

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate L2367

T: F:

Contact: S. JACOBSON

sjacobson@entrustmf.com