


# **PROBLEM SUMMARY**

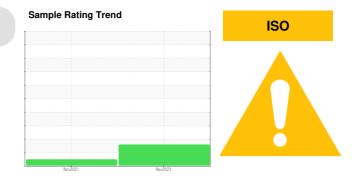


#### Machine Id KAESER 7919089 (S/N 1068) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

# COMPONENT CONDITION SUMMARY

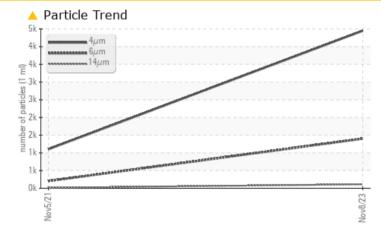

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status

Sample Status			ATTENTION	NORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	204	
Particles >14µm	ASTM D7647	>80	🔺 111	13	
Particles >21µm	ASTM D7647	>20	<u> </u>	3	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>  19/18/14</b>	15/11	

Customer Id: REYMOU Sample No.: KCPA005931 Lab Number: 06007720 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

# 05 Nov 2021 Diag: Don Baldridge

NORMAL




Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

SAMPLE INFORMATION

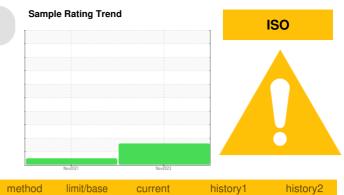

history1

current

#### Machine Id KAESER 7919089 (S/N 1068) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

# DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		methou	IIIIII/Dase	Current	Thistory I	Thistory2
Sample Number		Client Info		KCPA005931	KCP43242	
Sample Date		Client Info		08 Nov 2023	05 Nov 2021	
Machine Age	hrs	Client Info		14443	2402	
Oil Age	hrs	Client Info		0	2402	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ATTENTION	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m		0	4	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper		ASTM D5185m		6	7	
Tin	ppm		>10	0	0	
	ppm		>10		0	
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	17	
Barium	ppm	ASTM D5185m	90	0	<1	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	0	20	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	4	
Zinc	ppm	ASTM D5185m	0	0	60	
Sulfur	ppm	ASTM D5185m	23500	17515	20663	
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	
Sodium	ppm	ASTM D5185m		2	13	
Potassium	ppm	ASTM D5185m	>20	0	12	
Water	%	ASTM D6304	>0.05	0.009	0.017	
ppm Water	ppm	ASTM D6304	>500	93.9	172.7	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4449	1103	
Particles >6µm		ASTM D7647	>1300	<u> </u>	204	
Particles >14µm		ASTM D7647	>80	<u> </u>	13	
Particles >21µm		ASTM D7647	>20	<u> </u>	3	
Particles >38µm		ASTM D7647	>4	2	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>1</b> 9/18/14	15/11	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.45	0.363	
53:26) Bev: 1				Contact/Locatio		ager - REYMO


Report Id: REYMOU [WUSCAR] 06007720 (Generated: 11/17/2023 06:53:26) Rev: 1


Contact/Location: Service Manager - REYMOU



# Built for a lifetime."

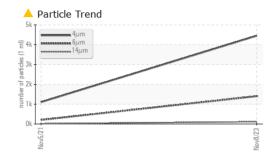

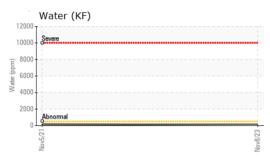

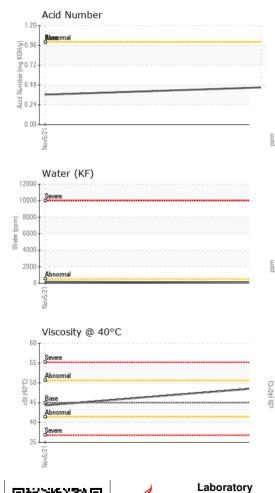

ŝ

# **OIL ANALYSIS REPORT**

	VISUAL		method	limit/base	current	history1	history
-	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
	Silt	scalar	*Visual	NONE	NONE	NONE	
APRAME.	Debris	scalar	*Visual	NONE	LIGHT	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
6	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
	Free Water	scalar	*Visual	20.00	NEG	NEG	
-	FLUID PROPER		method	limit/base			history
	Visc @ 40°C	cSt	ASTM D445		current 48.7	history1 44.3	history
Ξ.	-						la la ta m
	SAMPLE IMAGE	5	method	limit/base	current	history1	history
Nov8/23	Color						no image
	Bottom					()	no image
	GRAPHS						
	Ferrous Alloys				Particle Count		
1	ion			491,520	Ι		
	8 - chromium			122,880			
mqq	6 - nickel						
	4 •			30,720	+		
	2			7,680	· · ·		
					1		
0	Nov5/21			Nov 1,920			••••
	Non-ferrous Meta	s		Nov802 (m 1.920) (m 1.920)			
1				of pa			
	8 - copper			120	-	~	
bbw	6 tin			2			
đ	4						
	2 -			8	<b>Bibreve</b> mal		\
	0 2 2			£2 2.	-		
	Nov5/21			Nov8/23			
				- 0. 4	μ 6μ	14µ 21µ	38µ 71
6	Viscosity @ 40°C				Acid Number		
5	Smuara			(B) 1.20-	Basermal		
				Q 0.96			
(0-0 <del>1</del> ) tSo	5 Base			(1.20) (1			
4				E 0.40	[ <del></del>		
3	Severe						
	Nov5/21			Nov8/23	Nov5/2		
<b>y</b> :	WearCheck USA -	501 Madi	son Ave Ca	rv. NC 27513	REYCO	) GRANNING S	USPENSIO

US 65712 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - REYMOU