


### **PROBLEM SUMMARY**

# KAESER SK 20 5780309 (S/N 1903)

Compressor Fluid

### KAESER SIGMA (OEM) S-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

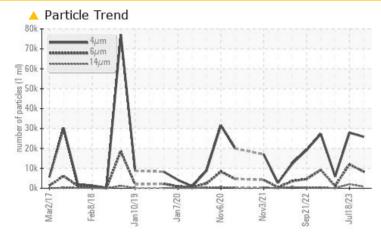

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### PROBLEMATIC TEST RESULTS

THOBELM/THO TEOTT	LOOLIO				
Sample Status			ABNORMAL	ABNORMAL	ATTENTION
Particles >6µm	ASTM D7647	>1300	<u> </u>	<b>1</b> 2004	1126
Particles >14µm	ASTM D7647	>80	<u> </u>	<u> </u>	<b>A</b> 89
Particles >21µm	ASTM D7647	>20	<u> </u>	<b>A</b> 781	<b>A</b> 31
Particles >38µm	ASTM D7647	>4	<u> </u>	🔺 55	1
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	🔺 22/21/18	<b>2</b> 0/17/14


Customer Id: AKIWIN Sample No.: KC06007737 Lab Number: 06007737 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

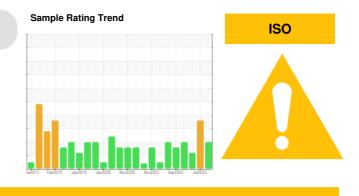

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### **HISTORICAL DIAGNOSIS**

#### 18 Jul 2023 Diag: Don Baldridge



The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid.





#### 17 Mar 2023 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report



08 Dec 2022 Diag: Jonathan Hester

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





### **OIL ANALYSIS REPORT**

# KAESER SK 20 5780309 (S/N 1903)

**Compressor** 

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


# Sample Rating Trend ISO ISO ISO


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06007737	KC05909481	KC05813934
Sample Date		Client Info		31 Oct 2023	18 Jul 2023	17 Mar 2023
Machine Age	hrs	Client Info		49386	47890	45372
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		4	8	12
Tin	ppm		>10	0	0	0
Vanadium	ppm	ASTM D5185m	-	<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	0	<1	7
Calcium	ppm	ASTM D5185m	2	0	0	2
Phosphorus	ppm	ASTM D5185m		0	<1	4
Zinc	ppm	ASTM D5185m		0	0	19
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	0	<1	<1
Sodium	ppm	ASTM D5185m		10	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water	%	ASTM D6304	>0.05	0.011	▲ 0.113	0.009
ppm Water	ppm	ASTM D6304	>500	111.9	▲ 1131.8	98.1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		25834	27872	5904
Particles >6µm		ASTM D7647		<u> </u>	12004	1126
Particles >14µm		ASTM D7647	>80	<u> </u>	<u> </u>	<u> </u>
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	<b>A</b> 31
Particles >38µm		ASTM D7647	>4	<mark>/</mark> 6	<b>4</b> 55	1
Particles >71µm		ASTM D7647	>3	0	2	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/20/17	▲ 22/21/18	▲ 20/17/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.28	0.33	0.28





## **OIL ANALYSIS REPORT**


method

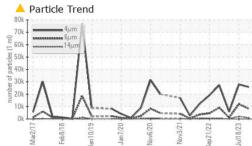


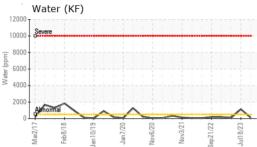

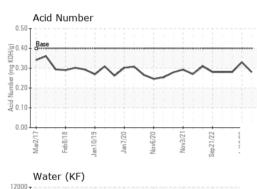








White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.9	44.8	46.2
SAMPLE IMAGES	6	method	limit/base	current	history1	history2

limit/base

current

Color


VISUAL



history1

history2

Bottom

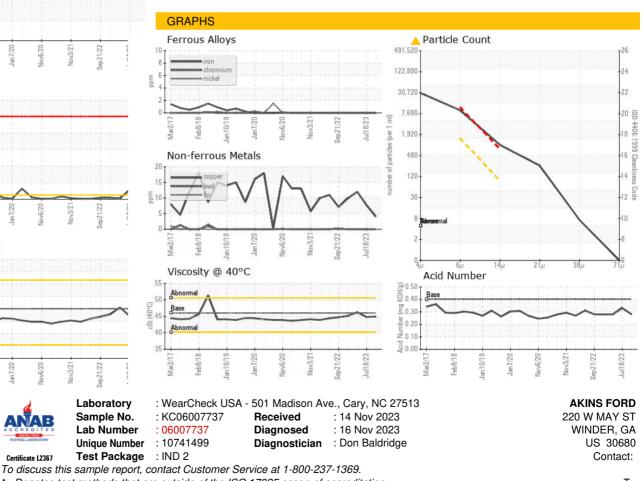

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

Certificate L2367

Contact/Location: ? ? - AKIWIN

Page 4 of 4