


# PROBLEM SUMMARY

Sample Rating Trend




ISO

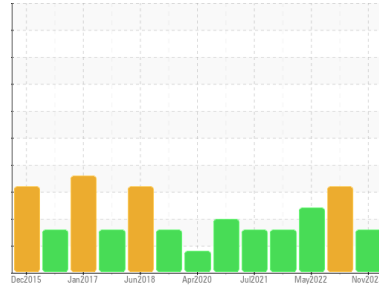

Machine Id  
**KAESER SK 20T 5368260 (S/N 1473)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

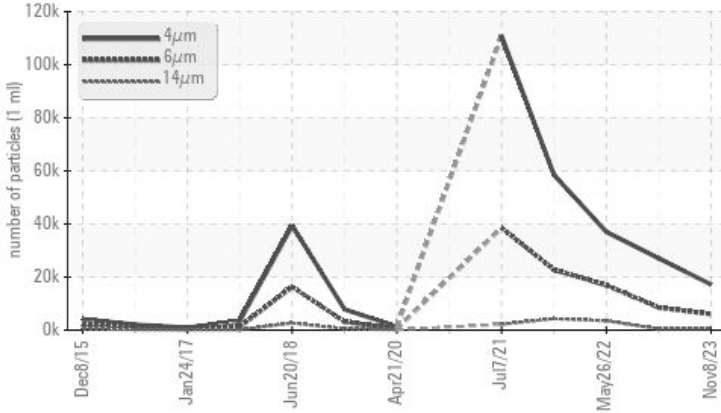

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |        | ABNORMAL | ABNORMAL | ABNORMAL |
|-----------------|--------------|--------|----------|----------|----------|
| Particles >6µm  | ASTM D7647   | >1300  | ▲ 6056   | ▲ 8523   | ▲ 16925  |
| Particles >14µm | ASTM D7647   | >80    | ▲ 526    | ▲ 456    | ▲ 3503   |
| Particles >21µm | ASTM D7647   | >20    | ▲ 129    | ▲ 60     | ▲ 874    |
| Oil Cleanliness | ISO 4406 (c) | >17/13 | ▲ 20/16  | ▲ 20/16  | ▲ 21/19  |

Customer Id: NEWARD  
Sample No.: KC06007746  
Lab Number: 06007746  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 19 Apr 2023 Diag: Don Baldrige

WATER



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition. All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



### 26 May 2022 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 29 Nov 2021 Diag: Doug Bogart

ISO




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

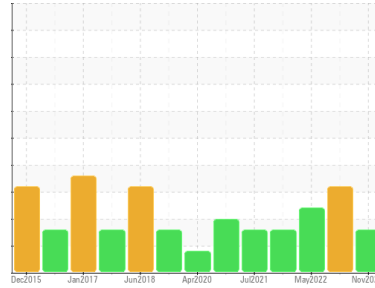

ISO



Machine Id  
**KAESER SK 20T 5368260 (S/N 1473)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>KC06007746</b>  | KC05830266  | KC05592603  |
| Sample Date   | Client Info |             | <b>08 Nov 2023</b> | 19 Apr 2023 | 26 May 2022 |
| Machine Age   | hrs         | Client Info | <b>27984</b>       | 25506       | 21109       |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | Changed     |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | ABNORMAL    |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >50 | <b>0</b>     | 1        | <1       |
| Chromium | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m >3  | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m >3  | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2  | <b>0</b>     | 0        | <1       |
| Aluminum | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | <1       |
| Lead     | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >50 | <b>14</b>    | 20       | 21       |
| Tin      | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Antimony | ppm    | ASTM D5185m     | <b>---</b>   | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base     | current      | history1 | history2 |
|------------|--------|----------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m    | <b>0</b>     | 0        | 0        |
| Barium     | ppm    | ASTM D5185m 90 | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m    | <b>0</b>     | 0        | 0        |
| Manganese  | ppm    | ASTM D5185m    | <b>&lt;1</b> | 2        | <1       |
| Magnesium  | ppm    | ASTM D5185m 90 | <b>0</b>     | 14       | 4        |
| Calcium    | ppm    | ASTM D5185m 2  | <b>0</b>     | <1       | 0        |
| Phosphorus | ppm    | ASTM D5185m    | <b>0</b>     | <1       | 6        |
| Zinc       | ppm    | ASTM D5185m    | <b>6</b>     | 36       | 18       |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25  | <b>0</b>     | <1       | <1       |
| Sodium    | ppm    | ASTM D5185m      | <b>15</b>    | 4        | 1        |
| Potassium | ppm    | ASTM D5185m >20  | <b>0</b>     | 2        | 0        |
| Water     | %      | ASTM D6304 >0.05 | <b>0.016</b> | ▲ 0.151  | 0.013    |
| ppm Water | ppm    | ASTM D6304 >500  | <b>165.4</b> | ▲ 1510   | 137.6    |






## FLUID CLEANLINESS

|                 | method       | limit/base | current        | history1 | history2 |
|-----------------|--------------|------------|----------------|----------|----------|
| Particles >4µm  | ASTM D7647   |            | <b>17187</b>   | 27079    | 37010    |
| Particles >6µm  | ASTM D7647   | >1300      | ▲ <b>6056</b>  | ▲ 8523   | ▲ 16925  |
| Particles >14µm | ASTM D7647   | >80        | ▲ <b>526</b>   | ▲ 456    | ▲ 3503   |
| Particles >21µm | ASTM D7647   | >20        | ▲ <b>129</b>   | ▲ 60     | ▲ 874    |
| Particles >38µm | ASTM D7647   | >4         | <b>3</b>       | 1        | ▲ 50     |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>       | 0        | ▲ 3      |
| Oil Cleanliness | ISO 4406 (c) | >17/13     | ▲ <b>20/16</b> | ▲ 20/16  | ▲ 21/19  |

## FLUID DEGRADATION

|                  | method   | limit/base     | current     | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.4 | <b>0.23</b> | 0.32     | 0.34     |

# OIL ANALYSIS REPORT

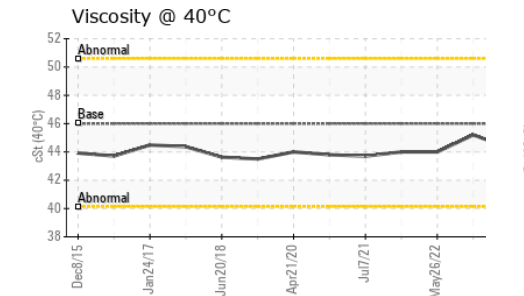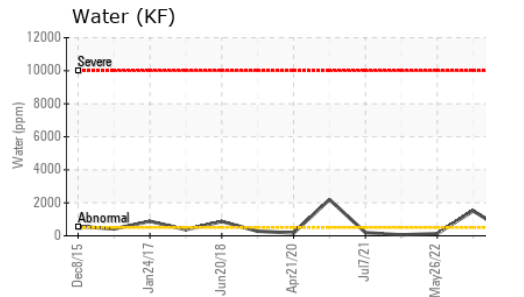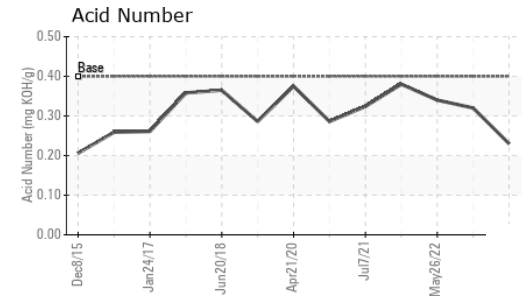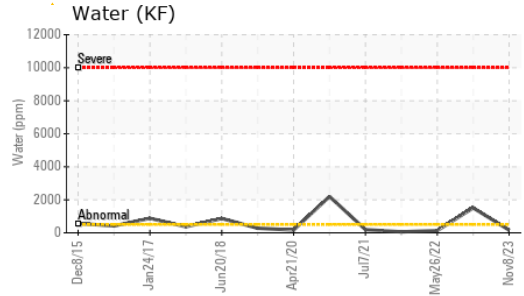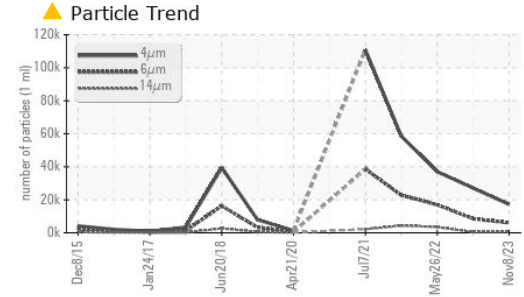





| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | LIGHT    | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | 0.2%     |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | 44.3    | 45.2     | 44.0     |

**SAMPLE IMAGES**

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color  |            |         |          |          |
| Bottom |            |         |          |          |

**GRAPHS**

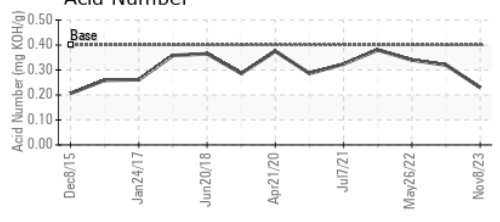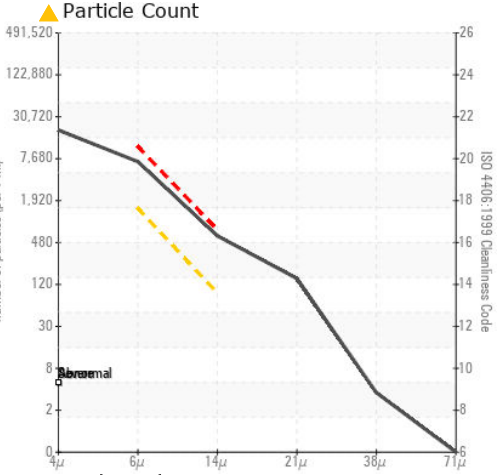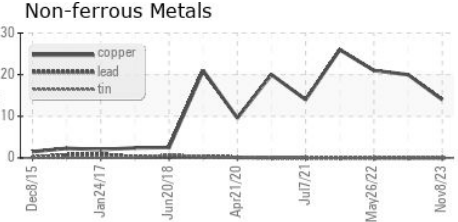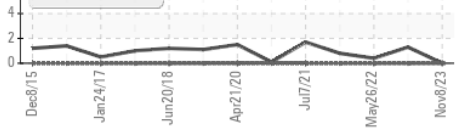

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC06007746 **Received** : 14 Nov 2023  
**Lab Number** : 06007746 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10741508 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**NEW PECO**  
 10 WALDEN DR  
 ARDEN, NC  
 US 28704  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: