

OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



DE Samples - CAT LAB
Machine Id
CATERPILLAR D8 DOZER 6483 (S/N 6YZ01920)

Diesel Engine

TULCO LUBSOIL CK-4 15W40 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Moor

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Get2015 May2017 Aug2019 Nov2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO10002899	TO1006754	TO1006192
Sample Date		Client Info		06 Nov 2023	16 Aug 2019	14 Aug 2017
Machine Age	hrs	Client Info		22911	20286	18656
Oil Age	hrs	Client Info		340	260	300
Oil Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	24	25	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m		2	<1	2
Lead	ppm	ASTM D5185m	>40	<1	4	<1
Copper	ppm	ASTM D5185m		104	27	96
Coppei Tin		ASTM D5185m		<1	0	<1
	ppm		>10	< I 		0
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		41	7	54
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	65	69	38	61
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	1060	849	565	826
Calcium	ppm	ASTM D5185m	1140	1262	753	1343
Phosphorus	ppm	ASTM D5185m	1170	1066	611	1037
Zinc	ppm	ASTM D5185m	1230	1267	754	1130
Sulfur	ppm	ASTM D5185m	3130	3260	1730	2027
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	<1	5
Sodium	ppm	ASTM D5185m		<1	3	2
Potassium	ppm	ASTM D5185m	>20	2	5	0
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	7.8	7.8	6.
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	20.1	16.
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	14.6	12.
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	9.81	9.05	9.32



OIL ANALYSIS REPORT

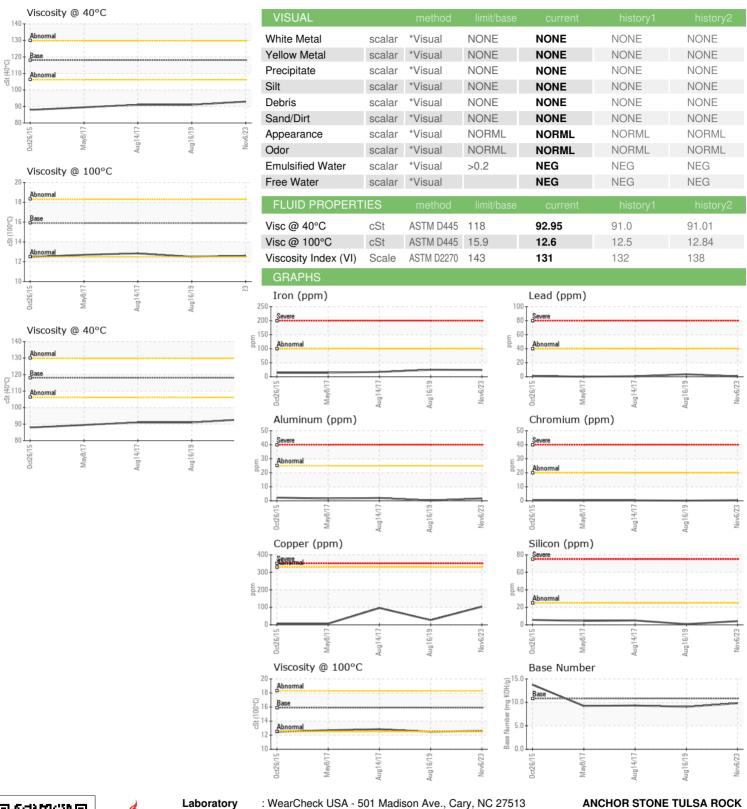





Laboratory Sample No. Lab Number **Unique Number**

: TO10002899 : 06007820 : 10741582

Received : 14 Nov 2023 Diagnosed

: 20 Nov 2023

: Sean Felton Diagnostician

Test Package : MOB 2 (Additional Tests: KV40, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK US 74137

Contact: MIKE SNYDER msnyder@anchorstoneco.com

T: (417)850-9635

F: