

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



STARLINE SL-5256-4A 19 (S/N 05300)

Hydraulic System

NOT GIVEN (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.


Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			Aug2023	Nov2023		
SAMPLE INFORMA	NOITA	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0002368	PH0002000	
Sample Date		Client Info		14 Nov 2023	28 Aug 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	0	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	
Copper	ppm	ASTM D5185m	>20	0	0	
Tin p	ppm	ASTM D5185m	>20	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	2	
Molybdenum p	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		<1	0	
Calcium	ppm	ASTM D5185m		0	0	
	ppm	ASTM D5185m		378	448	
	ppm	ASTM D5185m		0	0	
	ppm	ASTM D5185m		97	96	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	

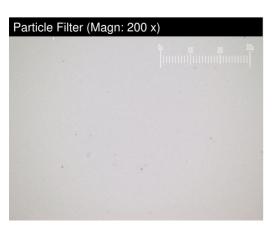

CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	
FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	9766	704	
Particles >6µm		ASTM D7647	>2500	2305	232	
Particles >14µm		ASTM D7647	>320	79	43	
Particles >21µm		ASTM D7647	>80	16	17	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/18/13	17/15/13	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.046	0.042	



OIL ANALYSIS REPORT

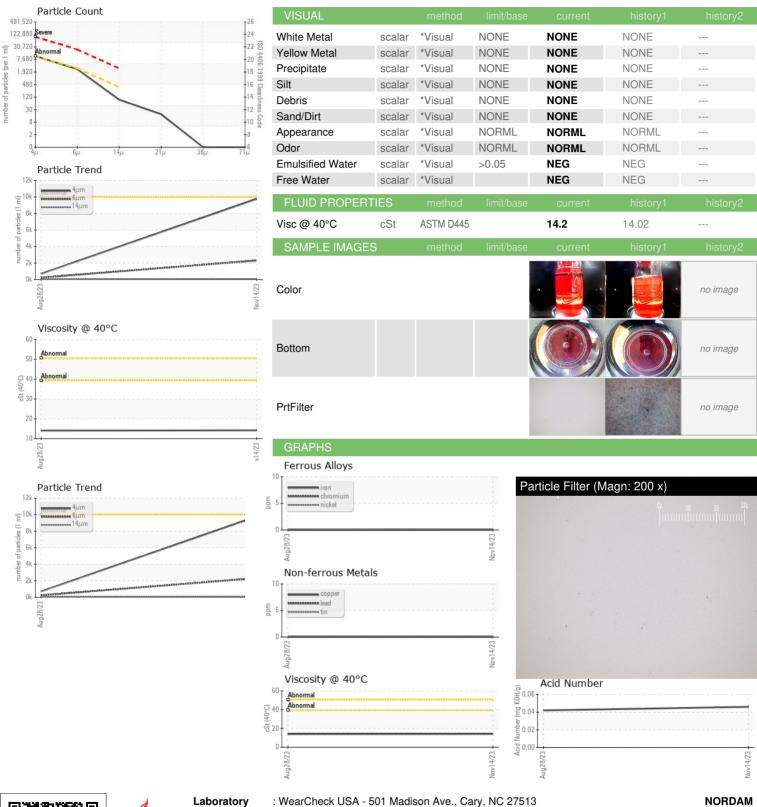





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PH0002368 : 06007961 : 10741723

Recieved Diagnosed

: 20 Nov 2023 : Angela Borella Diagnostician

: 14 Nov 2023

Test Package : PLANT (Additional Tests: PrtFilter)

kbodenhamer@nordam.com T: (918)401-5219

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TULSA, OK

US 74117

F:

6911 WHILPOOL DR

Contact: KURT BODENHAMER