




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

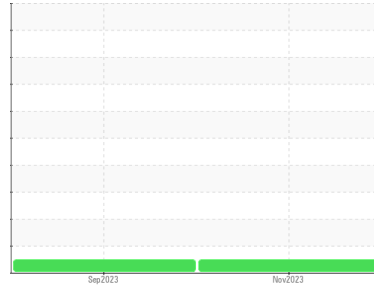

Machine Id  
**STARLINE SL-5250-4G 36 (S/N 04245)**

Component  
**Hydraulic System**

Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number      | Client Info |             |            | <b>PH0002372</b>   | PH0001818   | ---      |
| Sample Date        | Client Info |             |            | <b>14 Nov 2023</b> | 05 Sep 2023 | ---      |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | ---      |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | ---      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | ---      |

| WEAR METALS |     | method      | limit/base | current  | history1 | history2 |
|-------------|-----|-------------|------------|----------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>0</b> | 0        | ---      |
| Chromium    | ppm | ASTM D5185m | >20        | <b>0</b> | 6        | ---      |
| Nickel      | ppm | ASTM D5185m | >20        | <b>0</b> | 0        | ---      |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b> | 0        | ---      |
| Silver      | ppm | ASTM D5185m |            | <b>0</b> | 0        | ---      |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>0</b> | <1       | ---      |
| Lead        | ppm | ASTM D5185m | >20        | <b>0</b> | 0        | ---      |
| Copper      | ppm | ASTM D5185m | >20        | <b>2</b> | <1       | ---      |
| Tin         | ppm | ASTM D5185m | >20        | <b>0</b> | <1       | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b> | <1       | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b> | <1       | ---      |


| ADDITIVES  |     | method      | limit/base | current    | history1 | history2 |
|------------|-----|-------------|------------|------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Magnesium  | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Calcium    | ppm | ASTM D5185m |            | <b>0</b>   | <1       | ---      |
| Phosphorus | ppm | ASTM D5185m |            | <b>690</b> | 10000    | ---      |
| Zinc       | ppm | ASTM D5185m |            | <b>3</b>   | 0        | ---      |
| Sulfur     | ppm | ASTM D5185m |            | <b>52</b>  | 2142     | ---      |

| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >15        | <b>4</b> | <1       | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>0</b> | 2        | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 12       | ---      |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   | >10000     | <b>640</b>      | 2486     | ---      |
| Particles >6µm    |  | ASTM D7647   | >2500      | <b>104</b>      | 495      | ---      |
| Particles >14µm   |  | ASTM D7647   | >320       | <b>6</b>        | 69       | ---      |
| Particles >21µm   |  | ASTM D7647   | >80        | <b>2</b>        | 24       | ---      |
| Particles >38µm   |  | ASTM D7647   | >20        | <b>0</b>        | 1        | ---      |
| Particles >71µm   |  | ASTM D7647   | >4         | <b>0</b>        | 0        | ---      |
| Oil Cleanliness   |  | ISO 4406 (c) | >20/18/15  | <b>16/14/10</b> | 18/16/13 | ---      |





| FLUID DEGRADATION |          | method     | limit/base | current      | history1 | history2 |
|-------------------|----------|------------|------------|--------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.203</b> | 0.284    | ---      |

Particle Filter (Magn: 200 x)

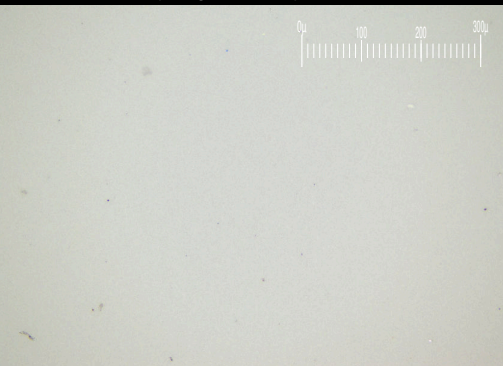



# OIL ANALYSIS REPORT

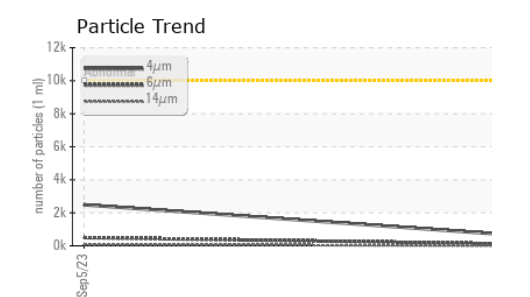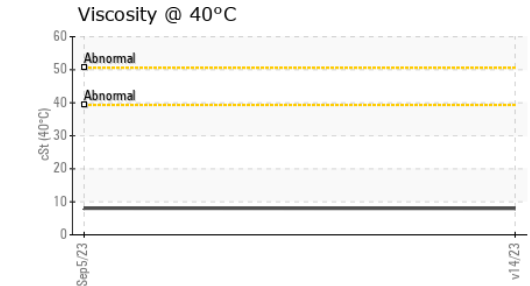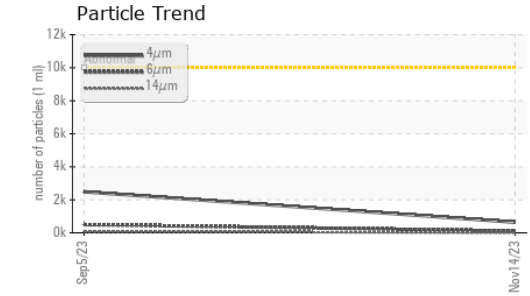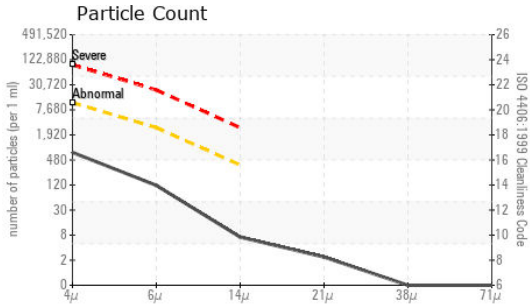

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0002372 **Received** : 14 Nov 2023  
**Lab Number** : **06007962** **Diagnosed** : 20 Nov 2023  
**Unique Number** : 10741724 **Diagnostician** : Angela Borella  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

**NORDAM**  
 6911 WHILPOOL DR  
 TULSA, OK  
 US 74117  
 Contact: KURT BODENHAMER  
 kbodenhamer@nordam.com  
 T: (918)401-5219  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current     | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | <b>8.01</b> | 8.05     | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         |          | no image |
| Bottom        |        |            |         |          | no image |
| PrtFilter     |        |            |         |          | no image |

## GRAPHS

