




PROBLEM SUMMARY

Sample Rating Trend

VISCOSITY




Area
OKLAHOMA/102/EG - SKID STEER
 Machine Id
53.151L [OKLAHOMA^102^EG - SKID STEER]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (4 GAL)

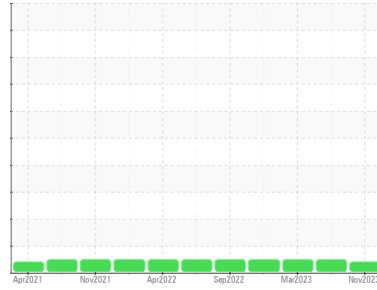

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

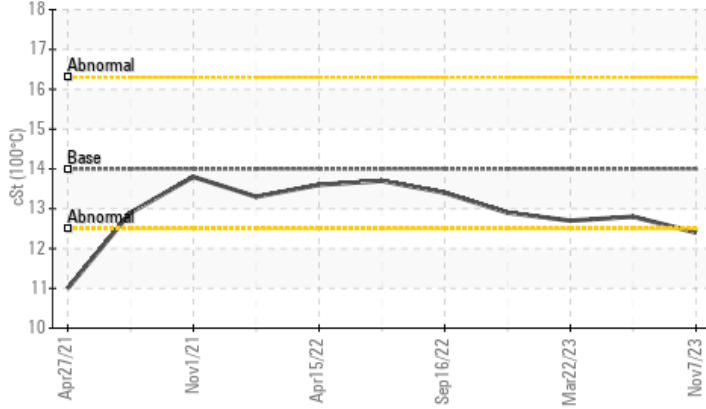

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	NORMAL
Visc @ 100°C	cSt	ASTM D445	14	▲ 12.4	12.8	12.7

Customer Id: SHEWIC
 Sample No.: WC0857275
 Lab Number: 06008128
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

11 Jul 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



22 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



19 Dec 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)






OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Area
OKLAHOMA/102/EG - SKID STEER
 Machine Id
53.151L [OKLAHOMA^102^EG - SKID STEER]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (4 GAL)

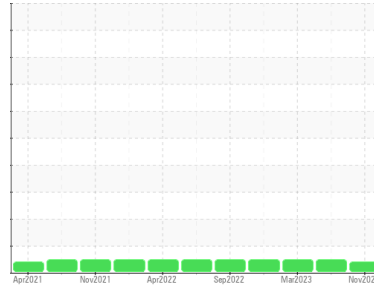

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0857275	WC0821820	WC0800763
Sample Date	Client Info		07 Nov 2023	11 Jul 2023	22 Mar 2023
Machine Age	hrs	Client Info	3522	2878	2606
Oil Age	hrs	Client Info	644	272	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	9	7
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	2	2
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	<1	1	<1
Tin	ppm	ASTM D5185m >15	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	52	40	41
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	41	42	40
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m 0	523	521	503
Calcium	ppm	ASTM D5185m	1658	1806	1609
Phosphorus	ppm	ASTM D5185m	791	730	682
Zinc	ppm	ASTM D5185m	946	915	893
Sulfur	ppm	ASTM D5185m	2585	2765	2254





CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	5	5
Sodium	ppm	ASTM D5185m	2	3	2
Potassium	ppm	ASTM D5185m >20	0	0	0
Fuel	%	ASTM D3524 >5	1.5	<1.0	<1.0

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	8.4	9.1	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.2	22.7	23.5

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	23.1	21.7	23.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	9.6	9.0	9.0







OIL ANALYSIS REPORT

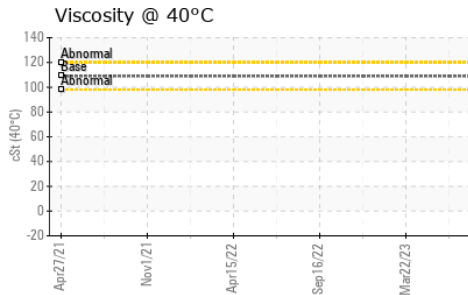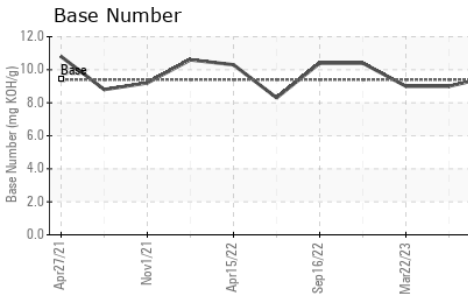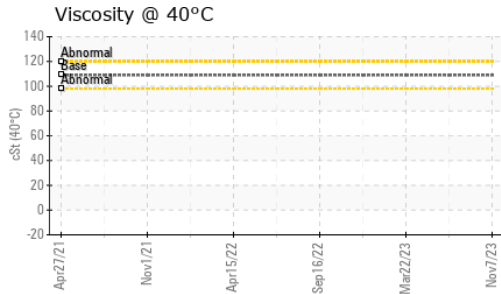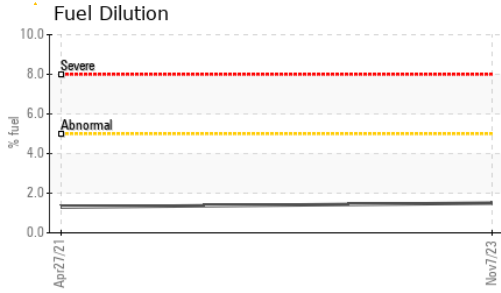

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	▲ 12.4	12.8	12.7

GRAPHS

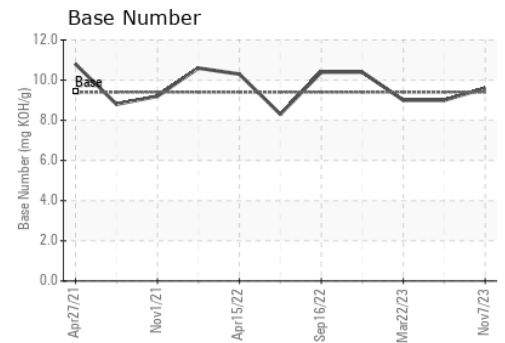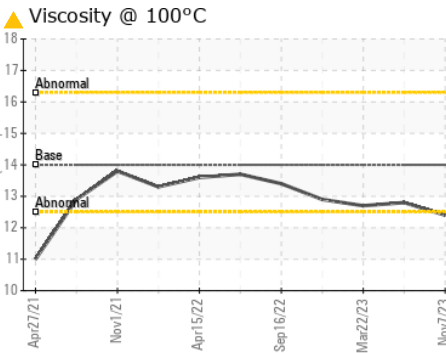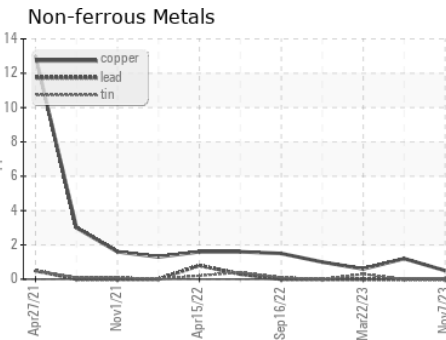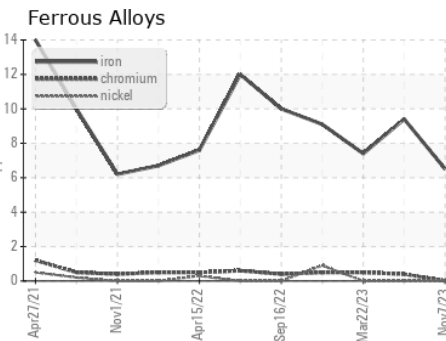

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0857275 **Received** : 15 Nov 2023
Lab Number : 06008128 **Diagnosed** : 17 Nov 2023
Unique Number : 10741890 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, KV40, PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)