

OIL ANALYSIS REPORT

Sample Rating Trend



Area 21 Machine Id [21] A21 R1A Component Agitator Gearbox Fluid Turbine Life 100 (1 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Particle count performed inadvertently. (Customer Sample Comment: Turbine Life 100)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jec2017 Nov2	018 Oct2019 May2020	May2021 May2022 Oct2022	Jul2023			
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		HPL0003004	HPL0003184	HPL0002771		
Sample Date		Client Info		10 Nov 2023	18 Jul 2023	05 May 2023		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		20880	16560	12240		
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
CONTAMINATION		method	limit/base	current	history1	history2		
Water		WC Method	>0.1	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>150	0	1	3		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m	>10	0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>25	1	1	<1		
Lead	ppm	ASTM D5185m	>100	0	0	0		
Copper	ppm	ASTM D5185m	>50	<1	0	<1		
Tin	ppm	ASTM D5185m	>10	0	0	0		
/anadium	ppm	ASTM D5185m		<1	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	2		
Barium	ppm	ASTM D5185m		0	<1	0		
Volybdenum	ppm	ASTM D5185m		0	0	<1		
Vanganese	ppm	ASTM D5185m		<1	<1	0		
Vagnesium	ppm	ASTM D5185m		0	<1	4		
Calcium	ppm	ASTM D5185m		171	186	180		
Phosphorus	ppm	ASTM D5185m		13	9	9		
Zinc	ppm	ASTM D5185m		9	8	23		
Sulfur	ppm	ASTM D5185m		20474	23945	19259		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m		<1	0	<1		
Sodium	ppm	ASTM D5185m	200	2	1	0		
Potassium	ppm	ASTM D5185m	>20	1	<1	1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>20000	751				
Particles >6µm		ASTM D7647		181				
Particles >14µm		ASTM D7647	>640	15				
Particles >21µm		ASTM D7647	>160	4				
Particles >38µm		ASTM D7647	>40	0				
Particles >71µm		ASTM D7647	>10	0				
Oil Cleanliness		ISO 4406 (c)	>21/19/16	17/15/11				
FLUID DEGRADA	TIO <u>N</u>	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045		0.14	0.16	0.23		
21:20) Rev: 1	99							
0/ 104. 1					Submitted By: TIM HUBERT			



OIL ANALYSIS REPORT

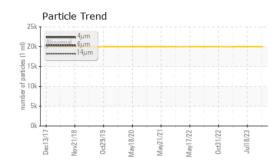

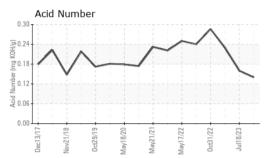

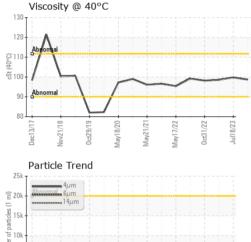

5

0


Dec13/17

Vov21/18

0ct29/19

Mav18/20

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		98.7	99.8	98.6
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					no image	
Bottom					no image	

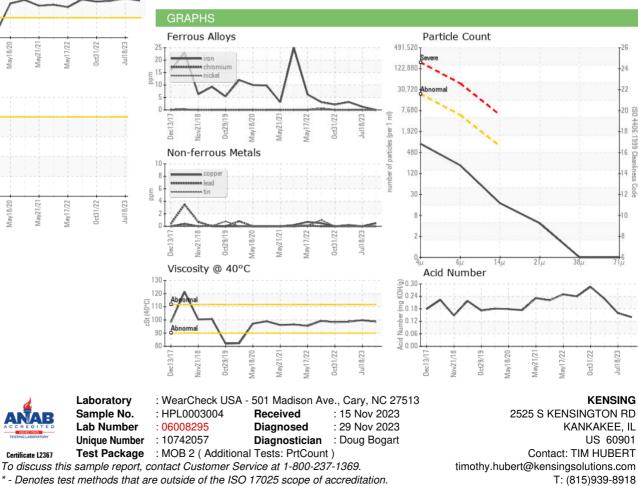

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Aav17/22

May21/21

F: x: