



# PROBLEM SUMMARY

Sample Rating Trend


ISO



Machine Id  
**MLFGPB-1 (S/N 21-211)**  
 Component  
**Hydraulic Power Pack**  
 Fluid  
**MOBIL DTE 25 (275 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

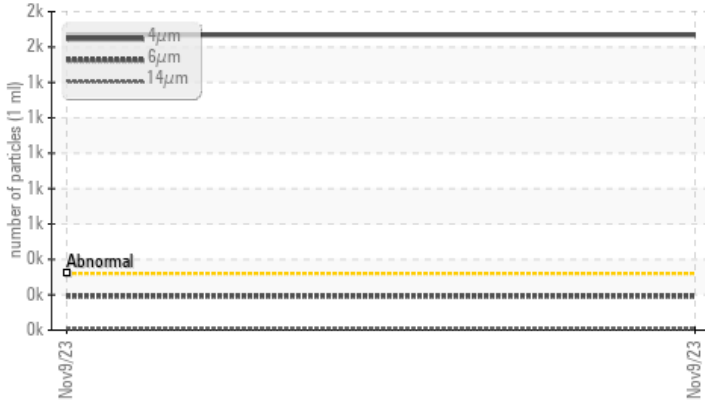

## RECOMMENDATION

No corrective action is recommended at this time.  
 The filtering at the time of sampling has been noted.  
 Resample at the next service interval to monitor.  
 Please note that this is a corrected copy. ( Customer  
 Sample Comment: Viscosity index please )

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | <b>ABNORMAL</b>   | --- | --- |
|-----------------|--------------|-----------|-------------------|-----|-----|
| Particles >4µm  | ASTM D7647   | >320      | ▲ <b>1668</b>     | --- | --- |
| Particles >6µm  | ASTM D7647   | >80       | ▲ <b>192</b>      | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >15/13/10 | ▲ <b>18/15/10</b> | --- | --- |

Customer Id: WESCONSC  
 Sample No.: WC0782775  
 Lab Number: 06008303  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description                                |
|--------|--------|------|---------|--|
| Alert  | ---    | ---  | ?       | Please note that this is a corrected copy. |

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**MLFGPB-1 (S/N 21-211)**

Component  
**Hydraulic Power Pack**

Fluid  
**MOBIL DTE 25 (275 GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. The filtering at the time of sampling has been noted. Resample at the next service interval to monitor. Please note that this is a corrected copy. ( Customer Sample Comment: Viscosity index please )

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0782775</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>09 Nov 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>7200</b>        | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | ---      | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | ---      | ---      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.05      | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m     | <b>0</b>     | ---      | ---      |
| Silver   | ppm    | ASTM D5185m     | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >20 | <b>20</b>    | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m     | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>52</b>    | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>355</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>510</b>   | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>953</b>   | ---      | ---      |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >15 | <b>0</b>     | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>&lt;1</b> | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>&lt;1</b> | ---      | ---      |

## FLUID CLEANLINESS

|                 | method       | limit/base | current           | history1 | history2 |
|-----------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm  | ASTM D7647   | >320       | <b>▲ 1668</b>     | ---      | ---      |
| Particles >6µm  | ASTM D7647   | >80        | <b>▲ 192</b>      | ---      | ---      |
| Particles >14µm | ASTM D7647   | >10        | <b>10</b>         | ---      | ---      |
| Particles >21µm | ASTM D7647   | >3         | <b>2</b>          | ---      | ---      |
| Particles >38µm | ASTM D7647   | >3         | <b>0</b>          | ---      | ---      |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>          | ---      | ---      |
| Oil Cleanliness | ISO 4406 (c) | >15/13/10  | <b>▲ 18/15/10</b> | ---      | ---      |


## FLUID DEGRADATION

|                  | method   | limit/base | current     | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | <b>0.32</b> | ---      | ---      |




# OIL ANALYSIS REPORT


## ▲ Particle Trend

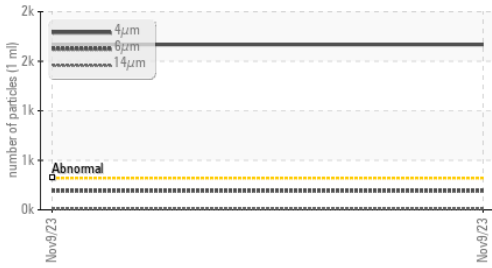


## Viscosity @ 100°C

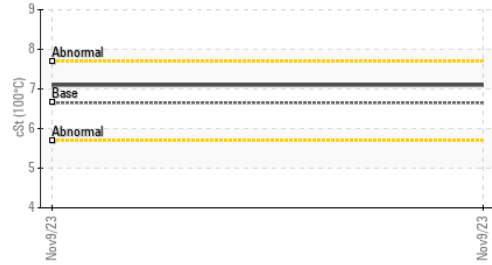


## Acid Number

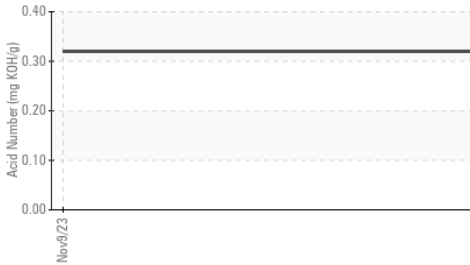

## Viscosity @ 100°C

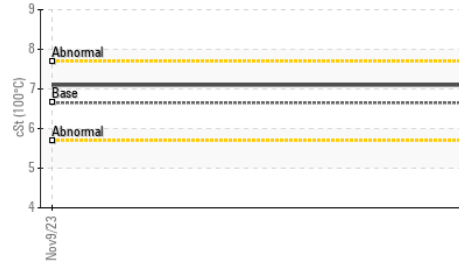

## Viscosity @ 40°C

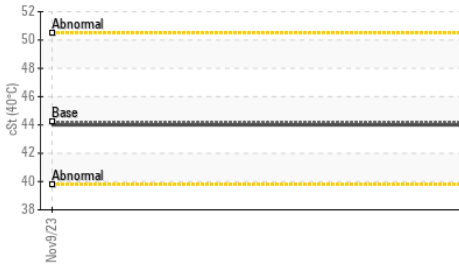

| VISUAL           | method | limit/base | current | history1     | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | ---      |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | ---      |
| Emulsified Water | scalar | *Visual    | >0.05   | <b>NEG</b>   | ---      |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | ---      |

| FLUID PROPERTIES     | method | limit/base | current | history1    | history2 |
|----------------------|--------|------------|---------|-------------|----------|
| Visc @ 40°C          | cSt    | ASTM D445  | 44.2    | <b>44.0</b> | ---      |
| Visc @ 100°C         | cSt    | ASTM D445  | 6.65    | <b>7.1</b>  | ---      |
| Viscosity Index (VI) | Scale  | ASTM D2270 | 98      | <b>121</b>  | ---      |

## SAMPLE IMAGES

| SAMPLE IMAGES | method | limit/base | current | history1        | history2        |
|---------------|--------|------------|---------|-----------------|-----------------|
| Color         |        |            |         | <i>no image</i> | <i>no image</i> |
| Bottom        |        |            |         | <i>no image</i> | <i>no image</i> |

## GRAPHS


### Ferrous Alloys




### Non-ferrous Metals




### Viscosity @ 40°C

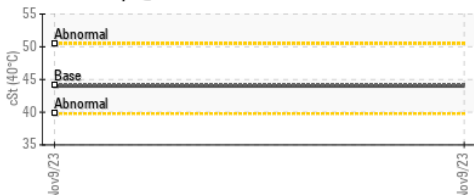

### ▲ Particle Count

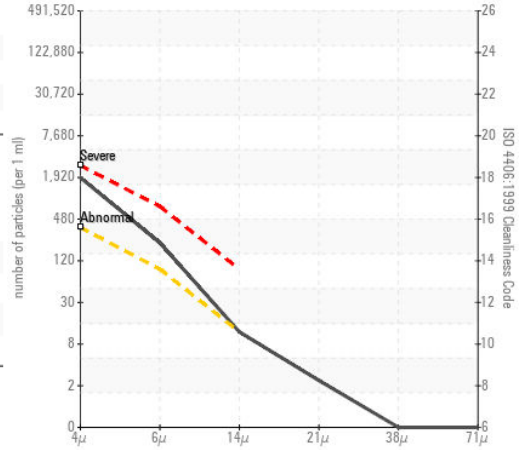

### Acid Number

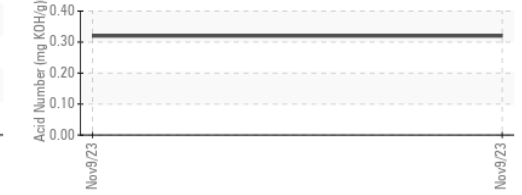

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0782775 **Received** : 15 Nov 2023  
**Lab Number** : 06008303 **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10742065 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

### WEST SIDE SOLUTIONS

4506 HWY 90  
 CONWAY, SC  
 US 29526-9631  
 Contact: KEN ANDRE  
 westsidesolutionsus@gmail.com  
 T: (216)577-5014  
 F: