



PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id
BATGPB-1 (S/N 94-512)
 Component
Hydraulic Power Pack
 Fluid
NOCO NOCOLUBE AW 68 (165 GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

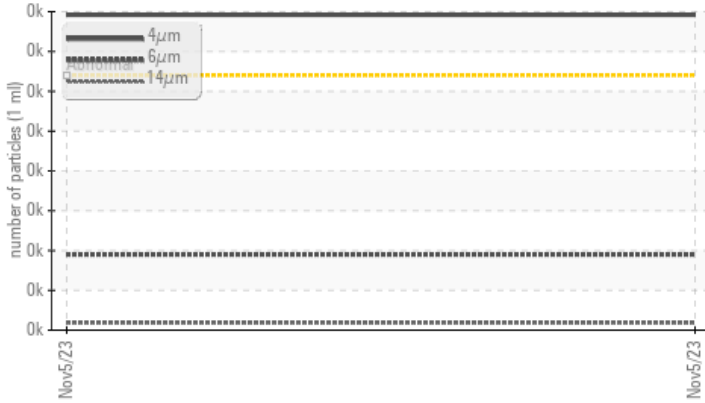

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.
 Please note that this is a corrected copy. (Customer
 Sample Comment: Viscosity Index please)

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	---	---
Particles >4µm	ASTM D7647	>320	▲ 396	---	---
Particles >6µm	ASTM D7647	>80	▲ 95	---	---
Oil Cleanliness	ISO 4406 (c)	>15/13/10	▲ 16/14/10	---	---

Customer Id: WESCONSC
 Sample No.: WC0782767
 Lab Number: 06008306
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	Please note that this is a corrected copy.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
BATGPB-1 (S/N 94-512)
 Component
Hydraulic Power Pack
 Fluid
NOCO NOCOLUBE AW 68 (165 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy. (Customer Sample Comment: Viscosity Index please)

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0782767	---	---
Sample Date	Client Info		05 Nov 2023	---	---
Machine Age	hrs	Client Info	84460	---	---
Oil Age	hrs	Client Info	4793	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	0	---	---
Copper	ppm	ASTM D5185m >20	1	---	---
Tin	ppm	ASTM D5185m >20	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	2	---	---
Calcium	ppm	ASTM D5185m 40	106	---	---
Phosphorus	ppm	ASTM D5185m 250	382	---	---
Zinc	ppm	ASTM D5185m 310	493	---	---
Sulfur	ppm	ASTM D5185m 2540	8088	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	---	---
Sodium	ppm	ASTM D5185m	<1	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>320	▲ 396	---	---
Particles >6µm	ASTM D7647	>80	▲ 95	---	---
Particles >14µm	ASTM D7647	>10	9	---	---
Particles >21µm	ASTM D7647	>3	2	---	---
Particles >38µm	ASTM D7647	>3	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>15/13/10	▲ 16/14/10	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	---	---

OIL ANALYSIS REPORT

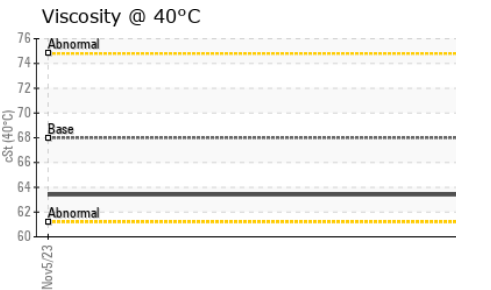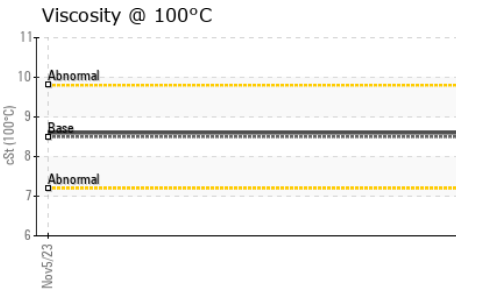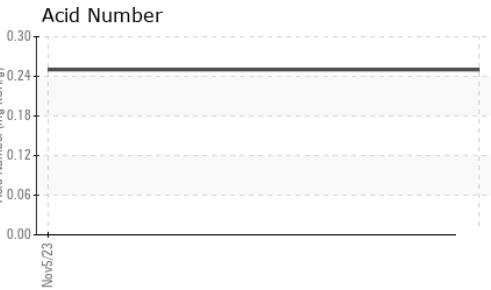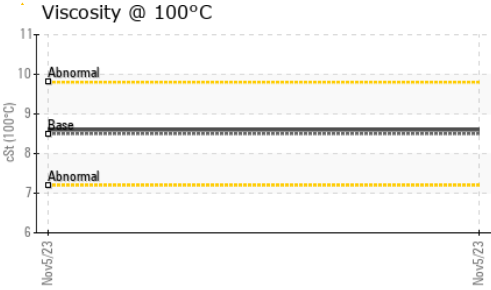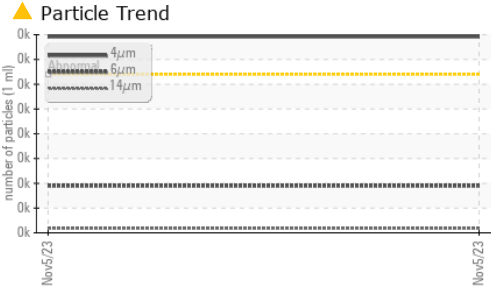





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	68.0	63.4	---	---
Visc @ 100°C	cSt	ASTM D445	8.5	8.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270	107	107	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

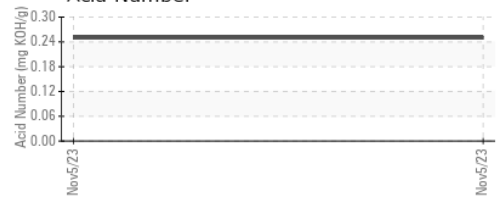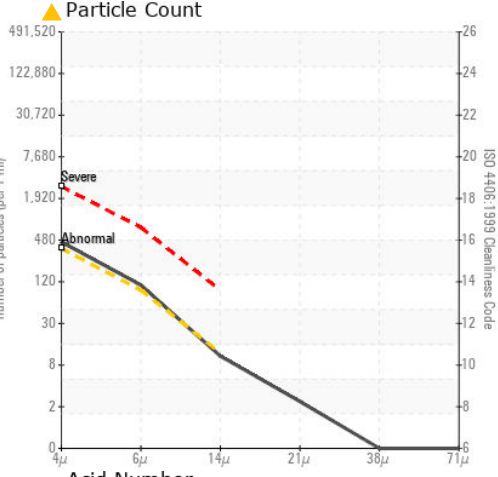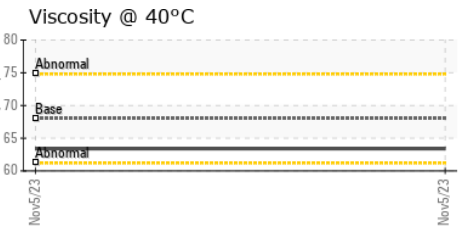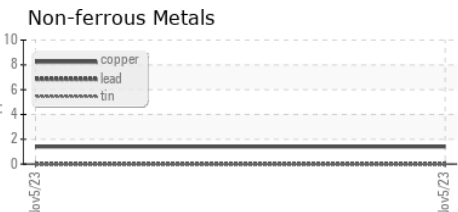

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0782767 **Received** : 15 Nov 2023
Lab Number : 06008306 **Diagnosed** : 22 Nov 2023
Unique Number : 10742068 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KV100, VI)

WEST SIDE SOLUTIONS
 4506 HWY 90
 CONWAY, SC
 US 29526-9631
 Contact: KEN ANDRE
 westsidesolutionsus@gmail.com
 T: (216)577-5014
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)