



# PROBLEM SUMMARY

## Sample Rating Trend




ISO



Machine Id  
**JNSGPB-1 (S/N 21-432)**  
 Component  
**Hydraulic Power Pack**  
 Fluid  
**LUBRIPLATE SFGO ULTRA 46 (165 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

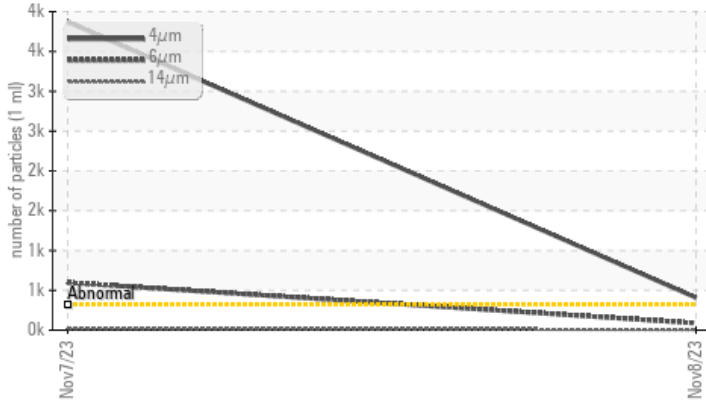

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.  
 Please note that this is a corrected copy. ( Customer  
 Sample Comment: After 5 hours of kidney filtration. )

## PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ABNORMAL	---
Particles >4µm	ASTM D7647	>320	▲ 408	▲ 3871	---
Particles >6µm	ASTM D7647	>80	▲ 88	▲ 596	---
Oil Cleanliness	ISO 4406 (c)	>15/13/10	▲ 16/14/10	▲ 19/16/11	---

Customer Id: WESCONSC  
 Sample No.: WC0782772  
 Lab Number: 06008309  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	Please note that this is a corrected copy.

## HISTORICAL DIAGNOSIS

07 Nov 2023 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Follow-up sample received. Resample at the next service interval to monitor. Please note that this is a corrected copy. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

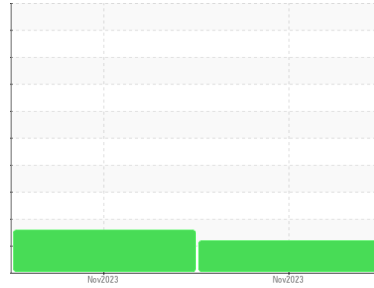

ISO



Machine Id  
**JNSGPB-1 (S/N 21-432)**  
 Component  
**Hydraulic Power Pack**  
 Fluid  
**LUBRIPLATE SFGO ULTRA 46 (165 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy. ( Customer Sample Comment: After 5 hours of kidney filtration. )

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0782772</b>	WC0782771	---
Sample Date	Client Info	<b>08 Nov 2023</b>	07 Nov 2023	---
Machine Age	hrs	<b>0</b>	0	---
Oil Age	hrs	<b>754</b>	752	---
Oil Changed	Client Info	<b>Filtered</b>	Not Changd	---
Sample Status		<b>ATTENTION</b>	ABNORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>2</b>	2	---
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>0</b>	0	---
Silver	ppm ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >20	<b>0</b>	0	---
Lead	ppm ASTM D5185m >20	<b>0</b>	0	---
Copper	ppm ASTM D5185m >20	<b>14</b>	14	---
Tin	ppm ASTM D5185m >20	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	0	---
Barium	ppm ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m	<b>0</b>	0	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Calcium	ppm ASTM D5185m	<b>50</b>	49	---
Phosphorus	ppm ASTM D5185m	<b>1140</b>	1115	---
Zinc	ppm ASTM D5185m	<b>1375</b>	1331	---
Sulfur	ppm ASTM D5185m	<b>3121</b>	3052	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>1</b>	<1	---
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >320	<b>▲ 408</b>	▲ 3871	---
Particles >6µm	ASTM D7647 >80	<b>▲ 88</b>	▲ 596	---
Particles >14µm	ASTM D7647 >10	<b>6</b>	▲ 20	---
Particles >21µm	ASTM D7647 >3	<b>2</b>	3	---
Particles >38µm	ASTM D7647 >3	<b>0</b>	0	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c) >15/13/10	<b>▲ 16/14/10</b>	▲ 19/16/11	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>1.14</b>	1.13	---




# OIL ANALYSIS REPORT


### ▲ Particle Trend

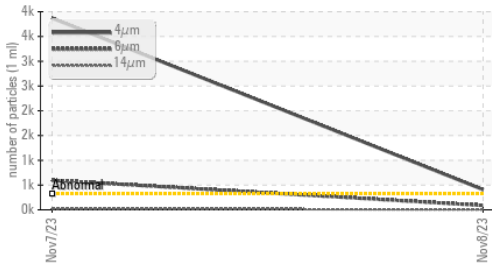


### ▲ Particle Trend

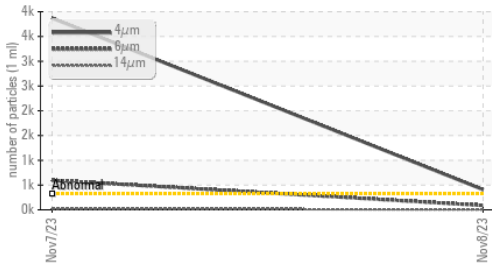

### Acid Number

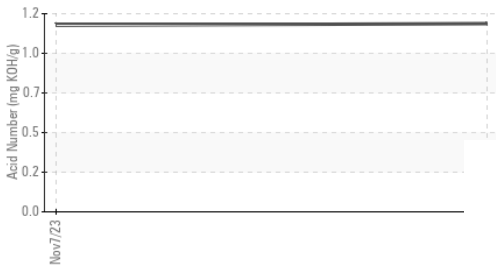


### Viscosity @ 40°C

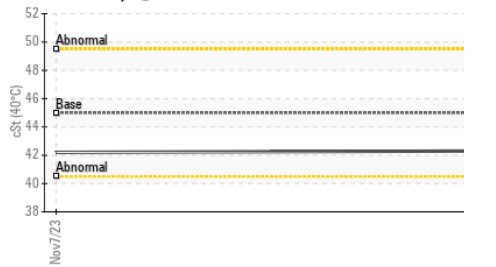





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	42.3	42.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

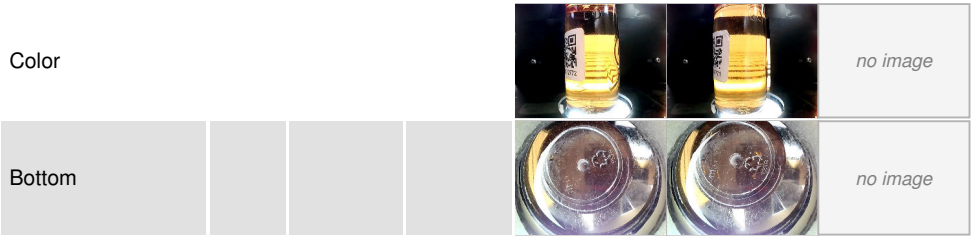

### GRAPHS

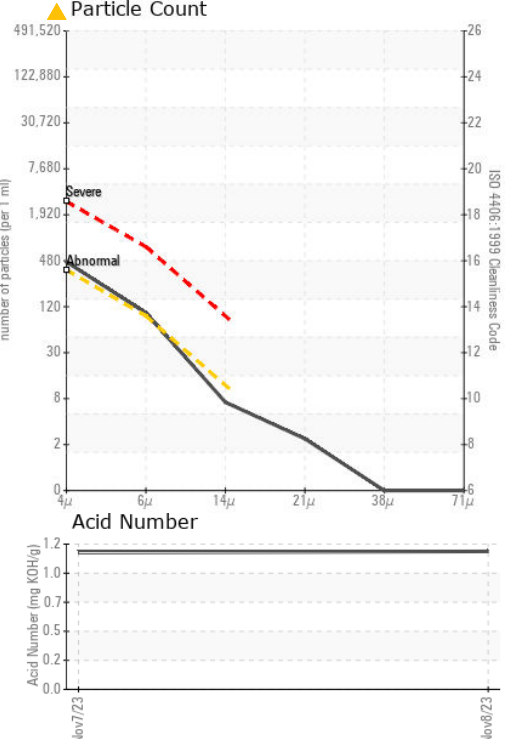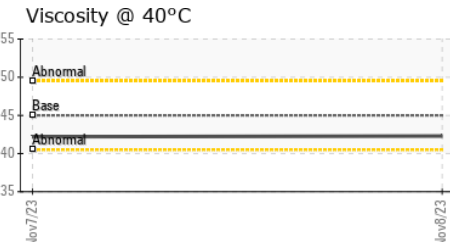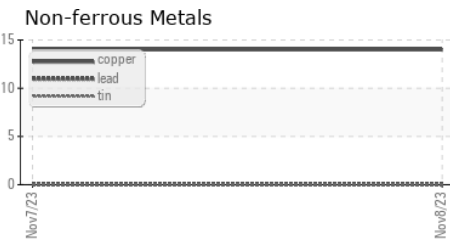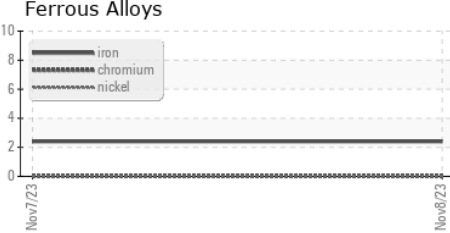

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0782772 **Received** : 15 Nov 2023  
**Lab Number** : 06008309 **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10742071 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**WEST SIDE SOLUTIONS**  
 4506 HWY 90  
 CONWAY, SC  
 US 29526-9631  
 Contact: KEN ANDRE  
 westsidesolutionsus@gmail.com  
 T: (216)577-5014  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)