




# PROBLEM SUMMARY

## Sample Rating Trend

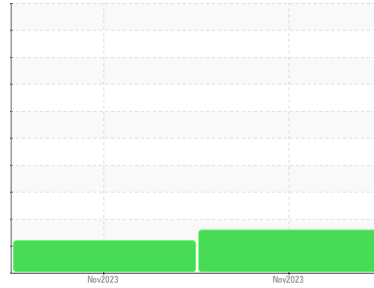


ISO



Machine Id  
**BDFGPB-1 (S/N 14-231)**  
 Component  
**Hydraulic Power Pack**  
 Fluid  
**SHELL TELLUS S2 MX 46 (335 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

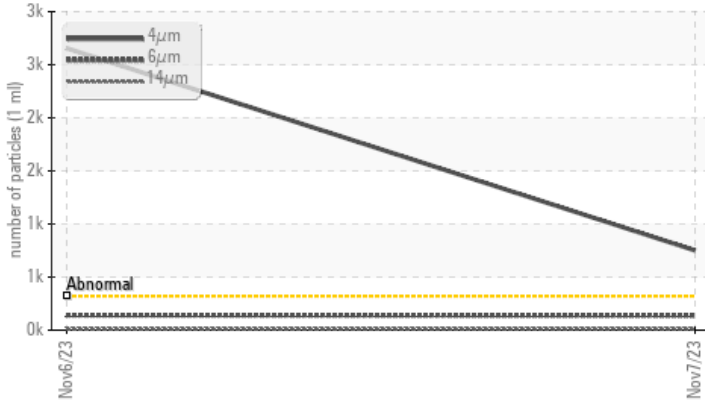

## RECOMMENDATION

No corrective action is recommended at this time. The filtering at the time of sampling has been noted. Resample at the next service interval to monitor. Please note that this is a corrected copy. ( Customer Sample Comment: After 6 hours of kidney filtration. )

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>320	▲ 751	▲ 2656	---
Particles >6µm	ASTM D7647	>80	▲ 138	▲ 141	---
Particles >14µm	ASTM D7647	>10	▲ 12	9	---
Oil Cleanliness	ISO 4406 (c)	>15/13/10	▲ 17/14/11	▲ 19/14/10	---

Customer Id: WESCONSC  
 Sample No.: WC0782770  
 Lab Number: 06008310  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	Please note that this is a corrected copy.

## HISTORICAL DIAGNOSIS

### 06 Nov 2023 Diag: Doug Bogart

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please note that this is a corrected copy. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

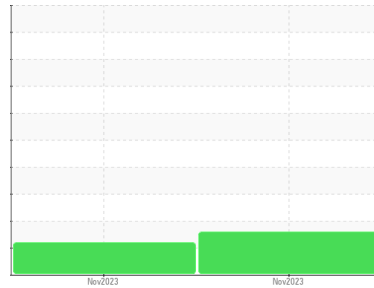

ISO



Machine Id  
**BDFGPB-1 (S/N 14-231)**

Component  
**Hydraulic Power Pack**

Fluid  
**SHELL TELLUS S2 MX 46 (335 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filtering at the time of sampling has been noted. Resample at the next service interval to monitor. Please note that this is a corrected copy. ( Customer Sample Comment: After 6 hours of kidney filtration. )

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0782770</b>	WC0782769	---
Sample Date	Client Info		<b>07 Nov 2023</b>	06 Nov 2023	---
Machine Age	hrs	Client Info	<b>32913</b>	32908	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Filtered</b>	Not Changd	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >20	<b>6</b>	6	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 70	<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185m 10	<b>36</b>	30	---
Phosphorus	ppm	ASTM D5185m 300	<b>311</b>	313	---
Zinc	ppm	ASTM D5185m 325	<b>383</b>	368	---
Sulfur	ppm	ASTM D5185m 665	<b>1068</b>	1041	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>320	<b>▲ 751</b>	▲ 2656	---
Particles >6µm	ASTM D7647	>80	<b>▲ 138</b>	▲ 141	---
Particles >14µm	ASTM D7647	>10	<b>▲ 12</b>	9	---
Particles >21µm	ASTM D7647	>3	<b>2</b>	2	---
Particles >38µm	ASTM D7647	>3	<b>1</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>15/13/10	<b>▲ 17/14/11</b>	▲ 19/14/10	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.35	<b>0.32</b>	0.33	---




# OIL ANALYSIS REPORT


## Particle Trend

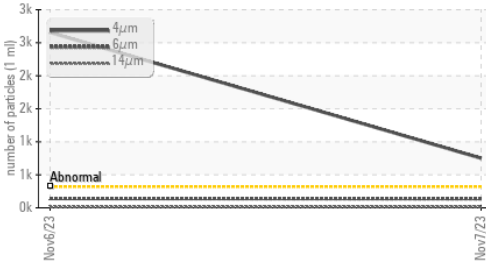


## Particle Trend

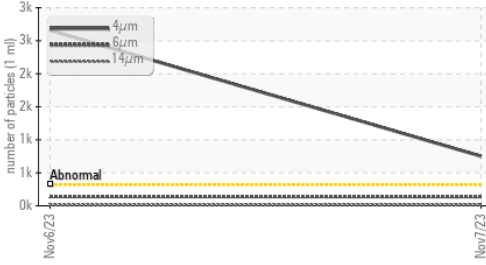

## Acid Number

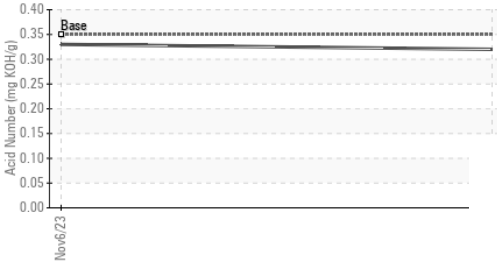

## Viscosity @ 40°C

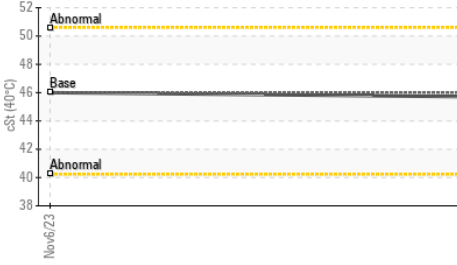

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	45.7	46.0

## SAMPLE IMAGES


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

## GRAPHS

### Ferrous Alloys




### Non-ferrous Metals

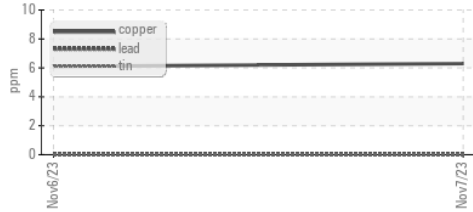

### Viscosity @ 40°C



### Particle Count

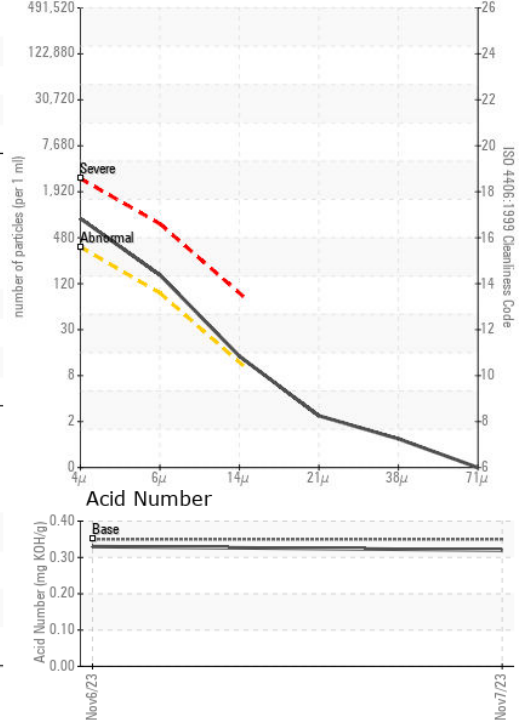

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0782770 Received : 15 Nov 2023  
 Lab Number : 06008310 Diagnosed : 22 Nov 2023  
 Unique Number : 10742072 Diagnostician : Doug Bogart  
 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

### WEST SIDE SOLUTIONS

4506 HWY 90  
 CONWAY, SC  
 US 29526-9631  
 Contact: KEN ANDRE  
 westsidesolutionsus@gmail.com  
 T: (216)577-5014  
 F: