

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 6521427 (S/N 1063)

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Dec202	0 Nov2021	Sep2022 0	t2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000566	KCP31278	KCP37611
Sample Date		Client Info		20 Oct 2023	26 Sep 2022	03 Nov 2021
Machine Age	hrs	Client Info		15630	12635	9365
Oil Age	hrs	Client Info		0	3000	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
		ASTM D5185m		13	11	16
Copper Tin	ppm	ASTM D5185m	>50 >10	-	0	<1
	ppm		>10	0		<1
Antimony	ppm	ASTM D5185m ASTM D5185m				
Vanadium	ppm			<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	8
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	<1	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	<1	4	<1
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	20792	15017	19516
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	<1	<1	<1
Sodium	ppm	ASTM D5185m	>20	<1	0	0
Potassium		ASTM D5185m	>20	<1	0	0
	ppm					
Water ppm Water	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	0.002 23.7	0.012	0.004 42.5
FLUID CLEANLIN		method	limit/base		history1	history2
Particles >4µm		ASTM D7647		2821	3879	847
Particles >6µm		ASTM D7647	>1300	366	▲ 1463	267
Particles >14µm		ASTM D7647	>80	17	▲ 195	25
Particles >21µm		ASTM D7647		7	▲ 36	4
		ASTM D7647 ASTM D7647		1	2	0
Particles >38µm				1	2	0
Particles >71µm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>3 >/17/13	1 19/16/11	0	0
	TION	()				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.47	0.52	0.409
:25:02) Rev: 1	Contact/Location: Service Manager - LUCGRA					


Report Id: LUCGRA [WUSCAR] 06008318 (Generated: 11/17/2023 11:25:02) Rev: 1


Contact/Location: Service Manager - LUCGRA



OIL ANALYSIS REPORT

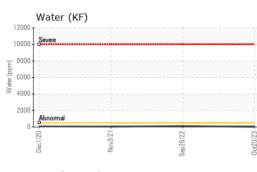


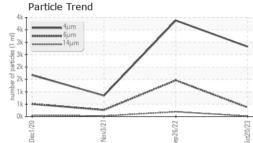

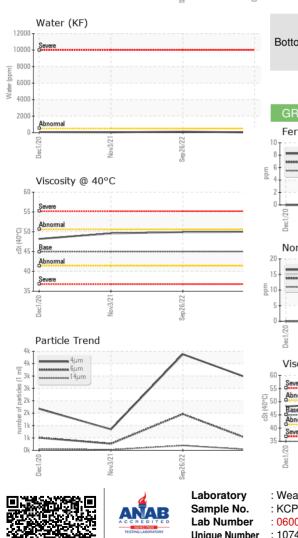


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	50.0	49.9	49.6
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

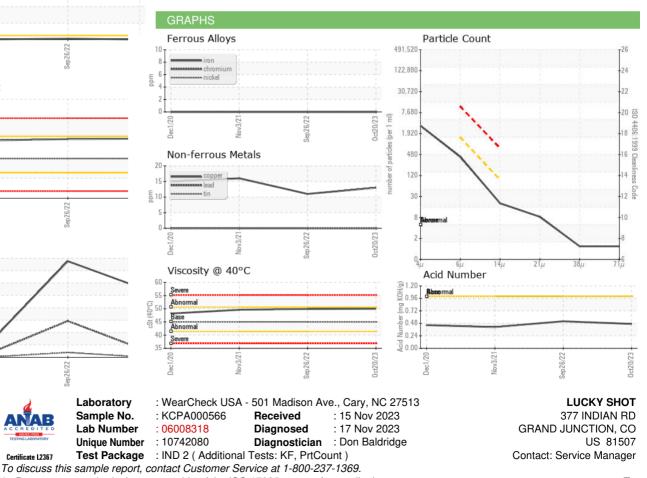

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - LUCGRA