




PROBLEM SUMMARY

Sample Rating Trend

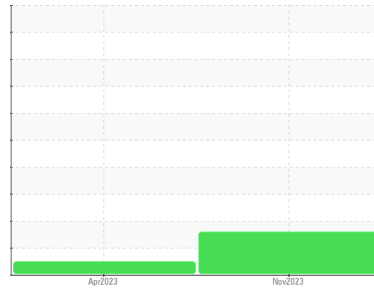

ISO




Machine Id
KAESER SK 15 8081501 (S/N 1831)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

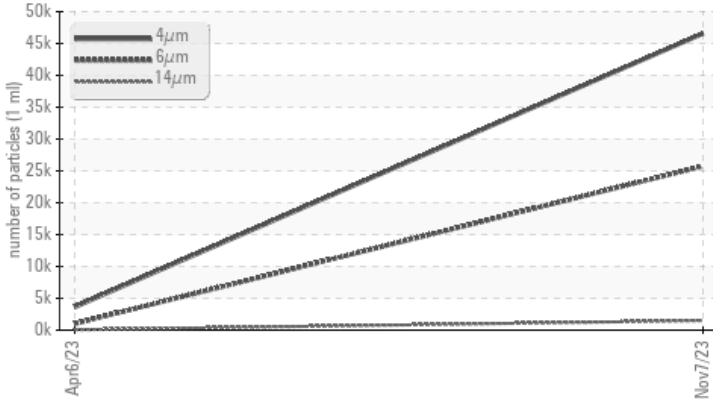

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	---
Particles >6µm	ASTM D7647	>1300	▲ 25757	1012	---
Particles >14µm	ASTM D7647	>80	▲ 1502	50	---
Particles >21µm	ASTM D7647	>20	▲ 78	7	---
Oil Cleanliness	ISO 4406 (c)	>17/13	▲ 22/18	17/13	---

Customer Id: STILON
 Sample No.: KCPA006860
 Lab Number: 06008325
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

06 Apr 2023 Diag: Angela Borella

NORMAL




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

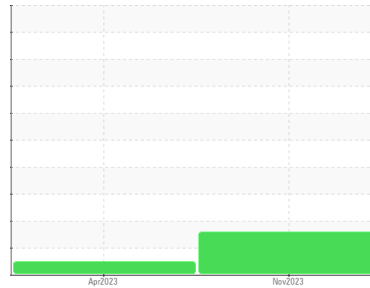

ISO



Machine Id
KAESER SK 15 8081501 (S/N 1831)

Component

Compressor

Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ **Recommendation**

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ **Contamination**

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		KCPA006860	KCP53575	---
Sample Date	Client Info		07 Nov 2023	06 Apr 2023	---
Machine Age	hrs	Client Info	5182	2176	---
Oil Age	hrs	Client Info	0	2176	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	NORMAL	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>50	0	<1	---
Chromium	ppm	ASTM D5185m	>10	0	<1	---
Nickel	ppm	ASTM D5185m	>3	0	<1	---
Titanium	ppm	ASTM D5185m	>3	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>50	6	0	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	1	---
Cadmium	ppm	ASTM D5185m		0	<1	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	0	0	0	---
Barium	ppm	ASTM D5185m	90	4	0	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	100	43	<1	---
Calcium	ppm	ASTM D5185m	0	0	2	---
Phosphorus	ppm	ASTM D5185m	0	1	0	---
Zinc	ppm	ASTM D5185m	0	7	0	---
Sulfur	ppm	ASTM D5185m	23500	18716	22	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	<1	1	---
Sodium	ppm	ASTM D5185m		10	37	---
Potassium	ppm	ASTM D5185m	>20	<1	7	---
Water	%	ASTM D6304	>0.05	0.006	0.012	---
ppm Water	ppm	ASTM D6304	>500	64.1	121.9	---






FLUID CLEANLINESS method limit/base current history1 history2

Particles >4µm	ASTM D7647			46573	3616	---
Particles >6µm	ASTM D7647	>1300		▲ 25757	1012	---
Particles >14µm	ASTM D7647	>80		▲ 1502	50	---
Particles >21µm	ASTM D7647	>20		▲ 78	7	---
Particles >38µm	ASTM D7647	>4		0	0	---
Particles >71µm	ASTM D7647	>3		0	0	---
Oil Cleanliness	ISO 4406 (c)	>17/13		▲ 22/18	17/13	---

FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.32	0.35	---
------------------	----------	------------	-----	-------------	------	-----


OIL ANALYSIS REPORT

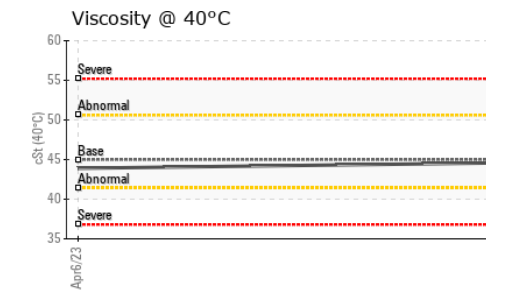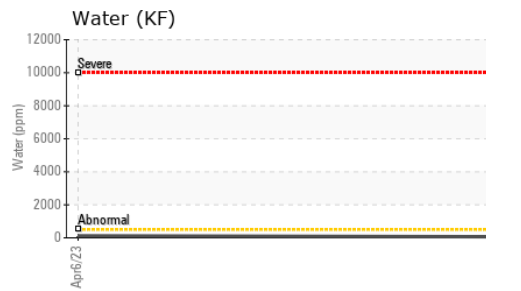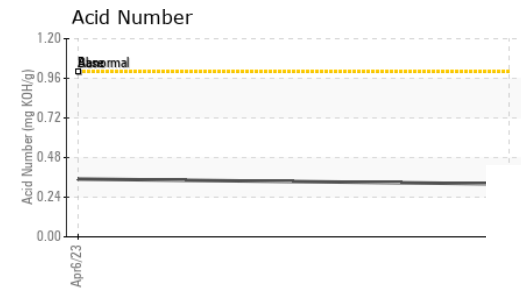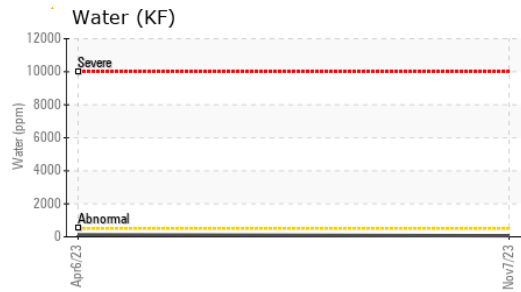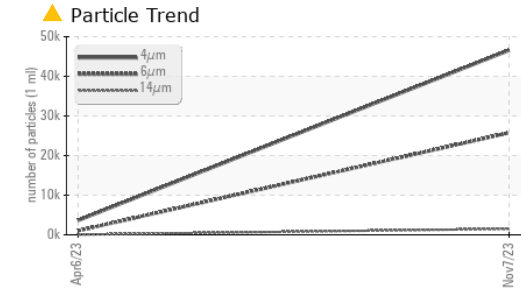





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.6	43.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

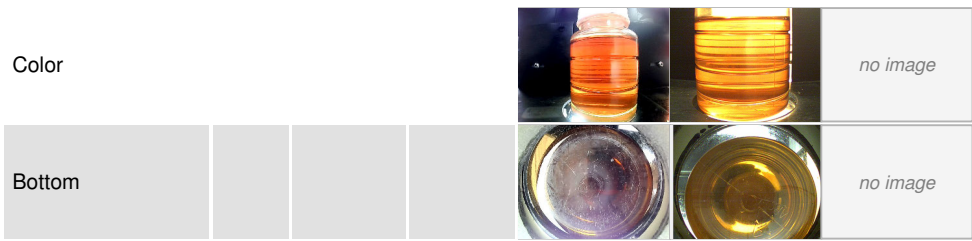

GRAPHS

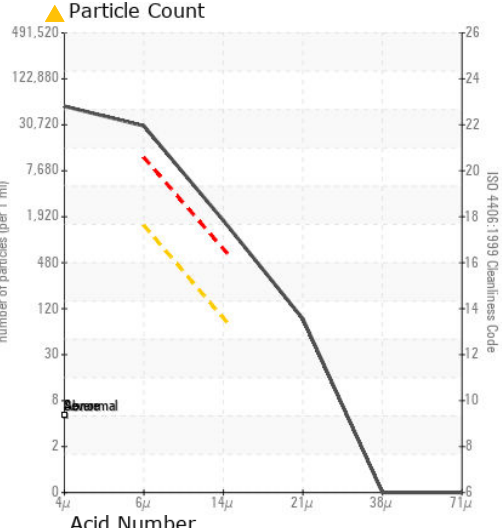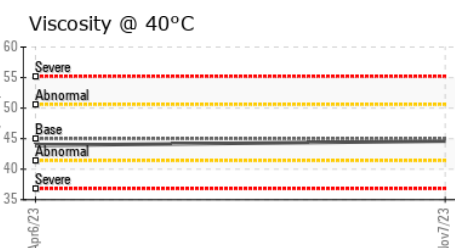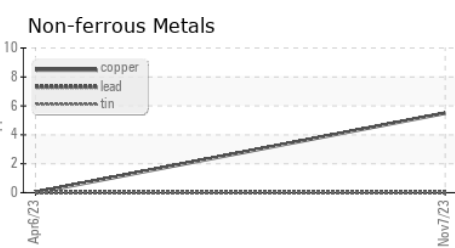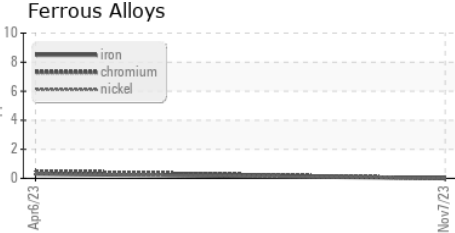

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA006860 **Received** : 15 Nov 2023
Lab Number : 06008325 **Diagnosed** : 17 Nov 2023
Unique Number : 10742087 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

STICKER GIANT
 880 WEAVER PARK RD
 LONGMONT, CO
 US 80501
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: