


# **PROBLEM SUMMARY**

# FES TYSMAD17FES (S/N X3025)

Refrigeration Compressor Fluid USPI 1009-68 SC (--- GAL)

# COMPONENT CONDITION SUMMARY

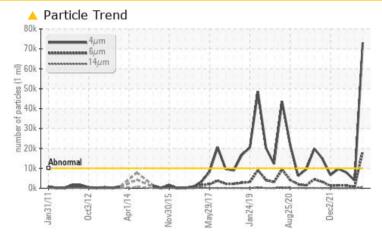

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TE	EST RESULTS				
Sample Status			ABNORMAL	NORMAL	NORMAL
Particles >4µm	ASTM D7647	>10000	<b>A</b> 73106	3825	7814
Particles >6µm	ASTM D7647	>2500	🔺 18513	696	1393
Particles >14µm	ASTM D7647	>320	<u> </u>	13	24
Particles >21µm	ASTM D7647	>80	<u> </u>	2	4
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>A</b> 23/21/16	19/17/11	20/18/12


Customer Id: TYSMAD Sample No.: USP0003688 Lab Number: 06008361 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

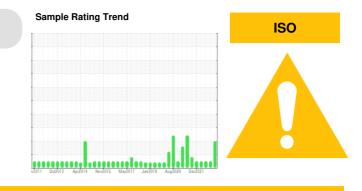

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		

### HISTORICAL DIAGNOSIS

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

### 20 Feb 2023 Diag: Doug Bogart

31 Jul 2023 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







# **OIL ANALYSIS REPORT**

Sample Rating Trend

### Machine Id FES TYSMAD17FES (S/N X3025) Component

**Refrigeration Compressor** Fluid

USPI 1009-68 SC (--- GAL)

## DIAGNOSIS

### A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

# Wear


All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

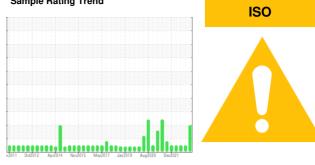


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003688	USP0000843	USP246296
Sample Date		Client Info		14 Nov 2023	31 Jul 2023	20 Feb 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	<1	<1
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	<1	0
Sulfur	ppm	ASTM D5185m	50	18	17	2
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	5	3
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium			00		-	
	DDIII	ASIMUSIASM	>20	<1	<1	0
	ppm %	ASTM D5185m	>20	<1 0.001	<1 0.003	0.004
Water	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304	>0.01	<1 0.001 12.3	<1 0.003 30.7	0 0.004 40.5
Water	% ppm	ASTM D6304	>0.01	0.001	0.003	0.004 40.5
Water ppm Water	% ppm	ASTM D6304 ASTM D6304	>0.01 >100	0.001 12.3	0.003 30.7	0.004 40.5
Water ppm Water FLUID CLEANLIN	% ppm	ASTM D6304 ASTM D6304 method	>0.01 >100 limit/base	0.001 12.3 current	0.003 30.7 history1	0.004 40.5 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647	>0.01 >100 limit/base >10000	0.001 12.3 current 73106	0.003 30.7 history1 3825	0.004 40.5 history2 7814
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.01 >100 limit/base >10000 >2500	0.001 12.3	0.003 30.7 history1 3825 696	0.004 40.5 history2 7814 1393
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.01 >100 limit/base >10000 >2500 >320	0.001 12.3 <u>current</u> ▲ 73106 ▲ 18513	0.003 30.7 history1 3825 696 13	0.004 40.5 history2 7814 1393 24
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.01 >100 limit/base >10000 >2500 >320 >80 >20	0.001 12.3 <urrent ▲ 73106 ▲ 18513 ▲ 639 ▲ 106</urrent 	0.003 30.7 history1 3825 696 13 2	0.004 40.5 history2 7814 1393 24 4
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.01 >100 limit/base >10000 >2500 >320 >80 >20	0.001 12.3 <urrent ▲ 73106 ▲ 18513 ▲ 639 ▲ 106 3</urrent 	0.003 30.7 history1 3825 696 13 2 0	0.004 40.5 history2 7814 1393 24 4 0
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	% ppm ESS	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.01 >100 limit/base >10000 >2500 >320 >320 >80 >20 >4	0.001 12.3 current ▲ 73106 ▲ 18513 ▲ 639 ▲ 106 3 0	0.003 30.7 history1 3825 696 13 2 0 0 0	0.004 40.5 history2 7814 1393 24 4 0 0


Report Id: TYSMAD [WUSCAR] 06008361 (Generated: 11/17/2023 15:47:28) Rev: 1


Contact/Location: RICK DUVAL - TYSMAD




# **OIL ANALYSIS REPORT**

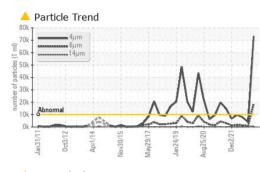

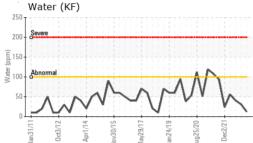

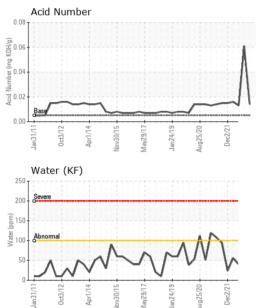




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	66.5	67.5	67.4
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				STRA A DAMA		HH3 EFFES RE28077 DALD

Bottom



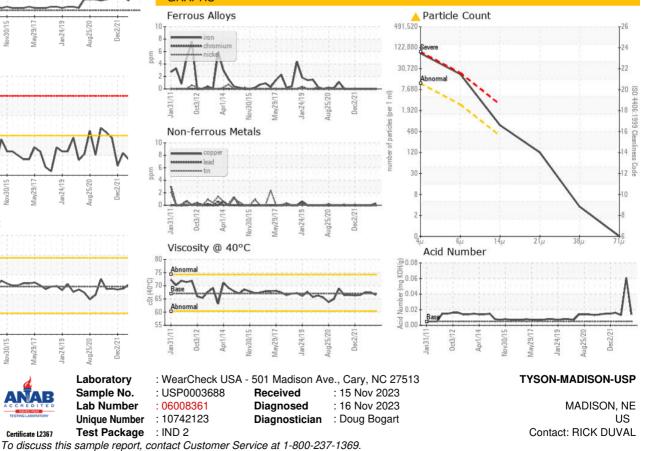

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Laboratory

Sample No.

Lab Number

**Unique Number** 

Contact/Location: RICK DUVAL - TYSMAD

T: (402)423-6375

F: (402)423-6661