


Machine Id MRC-319 Component Compressor Fluid NOT GIVEN (--- GAL)

### COMPONENT CONDITION SUMMARY

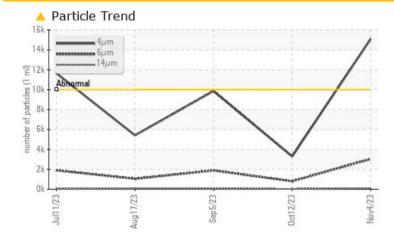

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION	NORMAL	NORMAL		
Particles >4µm	ASTM D7647	>10000	<u> </u>	3301	9859		
Particles >6µm	ASTM D7647	>2500	<u> </u>	801	1888		
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>	19/17/12	20/18/13		

Customer Id: EOGMID Sample No.: TO60001733 Lab Number: 06008410 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### **HISTORICAL DIAGNOSIS**

### 12 Oct 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

### 05 Sep 2023 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





### 17 Aug 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






## **OIL ANALYSIS REPORT**

SAMPLE INFORMATION method

Sample Rating Trend

limit/base

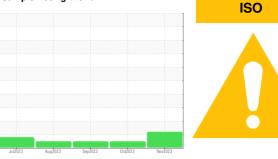

current

history1

history2

MRC-319 Component Compressor Fluid NOT GIVEN (--- GAL)

### DIAGNOSIS

Machine Id

### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMELE INFORM	ATION	methou	IIIIIVDase	current	Thistory I	This tory 2
Sample Number		Client Info		TO60001733	TO60001652	TO60001427
Sample Date		Client Info		04 Nov 2023	12 Oct 2023	05 Sep 2023
Machine Age	hrs	Client Info		3259	2259	1787
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	0	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<1	<1	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		97	66	118
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		8	11	15
Calcium	ppm	ASTM D5185m		1280	1269	1356
Phosphorus	ppm	ASTM D5185m		318	312	286
Zinc	ppm	ASTM D5185m		336	336	307
Sulfur	ppm	ASTM D5185m		2696	2159	1391
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	2	2
Sodium	ppm	ASTM D5185m		4	2	2
Potassium	ppm	ASTM D5185m	>20	1	3	1
Water	%	ASTM D6304	>0.1	0.017	0.009	0.034
ppm Water	ppm	ASTM D6304	>1000	174.1	92.1	342.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>	3301	9859
Particles >6µm		ASTM D7647		<u> </u>	801	1888
Particles >14µm		ASTM D7647	>320	106	35	50
Particles >21µm		ASTM D7647		11	9	9
Particles >38µm		ASTM D7647	>20	0	1	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>A</b> 21/19/14	19/17/12	20/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.68	0.76	0.75



# **OIL ANALYSIS REPORT**

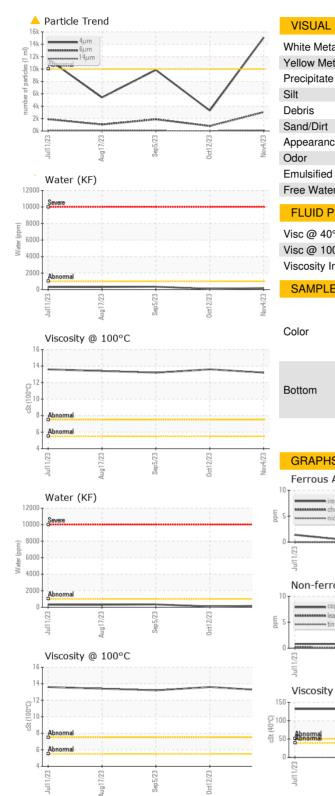

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		128	133	130
Visc @ 100°C	cSt	ASTM D445		13.2	13.6	13.2
Viscosity Index (VI)	Scale	ASTM D2270		96	97	94
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						

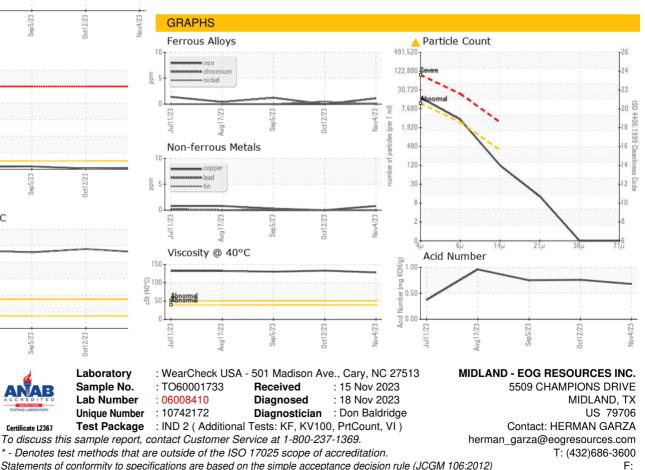

Certificate L2367

Ĕ

Page 4 of 4