


PROBLEM SUMMARY


Area
GOLDEN BEAR LGL
 Machine Id
MRC-284
 Component
Compressor
 Fluid
TULCO LUBSOIL GEO XL LOW ASH 40 (--- GAL)

Sample Rating Trend

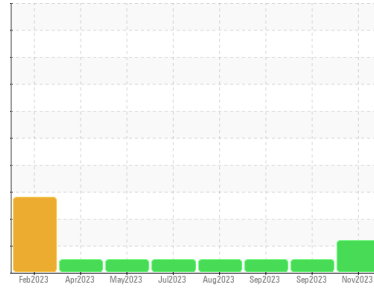

COMPONENT CONDITION SUMMARY

▲ Particle Trend

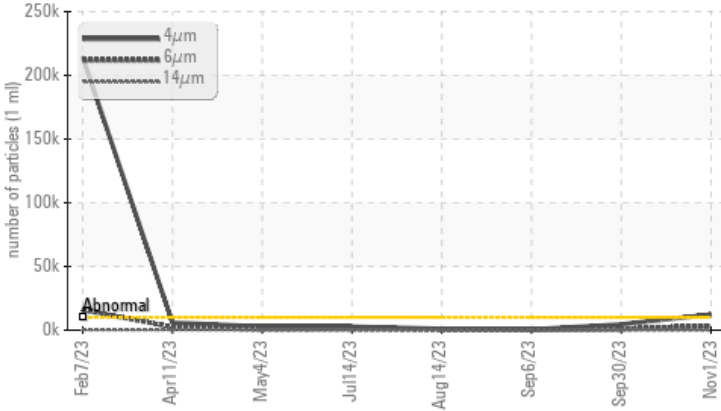

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	NORMAL	NORMAL
Particles >4µm	ASTM D7647	>10000	▲ 12360	4527	589
Particles >6µm	ASTM D7647	>2500	▲ 3616	787	146
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 21/19/14	19/17/12	16/14/11

Customer Id: EOGMID
 Sample No.: TO60001637
 Lab Number: 06008415
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

30 Sep 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Sep 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



14 Aug 2023 Diag: Don Baldrige

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
GOLDEN BEAR LGL
Machine Id
MRC-284

Component
Compressor
Fluid
TULCO LUBSOIL GEO XL LOW ASH 40 (--- GAL)

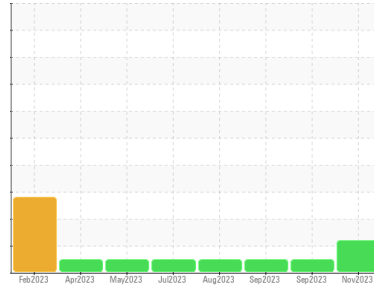

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO60001637	TO60001459	TO60001461
Sample Date	Client Info	01 Nov 2023	30 Sep 2023	06 Sep 2023
Machine Age	hrs	Client Info	12585	12017
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ATTENTION	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	<1
Chromium	ppm	ASTM D5185m >10	0	0
Nickel	ppm	ASTM D5185m	<1	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	<1	0
Aluminum	ppm	ASTM D5185m >25	<1	0
Lead	ppm	ASTM D5185m >25	0	<1
Copper	ppm	ASTM D5185m >50	<1	0
Tin	ppm	ASTM D5185m >15	0	<1
Vanadium	ppm	ASTM D5185m	<1	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 100	104	86	100
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m 1	<1	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 10	9	14	13
Calcium	ppm	ASTM D5185m 1150	1279	1308	1263
Phosphorus	ppm	ASTM D5185m 290	303	281	281
Zinc	ppm	ASTM D5185m 272	333	350	300
Sulfur	ppm	ASTM D5185m 1900	1934	1612	1637

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	2	3	1
Sodium	ppm	ASTM D5185m	2	2	3
Potassium	ppm	ASTM D5185m >20	1	2	1
Water	%	ASTM D6304 >0.1	0.020	0.011	0.036
ppm Water	ppm	ASTM D6304 >1000	206.6	112.7	369.6






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 12360	4527	589
Particles >6µm	ASTM D7647 >2500	▲ 3616	787	146
Particles >14µm	ASTM D7647 >320	108	22	15
Particles >21µm	ASTM D7647 >80	13	5	5
Particles >38µm	ASTM D7647 >20	0	0	1
Particles >71µm	ASTM D7647 >4	0	0	1
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ 21/19/14	19/17/12	16/14/11

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.03	1.074	0.60


OIL ANALYSIS REPORT

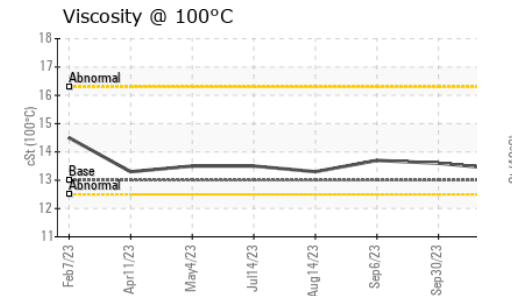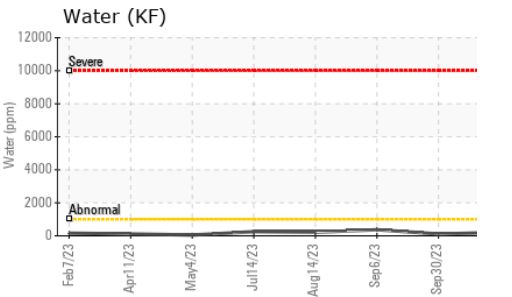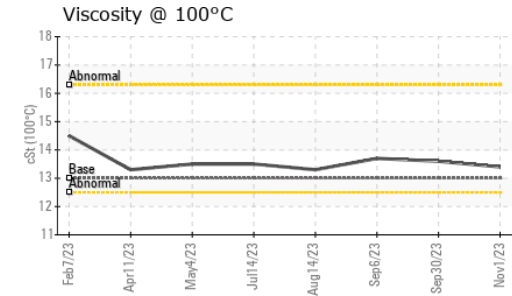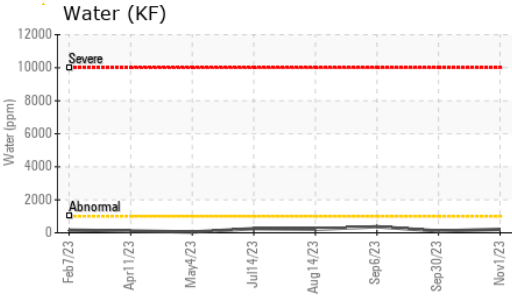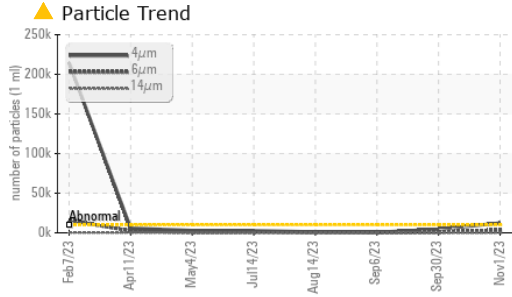



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	122	135	135
Visc @ 100°C	cSt	ASTM D445	13	13.6	13.7
Viscosity Index (VI)	Scale	ASTM D2270	103	95	96

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

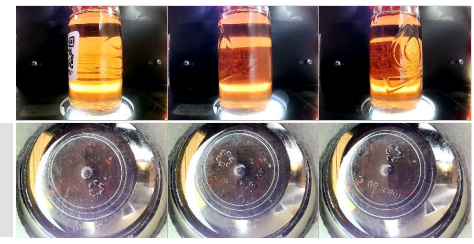

GRAPHS

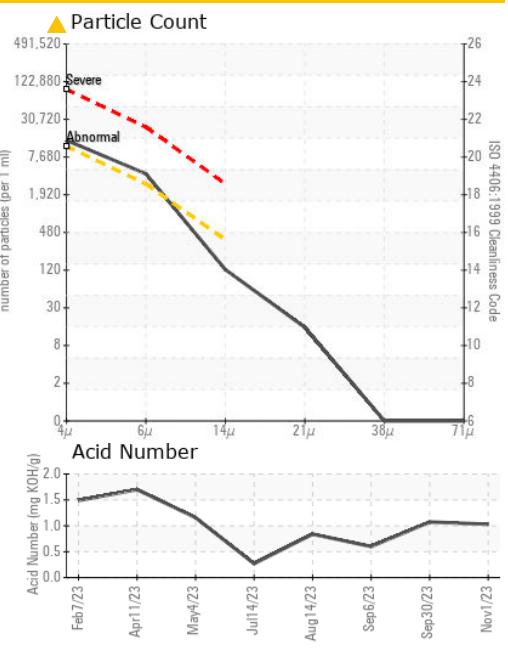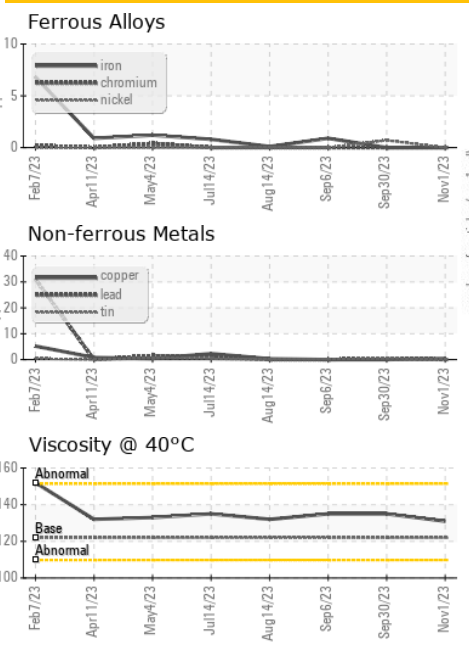

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO60001637 **Received** : 15 Nov 2023
Lab Number : 06008415 **Diagnosed** : 18 Nov 2023
Unique Number : 10742177 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

MIDLAND - EOG RESOURCES INC.
 5509 CHAMPIONS DRIVE
 MIDLAND, TX
 US 79706
 Contact: HERMAN GARZA
 herman_garza@eogresources.com
 T: (432)686-3600
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)