

## **OIL ANALYSIS REPORT**

#### Area NOT GIVEN [1397790] Machine Id INGERSOLL RAND J8640U93034 - SUPERIOR WOOD PRODUCTS Component

Compressor

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend




NORMAL

| SAMPLE INFORM            | IATION   | method      | limit/base | current     | history1    | history2 |
|--------------------------|----------|-------------|------------|-------------|-------------|----------|
| Sample Number            |          | Client Info |            | UCH06008449 | UCH05705135 |          |
| Sample Date              |          | Client Info |            | 08 Oct 2023 | 17 Nov 2022 |          |
| Machine Age              | hrs      | Client Info |            | 553         | 17787       |          |
| Oil Age                  | hrs      | Client Info |            | 0           | 1482        |          |
| Oil Changed              |          | Client Info |            | Not Changd  | Not Changd  |          |
| Sample Status            |          |             |            | NORMAL      | NORMAL      |          |
| WEAR METALS              |          | method      | limit/base | current     | history1    | history2 |
| Iron                     | ppm      | ASTM D5185m | >50        | 0           | 0           |          |
| Chromium                 | ppm      | ASTM D5185m | >10        | 0           | 0           |          |
| Nickel                   | ppm      | ASTM D5185m | 7.0        | 0           | 0           |          |
| Titanium                 | ppm      | ASTM D5185m |            | 0           | 0           |          |
| Silver                   | ppm      | ASTM D5185m |            | 0           | 0           |          |
| Aluminum                 | ppm      | ASTM D5185m | >25        | 0           | 0           |          |
| Lead                     | ppm      | ASTM D5185m | >25        | 0           | 0           |          |
| Copper                   | ppm      | ASTM D5185m | >50        | <1          | 0           |          |
| Tin                      | ppm      | ASTM D5185m | >15        | 0           | 0           |          |
| Vanadium                 | ppm      | ASTM D5185m | 210        | 0           | 0           |          |
| Cadmium                  | ppm      | ASTM D5185m |            | 0           | 0           |          |
| ADDITIVES                |          | method      | limit/base | current     | history1    | history2 |
| Boron                    | ppm      | ASTM D5185m | 1.5        | 0           | 0           |          |
| Barium                   | ppm      | ASTM D5185m | 0          | 0           | 0           |          |
| Molybdenum               | ppm      | ASTM D5185m | 0          | 0           | 0           |          |
| Manganese                | ppm      | ASTM D5185m | 0.3        | 0           | 0           |          |
| Magnesium                | ppm      | ASTM D5185m | 0          | <1          | 0           |          |
| Calcium                  | ppm      | ASTM D5185m | 0          | 0           | 0           |          |
| Phosphorus               | ppm      | ASTM D5185m | 406        | 106         | 181         |          |
| Zinc                     | ppm      | ASTM D5185m | 0          | 0           | 22          |          |
| Sulfur                   | ppm      | ASTM D5185m | 1283       | 832         | 1117        |          |
| CONTAMINANTS             |          | method      | limit/base | current     | history1    | history2 |
| Silicon                  | ppm      | ASTM D5185m | >25        | <1          | <1          |          |
| Sodium                   | ppm      | ASTM D5185m | 220        | 2           | 0           |          |
| Potassium                | ppm      | ASTM D5185m | >20        | 0           | 0           |          |
| FLUID DEGRADA            |          | method      | limit/base | current     | history1    | history2 |
| Acid Number (AN)         | mg KOH/g | ASTM D8045  | 0.463      | 0.09        | 0.078       |          |
| VISUAL                   |          | method      | limit/base | current     | history1    | history2 |
| White Metal              | scalar   | *Visual     | NONE       | NONE        | NONE        |          |
| Yellow Metal             | scalar   | *Visual     | NONE       | NONE        | NONE        |          |
| Precipitate              | scalar   | *Visual     | NONE       | NONE        | NONE        |          |
| Silt                     | scalar   | *Visual     | NONE       | NONE        | NONE        |          |
| Debris                   | scalar   | *Visual     | NONE       | LIGHT       | LIGHT       |          |
| Sand/Dirt                |          | *Visual     | NONE       | NONE        | NONE        |          |
|                          | scalar   |             | NORML      | NORML       | NORML       |          |
| Appearance               | scalar   | *Visual     |            |             |             |          |
| Odor<br>Emulsified Water | scalar   | *Visual     | NORML      | NORML       | NORML       |          |
|                          | scalar   | *Visual     | >0.1       | NEG         | NEG         |          |
| Free Water               | scalar   | *Visual     |            | NEG         | NEG         |          |



# **OIL ANALYSIS REPORT**

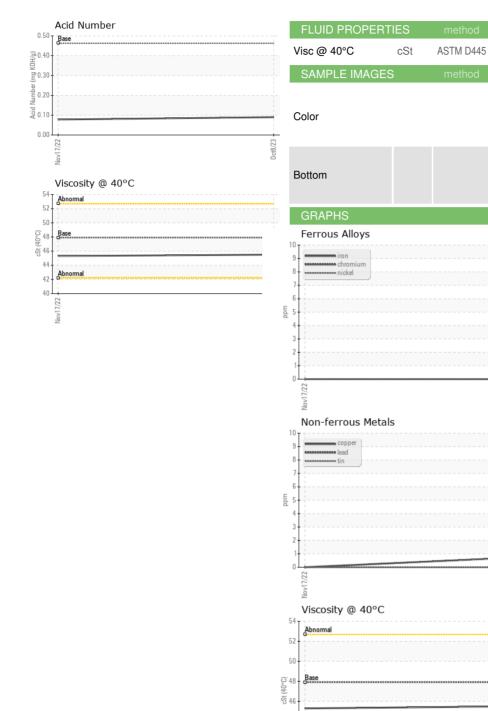



47.9

45.5

45.3

Certificate L2367

Contact/Location: GLEN PARKER - UCAIRIND