




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

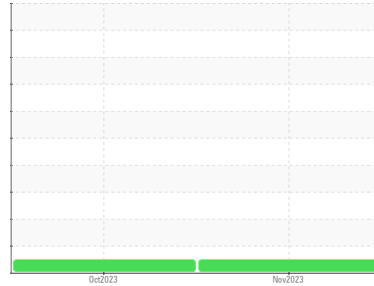

Area  
**MIXING**  
 Machine Id  
**[MIXING] GEAR\_004 MIXER 3B GEARBOX**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL MOBILGEAR 600 XP 320 (530 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0849601</b>	WC0849587	---
Sample Date	Client Info		<b>07 Nov 2023</b>	04 Oct 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>22</b>	14	---
Iron	ppm	ASTM D5185m >200	<b>6</b>	6	---
Chromium	ppm	ASTM D5185m >15	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	0	---
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >200	<b>2</b>	2	---
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>24</b>	26	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m	<b>4</b>	4	---
Phosphorus	ppm	ASTM D5185m	<b>260</b>	329	---
Zinc	ppm	ASTM D5185m	<b>0</b>	0	---
Sulfur	ppm	ASTM D5185m	<b>15132</b>	16150	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>&lt;1</b>	1	---
Sodium	ppm	ASTM D5185m	<b>3</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	---
Water	%	ASTM D6304 >0.2	<b>NEG</b>	NEG	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.72</b>	0.75	---




# OIL ANALYSIS REPORT

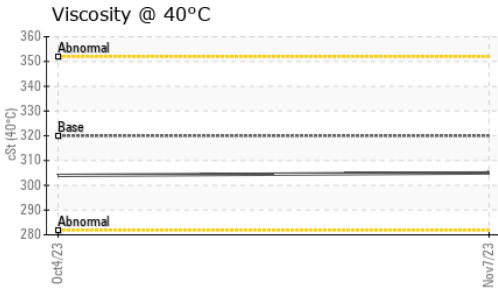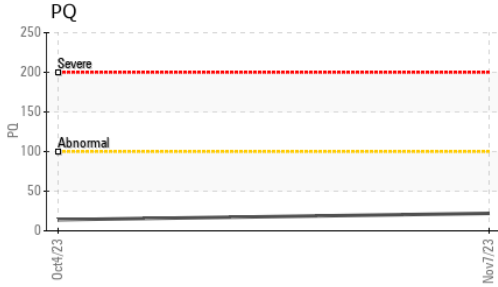





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	320	<b>305</b>	304	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

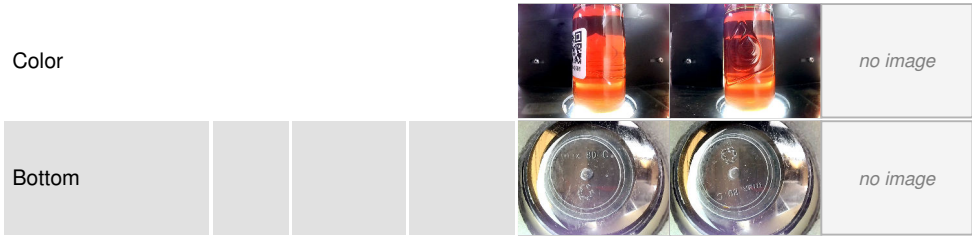

## GRAPHS

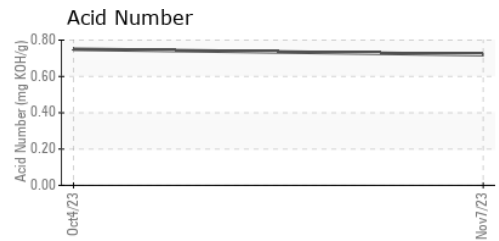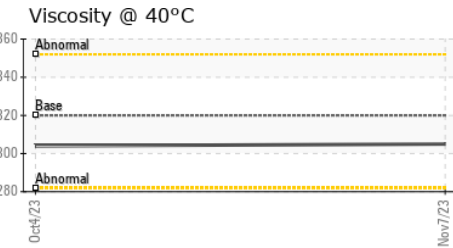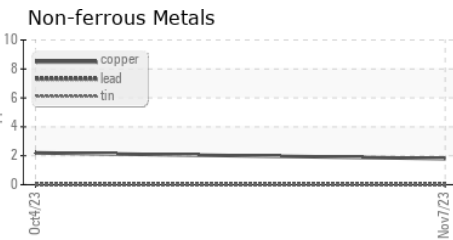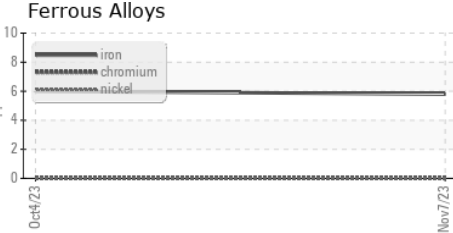

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0849601 **Received** : 15 Nov 2023  
**Lab Number** : 06008457 **Diagnosed** : 30 Nov 2023  
**Unique Number** : 10742219 **Diagnostician** : Jonathan Hester  
**Test Package** : PLANT

**NOKIAN TYRES US OPERATIONS LLC**  
 520 NOKIAN TYRES DRIVE  
 DAYTON, TN  
 US 37321  
 Contact: ALBERT JEFFRIES  
 albert.jeffries@nokiantyres.com  
 T: (423)285-2800  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)