




# PROBLEM SUMMARY

Sample Rating Trend

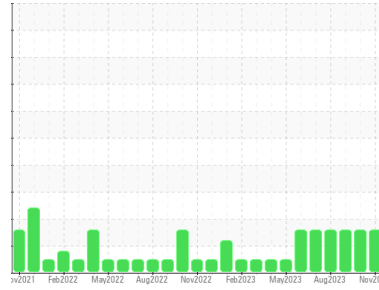


**WATER**



Area  
**HPU27**  
 Machine Id  
**HTS35**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO HYJET IV-A PLUS (30 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Water (KF)

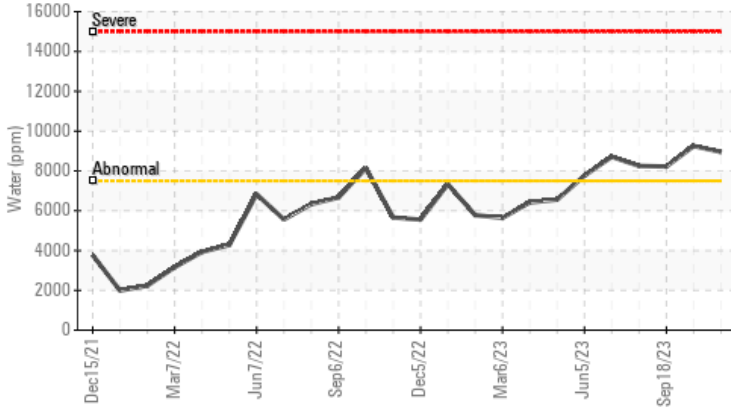

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Water	%	ASTM D6304	>0.750	▲ <b>0.895</b>	▲ 0.925	▲ 0.822
ppm Water	ppm	ASTM D6304	>7500	▲ <b>8950</b>	▲ 9250	▲ 8220

Customer Id: PARDUBGA  
 Sample No.: WC0817743  
 Lab Number: 06008764  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 16 Oct 2023 Diag: Angela Borella

#### WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a light concentration of water present in the oil. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 18 Sep 2023 Diag: Jonathan Hester

#### WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a light concentration of water present in the oil. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 07 Aug 2023 Diag: Angela Borella

#### WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a light concentration of water present in the oil. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

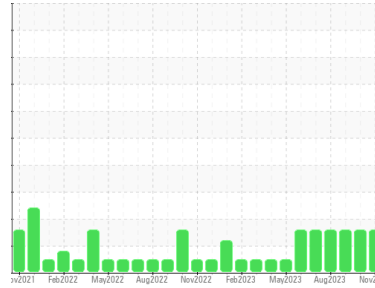

**WATER**



Area  
**HPU27**  
 Machine Id  
**HTS35**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO HYJET IV-A PLUS (30 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a light concentration of water present in the oil. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0817743</b>	WC0817694	WC0817669
Sample Date	Client Info		<b>13 Nov 2023</b>	16 Oct 2023	18 Sep 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >20	<b>0</b>	4	6
Nickel	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	2	3
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	5	6
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	6	2
Calcium	ppm	ASTM D5185m 110	<b>131</b>	117	132
Phosphorus	ppm	ASTM D5185m 37	<b>32215</b>	41412	50000
Zinc	ppm	ASTM D5185m	<b>8</b>	0	0
Sulfur	ppm	ASTM D5185m 220	<b>304</b>	261	370

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>4</b>	6	2
Potassium	ppm	ASTM D5185m >20	<b>40</b>	33	40
Water	%	ASTM D6304 >0.750	<b>▲ 0.895</b>	▲ 0.925	▲ 0.822
ppm Water	ppm	ASTM D6304 >7500	<b>▲ 8950</b>	▲ 9250	▲ 8220

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	<b>102</b>	148	110
Particles >6µm	ASTM D7647	>160	<b>37</b>	51	28
Particles >14µm	ASTM D7647	>20	<b>6</b>	9	7
Particles >21µm	ASTM D7647	>4	<b>1</b>	4	2
Particles >38µm	ASTM D7647	>3	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>16/14/11	<b>14/12/10</b>	14/13/10	14/12/10

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.04	<b>0.461</b>	0.827	0.171




# OIL ANALYSIS REPORT

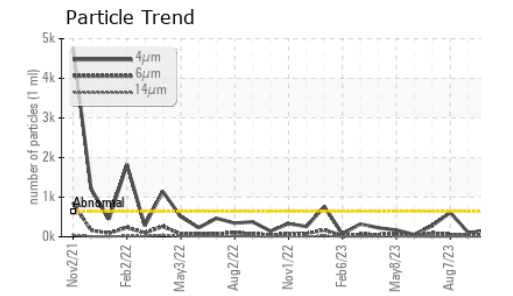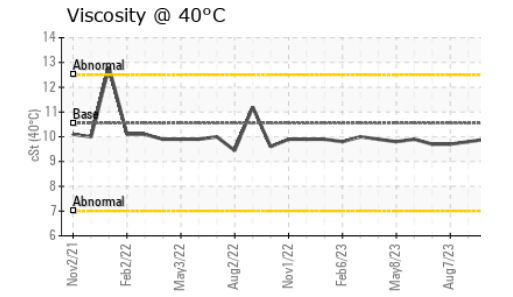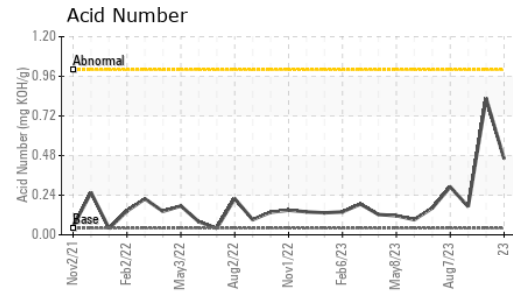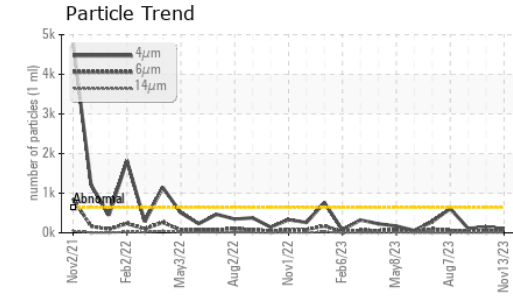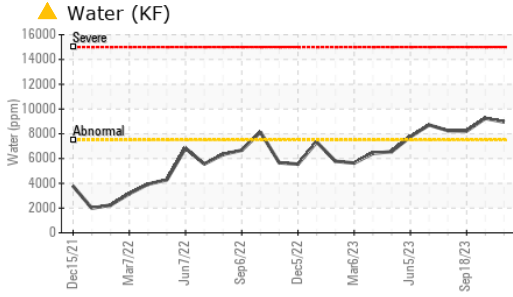





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.750	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298	.996	1.003	1.002	1.002
Visc @ 40°C	cSt	ASTM D445	10.3	9.9	9.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

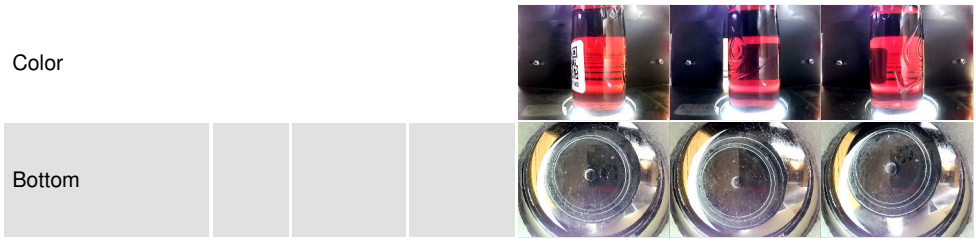

## GRAPHS

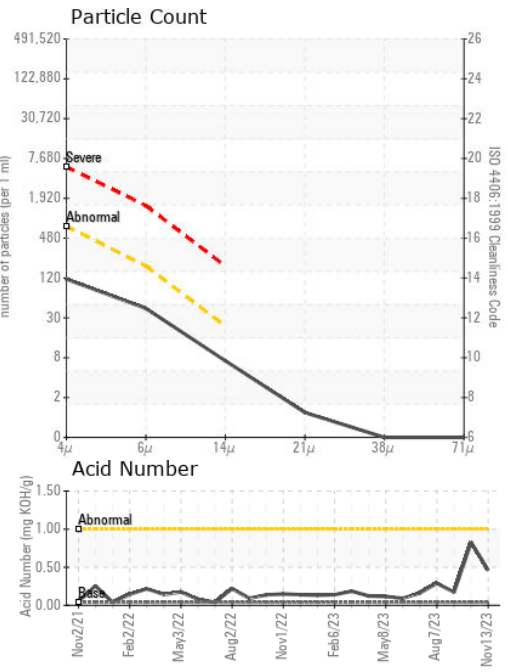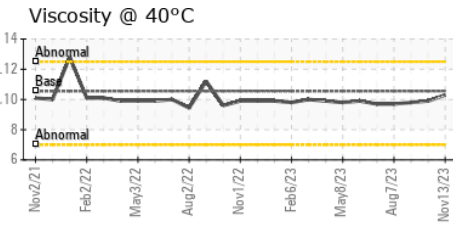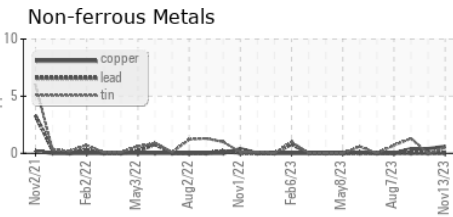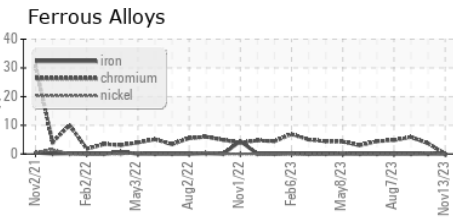

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0817743 **Received** : 15 Nov 2023  
**Lab Number** : 06008764 **Diagnosed** : 18 Nov 2023  
**Unique Number** : 10742526 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, SpecGravity )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**PARKER AEROSPACE**  
 2010 WALDROP INDUSTRIAL BLVD  
 DUBLIN, GA  
 US 31021  
 Contact: TRENT MCADAMS  
 trent.mcadams@parker.com  
 T: (478)275-4030  
 F: