




# PROBLEM SUMMARY

Sample Rating Trend

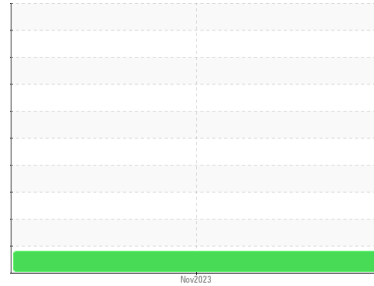


**WEAR**



Machine Id  
**NOT GIVEN SBP0004833**  
Component  
**Diesel Engine**  
Fluid  
**VALVOLINE PREMIUM BLUE (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Aluminum (ppm)

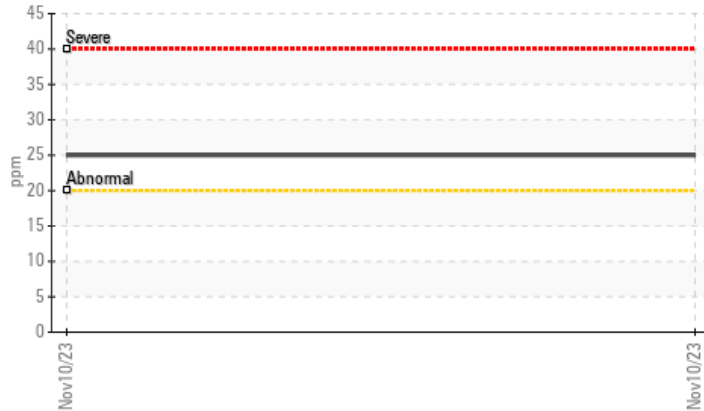

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |             |     | <b>ABNORMAL</b> | --- | --- |
|---------------|-----|-------------|-----|-----------------|-----|-----|
| Aluminum      | ppm | ASTM D5185m | >20 | ▲ 25            | --- | --- |

Customer Id: SAPPCORP  
Sample No.: SBP0004833  
Lab Number: 06008822  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Fluid  | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Change Filter | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**



Machine Id  
**NOT GIVEN SBP0004833**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE PREMIUM BLUE (--- GAL)**



## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>SBP0004833</b>  | ---      | ---      |
| Sample Date   | Client Info     | <b>10 Nov 2023</b> | ---      | ---      |
| Machine Age   | mls Client Info | <b>303374</b>      | ---      | ---      |
| Oil Age       | mls Client Info | <b>38817</b>       | ---      | ---      |
| Oil Changed   | Client Info     | <b>Changed</b>     | ---      | ---      |
| Sample Status |                 | <b>ABNORMAL</b>    | ---      | ---      |

## CONTAMINATION

| method | limit/base   | current        | history1 | history2 |
|--------|--------------|----------------|----------|----------|
| Fuel   | WC Method >5 | <b>&lt;1.0</b> | ---      | ---      |
| Glycol | WC Method    | <b>NEG</b>     | ---      | ---      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>53</b>    | ---      | ---      |
| Chromium | ppm ASTM D5185m >20  | <b>2</b>     | ---      | ---      |
| Nickel   | ppm ASTM D5185m >4   | <b>0</b>     | ---      | ---      |
| Titanium | ppm ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm ASTM D5185m >20  | <b>▲ 25</b>  | ---      | ---      |
| Lead     | ppm ASTM D5185m >40  | <b>3</b>     | ---      | ---      |
| Copper   | ppm ASTM D5185m >330 | <b>2</b>     | ---      | ---      |
| Tin      | ppm ASTM D5185m >15  | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 2.9  | <b>23</b>    | ---      | ---      |
| Barium     | ppm ASTM D5185m 0.1  | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm ASTM D5185m 0.0  | <b>52</b>    | ---      | ---      |
| Manganese  | ppm ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm ASTM D5185m 18   | <b>724</b>   | ---      | ---      |
| Calcium    | ppm ASTM D5185m 2936 | <b>1189</b>  | ---      | ---      |
| Phosphorus | ppm ASTM D5185m 998  | <b>691</b>   | ---      | ---      |
| Zinc       | ppm ASTM D5185m 1095 | <b>900</b>   | ---      | ---      |
| Sulfur     | ppm ASTM D5185m 5469 | <b>2087</b>  | ---      | ---      |

## CONTAMINANTS

| method    | limit/base          | current  | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>6</b> | ---      | ---      |
| Sodium    | ppm ASTM D5185m     | <b>4</b> | ---      | ---      |
| Potassium | ppm ASTM D5185m >20 | <b>8</b> | ---      | ---      |

## INFRA-RED

| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>1.6</b>  | ---      | ---      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>13.6</b> | ---      | ---      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>29.3</b> | ---      | ---      |


## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>29.9</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g ASTM D2896 10.0 | <b>4.8</b>  | ---      | ---      |



# OIL ANALYSIS REPORT

### ▲ Aluminum (ppm)

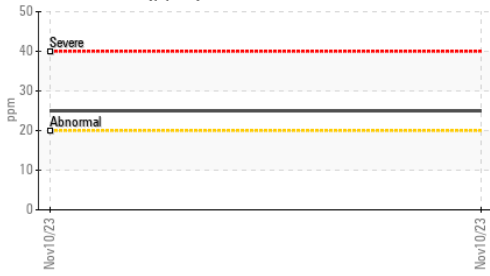


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |


| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.2    | <b>14.6</b> | ---      |

### GRAPHS


### Viscosity @ 40°C

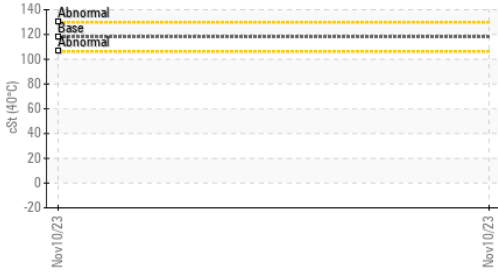

### Viscosity @ 100°C

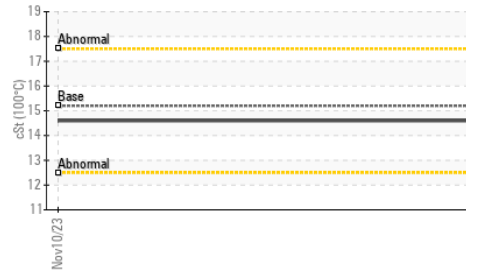


### Viscosity @ 40°C

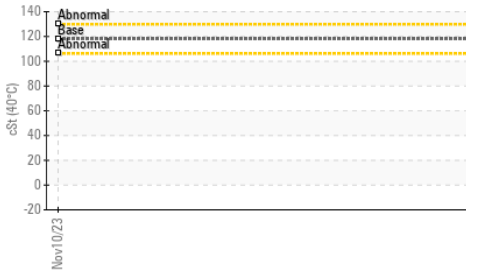


### Ferrous Alloys




### Non-ferrous Metals

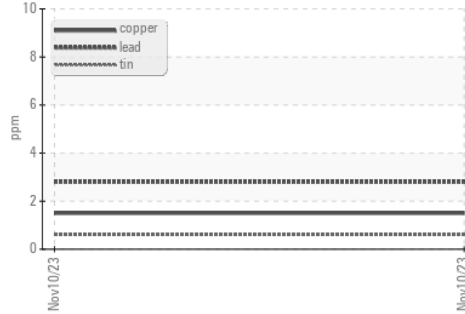

### Viscosity @ 100°C

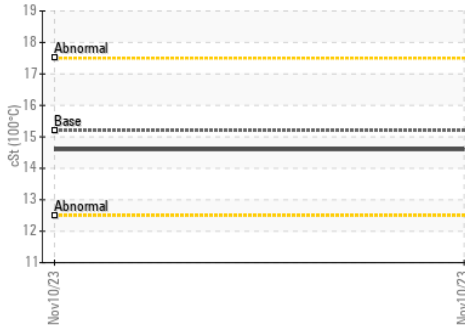

### Base Number

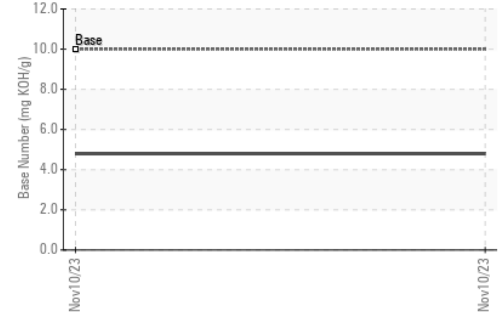

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004833 **Received** : 15 Nov 2023  
**Lab Number** : 06008822 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10742584 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: KV40 )

**Sapp Bros. Petroleum - Corporate - OMA**  
 9915 South 148th  
 OMAHA, NE  
 US 68138  
 Contact: Josh Broz  
 JBroz@sappbros.net  
 T: (402)895-2202  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)