




OIL ANALYSIS REPORT

Sample Rating Trend

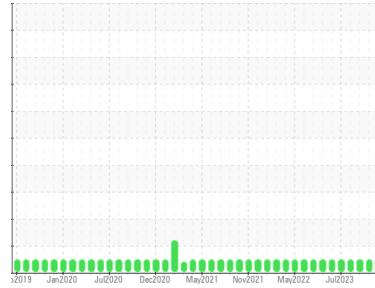

NORMAL



Area
OKLAHOMA
 Machine Id
2013 MACK 10277
 Component
Diesel Engine
 Fluid
MYSTIK JT-8 SYN SUPER HD 15W50 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCMFA67290	WC0810702	WC0810725
Sample Date	Client Info		08 Nov 2023	05 Oct 2023	11 Sep 2023
Machine Age	hrs	Client Info	1059	12933	12933
Oil Age	hrs	Client Info	1059	0	1057
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	9	9	11
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >5	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	3	3
Lead	ppm	ASTM D5185m >40	0	2	<1
Copper	ppm	ASTM D5185m >330	4	3	3
Tin	ppm	ASTM D5185m >15	<1	1	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	30	33	39
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	7	8	10
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	278	296	317
Calcium	ppm	ASTM D5185m	1698	1812	2074
Phosphorus	ppm	ASTM D5185m	827	920	938
Zinc	ppm	ASTM D5185m	1044	1107	1173
Sulfur	ppm	ASTM D5185m	3097	3277	4155

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	5	5
Sodium	ppm	ASTM D5185m	5	4	5
Potassium	ppm	ASTM D5185m >20	<1	5	4

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.2	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	9.9	9.5	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.6	22.4	21.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.0	15.4	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	6.0	5.9	5.4







OIL ANALYSIS REPORT

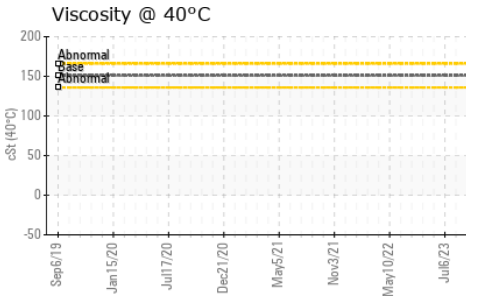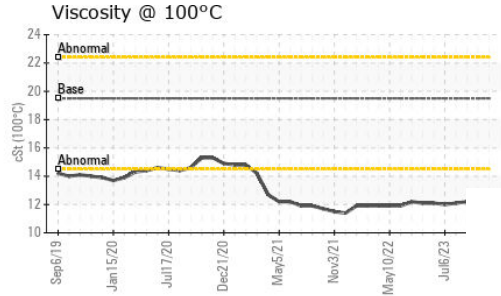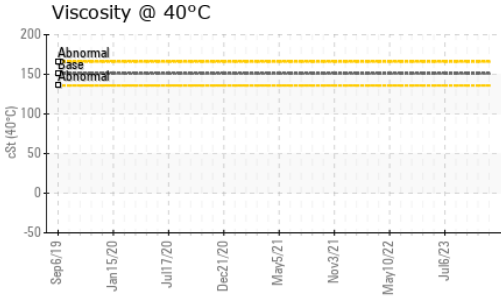

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	19.5	12.0	12.0	12.2

GRAPHS

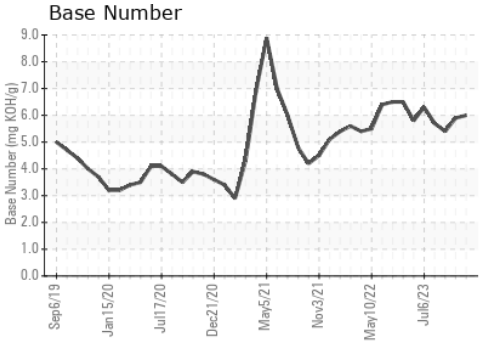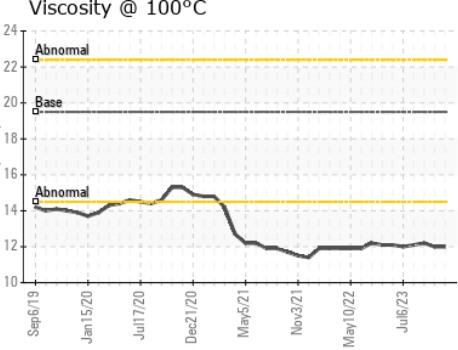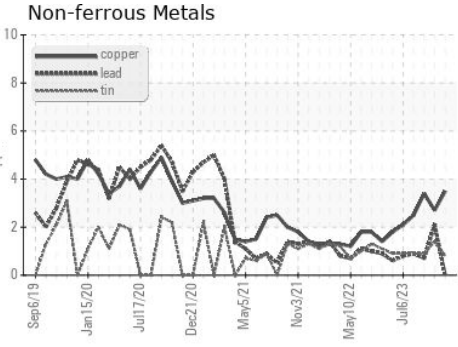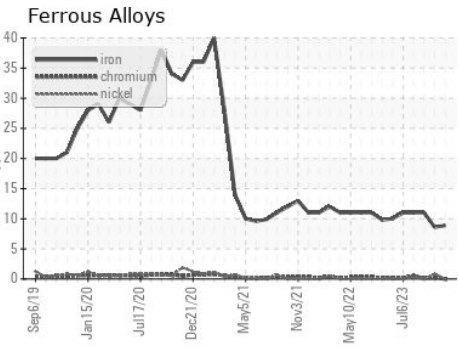

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCMFA67290 **Received** : 15 Nov 2023
Lab Number : **06008862** **Diagnosed** : 16 Nov 2023
Unique Number : 10742624 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: KV40)

LIBERTY DISPOSAL
 6401 S EASTERN AVE
 OKLAHOMA CITY, OK
 US 73149
 Contact: Loran Cottle
 l.cottle@ldi89.com
 T: (910)970-0291
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)