




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**53-04L**  
Component  
**Hydraulic System**  
Fluid  
**NOT GIVEN (--- GAL)**

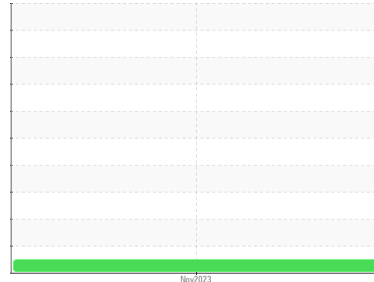

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0793240</b>	---	---
Sample Date	Client Info			<b>13 Nov 2023</b>	---	---
Machine Age	hrs	Client Info		<b>636</b>	---	---
Oil Age	hrs	Client Info		<b>414</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>71	<b>2</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>6	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>11	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>13	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>21	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	---	---
Calcium	ppm	ASTM D5185m		<b>105</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>728</b>	---	---
Zinc	ppm	ASTM D5185m		<b>890</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2043</b>	---	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>24	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m	>21	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>80000	<b>2467</b>	---	---
Particles >6µm		ASTM D7647	>5000	<b>405</b>	---	---
Particles >14µm		ASTM D7647	>640	<b>34</b>	---	---
Particles >21µm		ASTM D7647	>160	<b>11</b>	---	---
Particles >38µm		ASTM D7647	>40	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>23/19/16	<b>18/16/12</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.71</b>	---	---



# OIL ANALYSIS REPORT

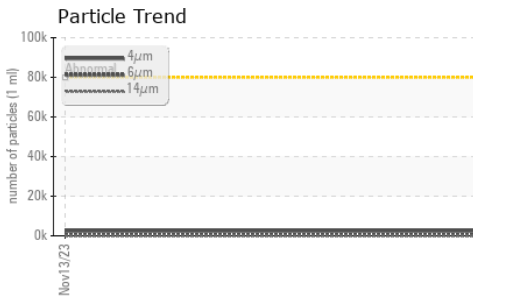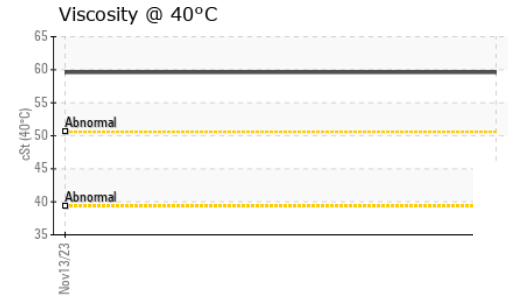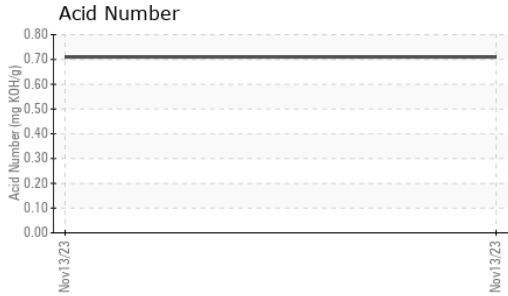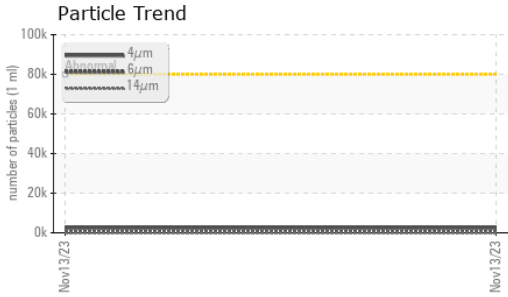





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

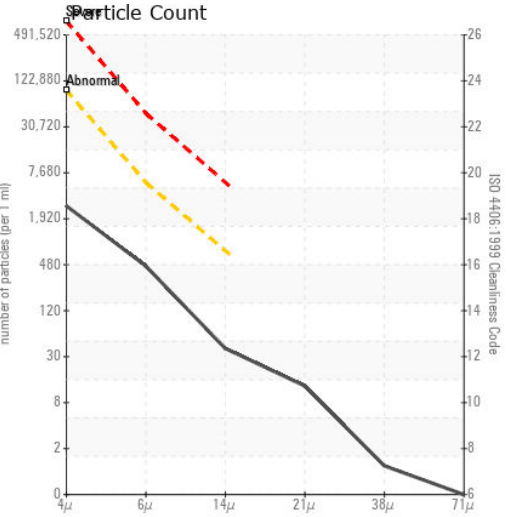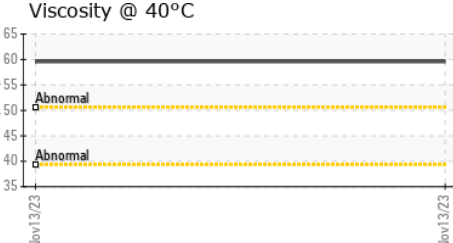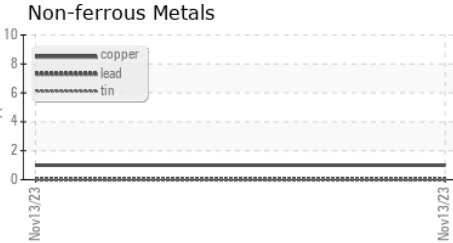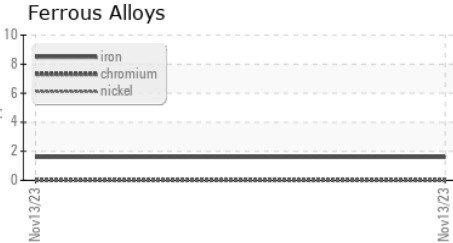

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0793240 **Received** : 15 Nov 2023  
**Lab Number** : 06009050 **Diagnosed** : 19 Nov 2023  
**Unique Number** : 10742812 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ, PrtCount )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)