


PROBLEM SUMMARY


OKLAHOMA/102/EG - SKID STEER Machine Id 53.151L [OKLAHOMA^102^EG - SKID STEER]

Hydraulic System

MOBIL MOBILTRANS AST 30 (10 GAL)

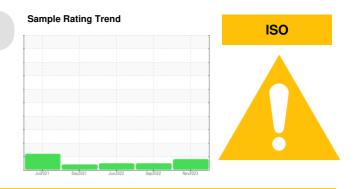

COMPONENT CONDITION SUMMARY

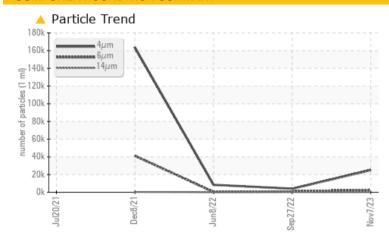

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS				
Sample Status			ATTENTION	NORMAL	NORMAL
Particles >6µm	ASTM D7647	>2500	^ 2617	846	448
Oil Cleanliness	ISO 4406 (c)	>/18/16	22/19/13	19/17/13	20/16/12

Customer Id: SHEWIC Sample No.: WC0857379 Lab Number: 06009061 Test Package: CONST

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

27 Sep 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



08 Jun 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



08 Dec 2021 Diag: Don Baldridge

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






OIL ANALYSIS REPORT

OKLAHOMA/102/EG - SKID STEER Machine Id 53.151L [OKLAHOMA^102^EG - SKID STEER]

Component

Hydraulic System

MOBIL MOBILTRANS AST 30 (10 GAL)





DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2021	Dec2021	Jun2022 Sep2022	Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857379	WC0741236	WC0702208
Sample Date		Client Info		07 Nov 2023	27 Sep 2022	08 Jun 2022
Machine Age	hrs	Client Info		3422	2293	2293
Oil Age	hrs	Client Info		1129	2293	1548
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	9	14	24
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	1	2	2
Lead	ppm	ASTM D5185m	>10	<1	1	3
Copper	ppm	ASTM D5185m	>75	4	8	14
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ρρ			-		-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		77	2	0
Barium	ppm	ASTM D5185m		6	0	0
Molybdenum	ppm	ASTM D5185m		23	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		258	7	1
Calcium	ppm	ASTM D5185m		2115	1534	159
Phosphorus	ppm	ASTM D5185m		962	827	680
Zinc	ppm	ASTM D5185m		1065	976	879
Sulfur	ppm	ASTM D5185m		3575	3161	1700
CONTAMINANTS	}	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8	1	3
Sodium	ppm	ASTM D5185m		0	4	1
Potassium	ppm	ASTM D5185m	>20	1	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		25030	4015	8394
Particles >6µm		ASTM D7647	>2500	<u>^</u> 2617	846	448
Particles >14µm		ASTM D7647	>640	45	65	28
Particles >21µm		ASTM D7647	>160	7	15	8
Particles >38µm		ASTM D7647	>40	0	1	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/16	<u>22/19/13</u>	19/17/13	20/16/12
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

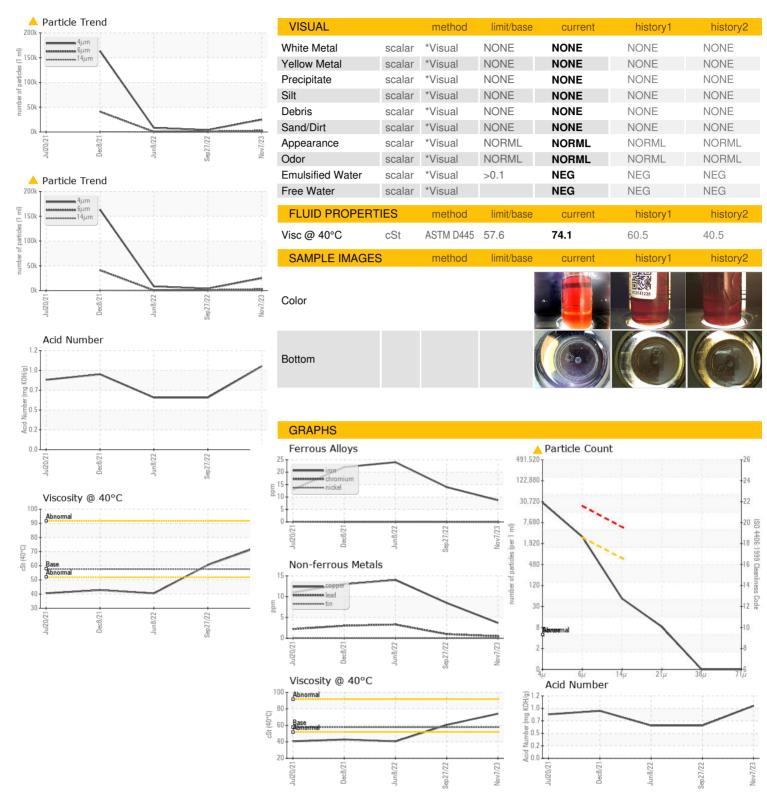





Laboratory Sample No. Lab Number **Unique Number**

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: WC0857379 : 06009061 : 10742823

Diagnostician : Don Baldridge Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

: 15 Nov 2023

: 19 Nov 2023



3219 WEST MAY ST WICHITA, KS US 67213 Contact: DOUG KING

doug.king@sherwood.net

T: (316)617-3161

F: x: