


PROBLEM SUMMARY

PALFINGER 54724 - L&W SUPPLY

Hydraulic System Fluid AW HYDRAULIC OIL ISO 32 (--- GAL)

COMPONENT CONDITION SUMMARY

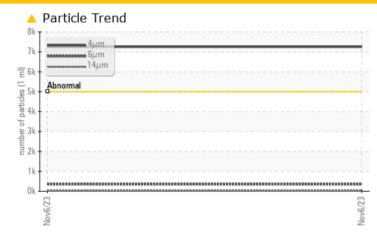

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION				
Particles >4µm	ASTM D7647	>5000	<u> </u>				
Oil Cleanliness	ISO 4406 (c)	>19/17/14	 20/16/12				


Customer Id: PALJACNJ Sample No.: WC0813971 Lab Number: 06009070 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

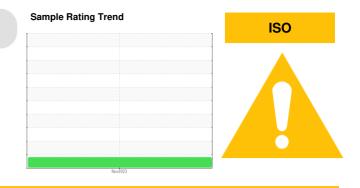

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.			

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

SAMPLE INFORMATION

hrs

hrs

Sample Number

Sample Date

Machine Age

Oil Changed

Oil Age

Machine Id PALFINGER 54724 - L&W SUPPLY Component

Hydraulic System AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sampl	e Rating Tren	d	ISO			
	Nex	1023				
method	limit/base	current	his	tory1	history2	
Client Info	,	NC0813971				
Client Info	(06 Nov 2023				
Client Info	-	1849				
Client Info	-	1849				
Client Info	I	Not Changd				

Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	1		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>75	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	6		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	2		
Calcium	ppm	ASTM D5185m	200	76		
Phosphorus	ppm	ASTM D5185m	300	386		
Zinc	ppm	ASTM D5185m	370	429		
Sulfur	ppm	ASTM D5185m	2500	917		
CONTAMINANTS		method	limit/base	current	history1	history2
CONTAMINANTS Silicon	ppm	method ASTM D5185m	limit/base >20	current 0	history1	history2
Silicon	ppm	ASTM D5185m		0		
Silicon Sodium	ppm ppm ppm	ASTM D5185m ASTM D5185m	>20	0		
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20	0 0 <1		
Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method	>20 >20 limit/base	0 0 <1 current		
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647	>20 >20 limit/base >5000	0 0 <1 current 7253	 history1	 history2

Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.66		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 20/16/12		
Particles >71µm		ASTM D7647	>3	0		
Particles >38µm		ASTM D7647	>10	0		
Particles >21µm		ASTM D7647	>40	6		
Particles >14µm		ASTM D7647	>160	22		

Report Id: PALJACNJ [WUSCAR] 06009070 (Generated: 11/16/2023 16:34:47) Rev: 1



Acid Number

Viscosity @ 40°C

1.00

0.8 물0.60

e 0.40

0.00

40

38

36

() 00 04 ني 32

> 30 Abn

28 26 dove /22

Ab Pio 0.20

OIL ANALYSIS REPORT


method


limit/base

current

history1

history2

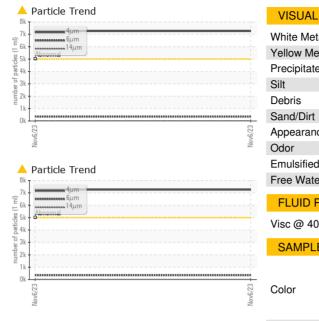

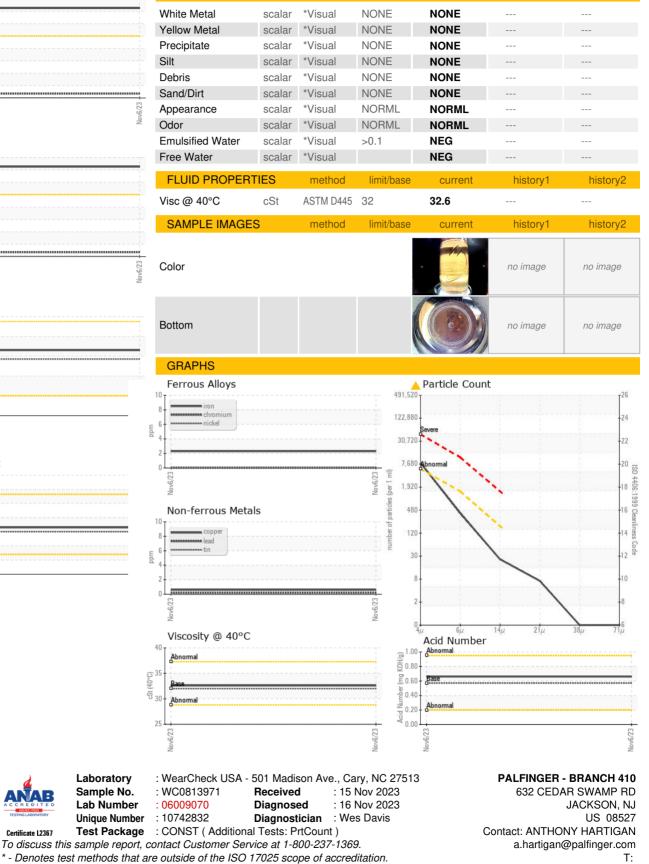

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: