




PROBLEM SUMMARY

Sample Rating Trend

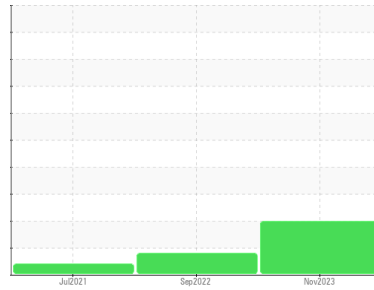

ISO




Machine Id
4800100 (S/N 1209)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

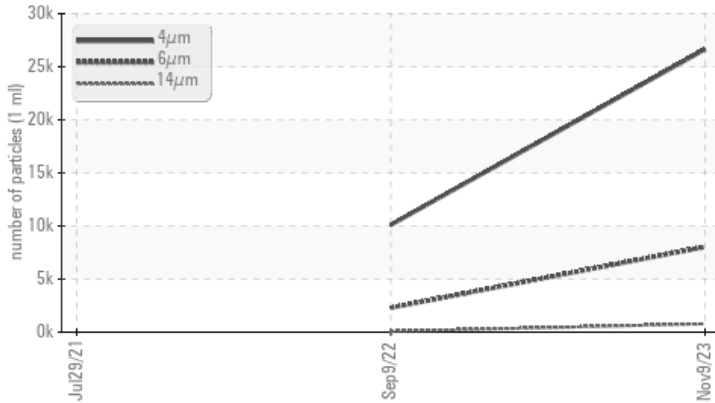

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ATTENTION	ABNORMAL
Particles >6µm	>1300	▲ 8026	▲ 2286	---	
Particles >14µm	>80	▲ 788	60	---	
Particles >21µm	>20	▲ 251	7	---	
Particles >38µm	>4	▲ 15	1	---	
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 22/20/17	▲ 21/18/13	---

Customer Id: DIVCHANC
Sample No.: KCPA009785
Lab Number: 06009094
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

09 Sep 2022 Diag: Don Baldrige

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



29 Jul 2021 Diag: Angela Borella

VIS DEBRIS




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

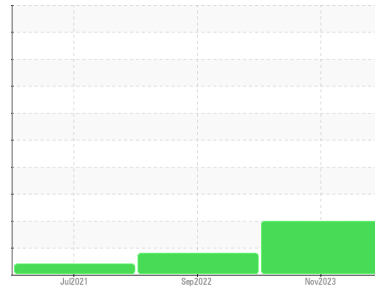

ISO



Machine Id
4800100 (S/N 1209)

Component

Compressor

Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA009785	KCP46315	KCP41765
Sample Date	Client Info	09 Nov 2023	09 Sep 2022	29 Jul 2021
Machine Age	hrs	22283	19573	17141
Oil Age	hrs	0	3000	3000
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	0	3
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	1	<1	0
Lead	ppm	ASTM D5185m >10	0	0	0
Copper	ppm	ASTM D5185m >50	5	6	14
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 90	10	3	0
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m 100	63	60	<1
Calcium	ppm	ASTM D5185m 0	1	1	0
Phosphorus	ppm	ASTM D5185m 0	19	5	4
Zinc	ppm	ASTM D5185m 0	8	28	6
Sulfur	ppm	ASTM D5185m 23500	22429	18818	16851

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<1	2	0
Sodium	ppm	ASTM D5185m	11	16	0
Potassium	ppm	ASTM D5185m >20	3	0	0
Water	%	ASTM D6304 >0.05	0.036	0.025	0.011
ppm Water	ppm	ASTM D6304 >500	366.6	257.2	114.7






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	26654	10111	---
Particles >6µm	ASTM D7647 >1300	▲ 8026	▲ 2286	---
Particles >14µm	ASTM D7647 >80	▲ 788	60	---
Particles >21µm	ASTM D7647 >20	▲ 251	7	---
Particles >38µm	ASTM D7647 >4	▲ 15	1	---
Particles >71µm	ASTM D7647 >3	1	1	---
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 22/20/17	▲ 21/18/13	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.36	0.38	0.401

OIL ANALYSIS REPORT

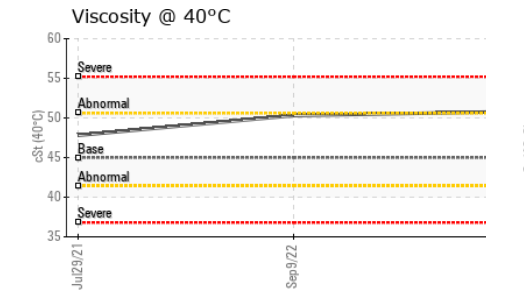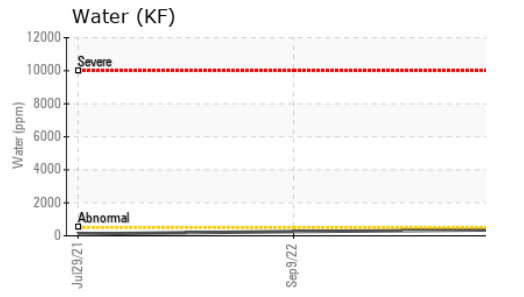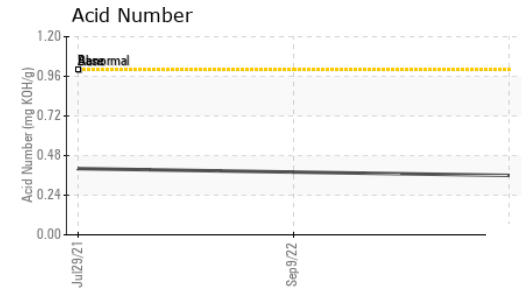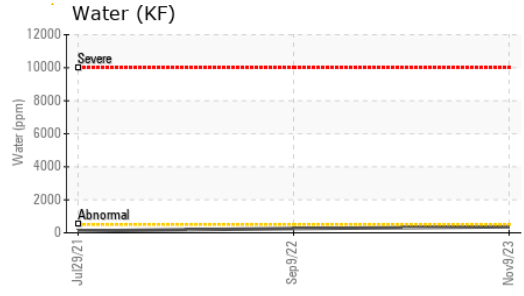
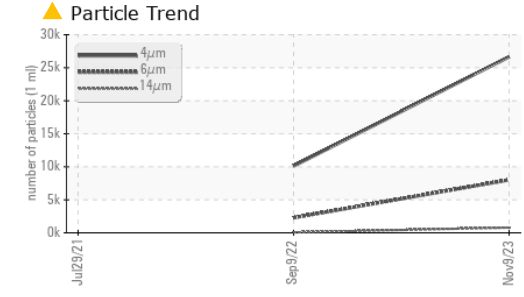


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	50.8	50.3	47.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

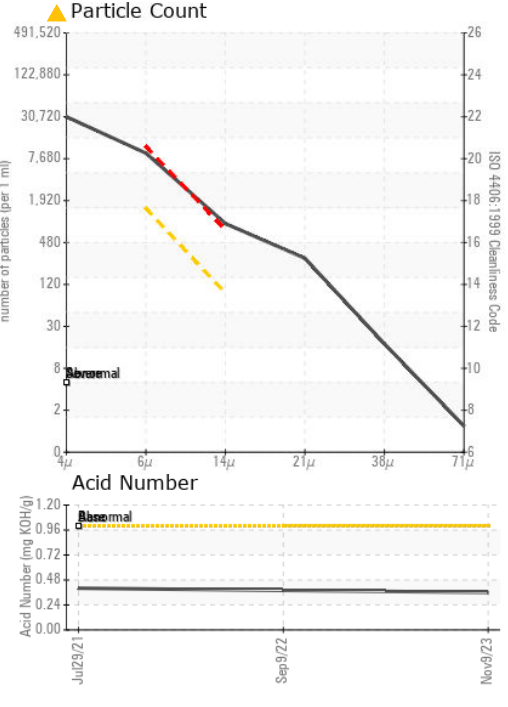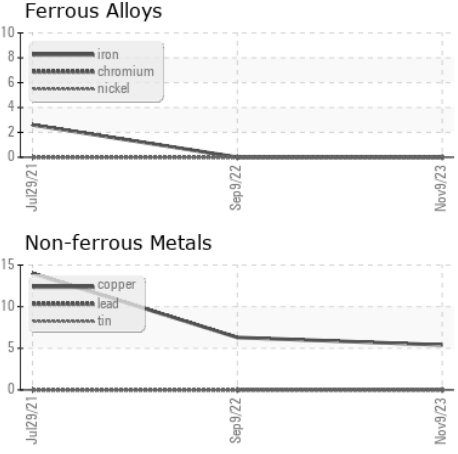

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA009785 **Received** : 15 Nov 2023
Lab Number : 06009094 **Diagnosed** : 19 Nov 2023
Unique Number : 10742856 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

DIVERSIFIED PRINTING TECHNIQUES
 13336 S RIDGE DR
 CHARLOTTE, NC
 US 28273
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)