




PROBLEM SUMMARY

Sample Rating Trend

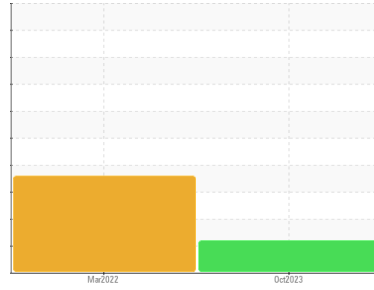


FUEL




Machine Id
NN874499
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

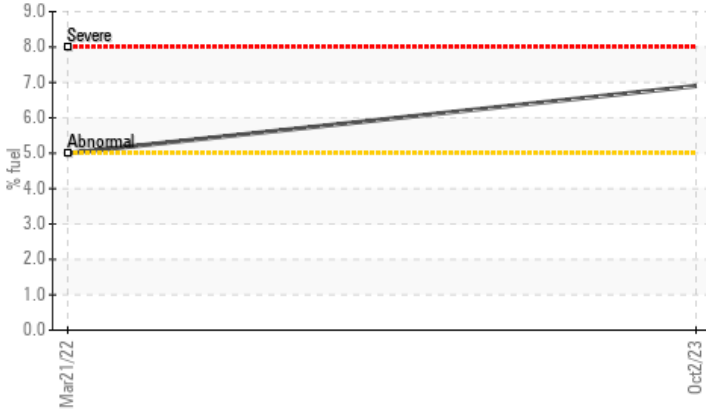

▲ Viscosity @ 100°C

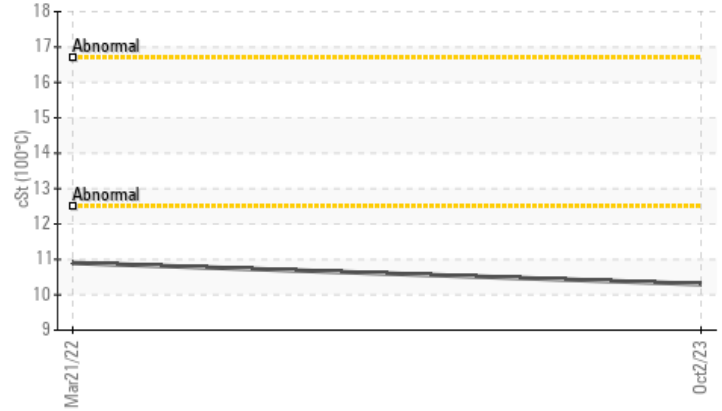

RECOMMENDATION

We advise that you check the fuel injection system.
 We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status	%	ASTM D3524	>5	ABNORMAL	ABNORMAL	---
Fuel				▲ 6.9	▲ 5.0	---
Visc @ 100°C	cSt	ASTM D445		▲ 10.3	▲ 10.9	---

Customer Id: IDEATLGA
 Sample No.: IL06009302
 Lab Number: 06009302
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

21 Mar 2022 Diag: Doug Bogart

DIRT



We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We advise that you check the fuel injection system. We recommend an early resample to monitor this condition. All component wear rates are normal. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a moderate amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

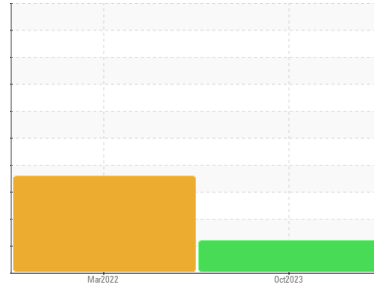

FUEL



Machine Id
NN874499
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	IL06009302	IL05509355	---
Sample Date	Client Info	02 Oct 2023	21 Mar 2022	---
Machine Age	hrs	Client Info	19802	4695
Oil Age	hrs	Client Info	19802	500
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG
Glycol	WC Method		NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	36	41
Chromium	ppm	ASTM D5185m	>20	2	2
Nickel	ppm	ASTM D5185m	>4	<1	0
Titanium	ppm	ASTM D5185m		0	0
Silver	ppm	ASTM D5185m	>3	0	<1
Aluminum	ppm	ASTM D5185m	>20	15	▲ 13
Lead	ppm	ASTM D5185m	>40	8	4
Copper	ppm	ASTM D5185m	>330	7	29
Tin	ppm	ASTM D5185m	>15	3	3
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		25	85
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		40	56
Manganese	ppm	ASTM D5185m		1	4
Magnesium	ppm	ASTM D5185m		451	403
Calcium	ppm	ASTM D5185m		1471	1578
Phosphorus	ppm	ASTM D5185m		664	968
Zinc	ppm	ASTM D5185m		819	1147
Sulfur	ppm	ASTM D5185m		2080	2490

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	10	▲ 39
Sodium	ppm	ASTM D5185m		4	5
Potassium	ppm	ASTM D5185m	>20	41	46
Fuel	%	ASTM D3524	>5	▲ 6.9	▲ 5.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	13.1	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.5	20.5

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.8	16.7
Base Number (BN)	mg KOH/g	ASTM D2896		5.5	7.7







OIL ANALYSIS REPORT

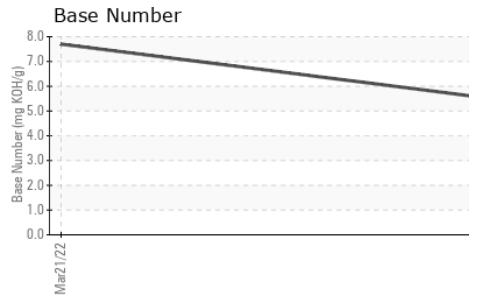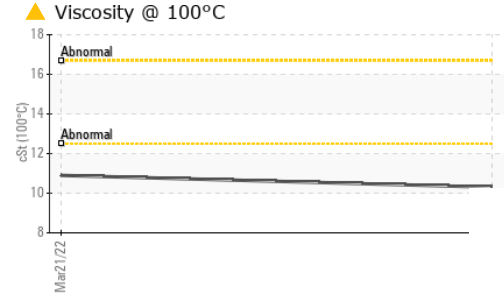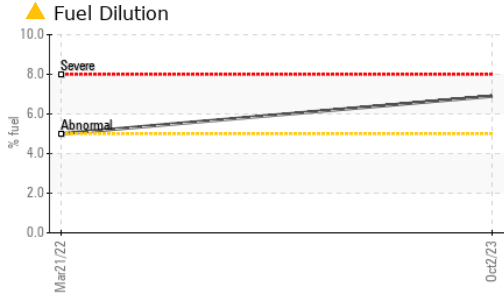

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.3	▲ 10.9	---

GRAPHS

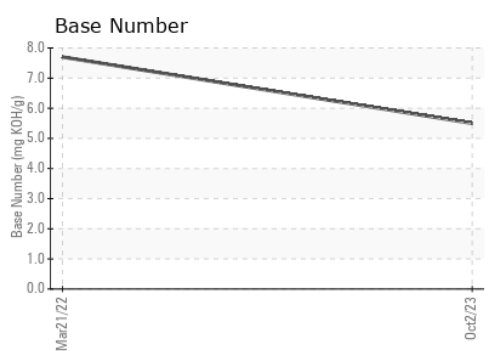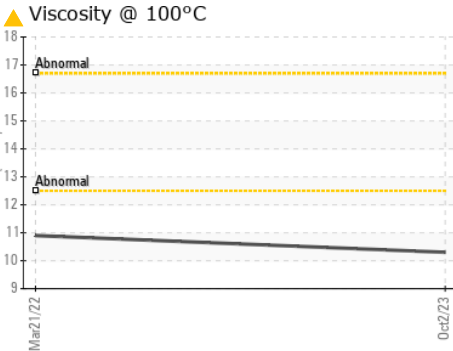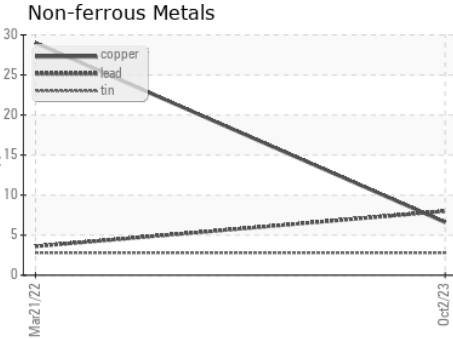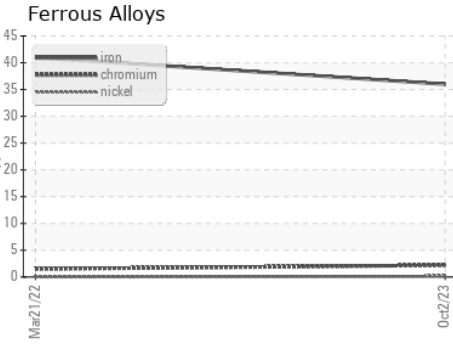

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06009302 **Received** : 16 Nov 2023
Lab Number : 06009302 **Diagnosed** : 20 Nov 2023
Unique Number : 10743064 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: PercentFuel)

IDEALRELEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331
 Contact: DAVID JOHNS
 davidjohns@idealease.com
 T: (404)699-5571
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)