




OIL ANALYSIS REPORT

Sample Rating Trend

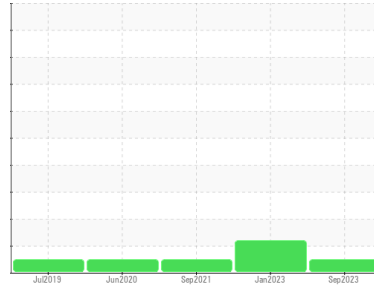

NORMAL



Machine Id
19502

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			IL06009310	IL05747646	IL05397200
Sample Date	Client Info			07 Sep 2023	19 Jan 2023	28 Sep 2021
Machine Age	mls	Client Info		180713	155520	104597
Oil Age	mls	Client Info		40000	40000	40000
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	1.1
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	17	65	8
Chromium	ppm	ASTM D5185m	>20	2	4	1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	4	7	2
Lead	ppm	ASTM D5185m	>40	2	12	<1
Copper	ppm	ASTM D5185m	>330	2	8	<1
Tin	ppm	ASTM D5185m	>15	<1	3	0
Antimony	ppm	ASTM D5185m		---	---	1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	24	15	42
Barium	ppm	ASTM D5185m	10	0	2	0
Molybdenum	ppm	ASTM D5185m	100	41	32	31
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m	450	495	559	711
Calcium	ppm	ASTM D5185m	3000	1617	1455	1550
Phosphorus	ppm	ASTM D5185m	1150	722	641	726
Zinc	ppm	ASTM D5185m	1350	896	856	816
Sulfur	ppm	ASTM D5185m	4250	2296	2734	3654



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	9	6
Sodium	ppm	ASTM D5185m		3	4	2
Potassium	ppm	ASTM D5185m	>20	6	12	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.8	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.5	15.9	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.9	30.9	20.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.7	34.0	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.7	▲ 3.0	8.3







OIL ANALYSIS REPORT

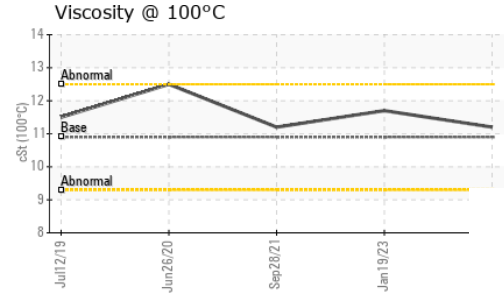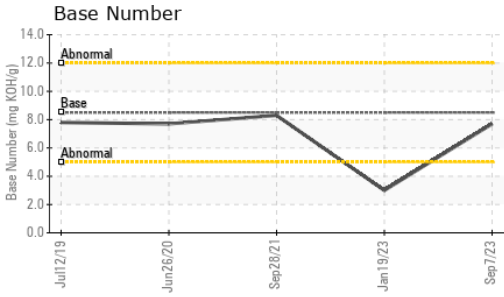

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	11.2	11.7	11.2

GRAPHS

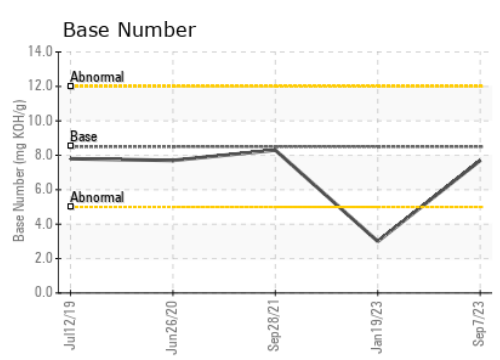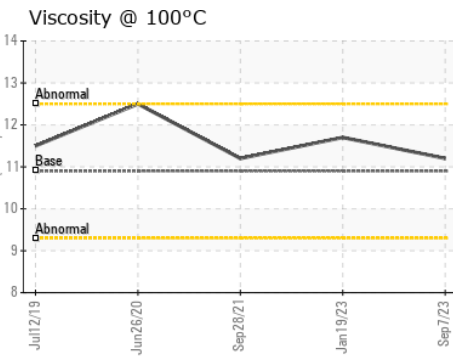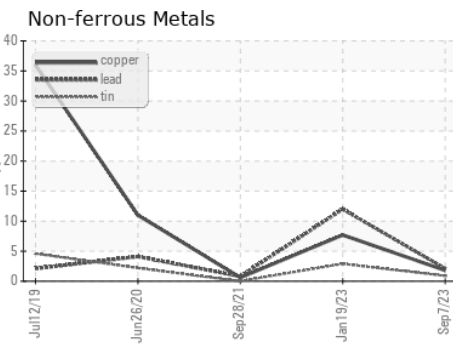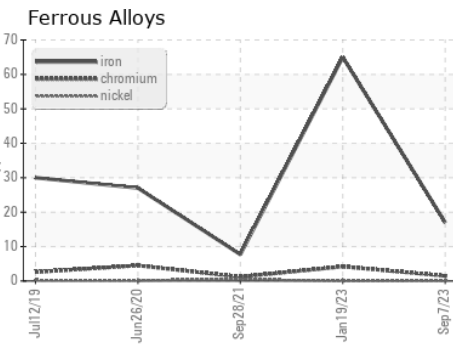

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06009310 **Received** : 16 Nov 2023
Lab Number : **06009310** **Diagnosed** : 17 Nov 2023
Unique Number : 10743072 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALRELEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331
 Contact: DAVID JOHNS
 davidjohns@idealease.com
 T: (404)699-5571
 F: (404)699-7420

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)