




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

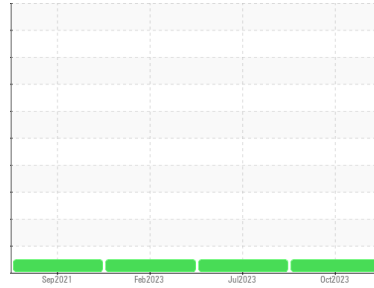

Machine Id  
**8028623**  
 Component  
**Diesel Engine**  
 Fluid  
**NOT GIVEN (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL06009318</b>	IL05911760	IL05772458
Sample Date	Client Info			<b>19 Oct 2023</b>	25 Jul 2023	14 Feb 2023
Machine Age	mls Client Info			<b>371886</b>	350030	310354
Oil Age	mls Client Info			<b>40000</b>	40000	40000
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>11</b>	27	38
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	9	6
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>25</b>	16	21
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>41</b>	47	48
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>492</b>	492	510
Calcium	ppm	ASTM D5185m		<b>1606</b>	1678	1685
Phosphorus	ppm	ASTM D5185m		<b>736</b>	723	760
Zinc	ppm	ASTM D5185m		<b>891</b>	911	925
Sulfur	ppm	ASTM D5185m		<b>2409</b>	2397	2439




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	10
Sodium	ppm	ASTM D5185m		<b>3</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	6	8
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	11.5	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.0</b>	23.8	23.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.6</b>	24.0	23.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	7.7	7.2







# OIL ANALYSIS REPORT

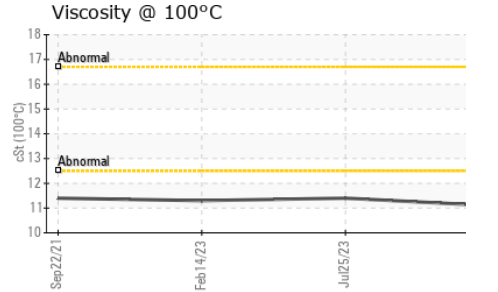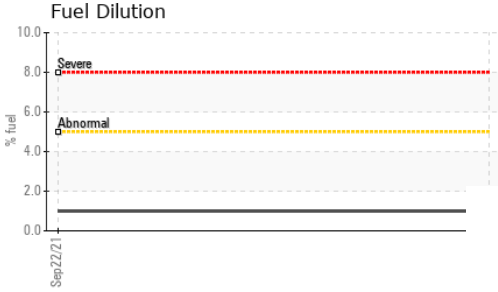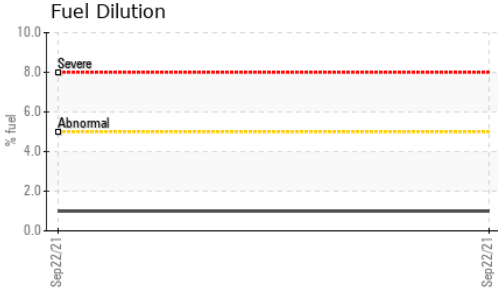

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>11.1</b>	11.4	11.3

## GRAPHS

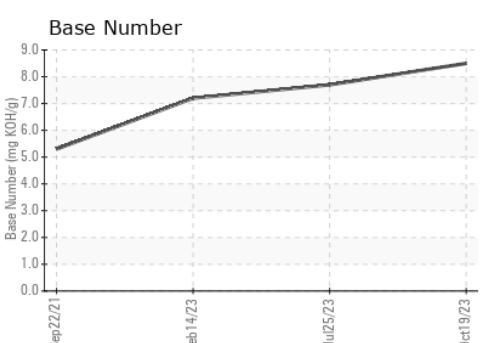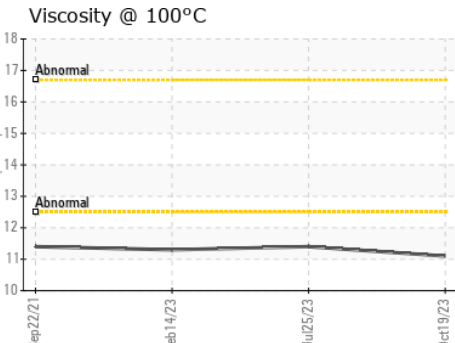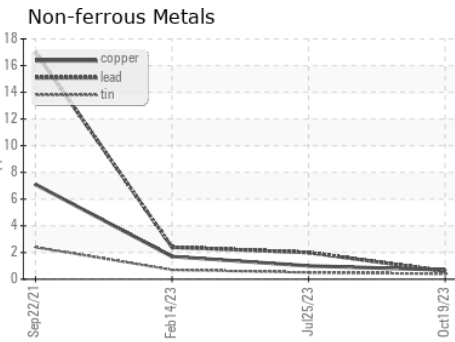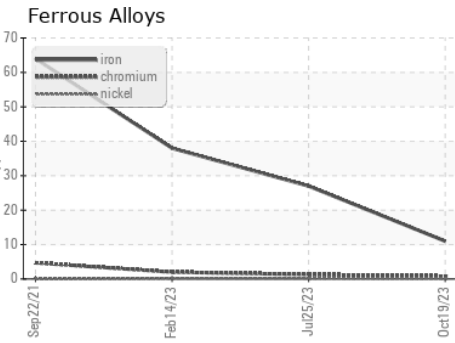

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL06009318      **Received** : 16 Nov 2023  
**Lab Number** : **06009318**      **Diagnosed** : 19 Nov 2023  
**Unique Number** : 10743080      **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution )

**IDEALRELEASE OF ATLANTA - FULTON**  
 4675 BAKERS FERRY ROAD  
 ATLANTA, GA  
 US 30331  
 Contact: DAVID JOHNS  
 davidjohns@idealease.com  
 T: (404)699-5571  
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)