




PROBLEM SUMMARY


Sample Rating Trend

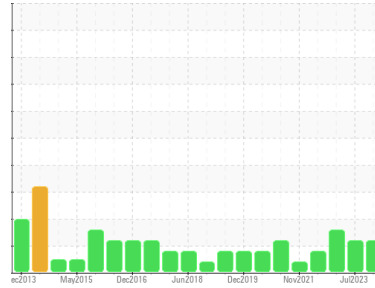

Area
426
 Machine Id
426 STRIP STACKER
 Component
Inboard Journal Bearing
 Fluid
ESSO NUTO H ISO 68 (1 QTS)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

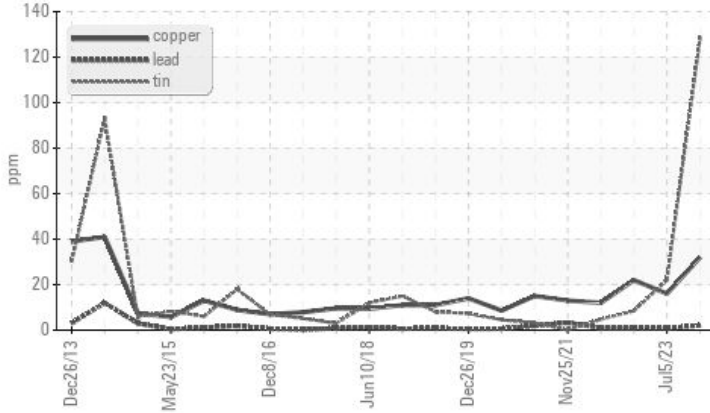

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Tin	ppm	ASTM D5185m	>80	▲ 128	22	8
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE

Customer Id: BRIDES
 Sample No.: WC0838860
 Lab Number: 06009534
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

05 Jul 2023 Diag: Angela Borella

ISO



The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



30 Dec 2022 Diag: Angela Borella

ISO



No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Jul 2022 Diag: Doug Bogart

ISO



The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 6 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

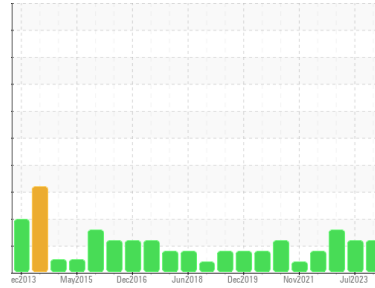

WEAR



Area
426
 Machine Id
426 STRIP STACKER
 Component
Inboard Journal Bearing
 Fluid
ESSO NUTO H ISO 68 (1 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0838860	WC0397539	WC0640530
Sample Date	Client Info		10 Nov 2023	05 Jul 2023	30 Dec 2022
Machine Age	mths	Client Info	6	0	6
Oil Age	mths	Client Info	0	6	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		11	10	10
Iron	ppm	ASTM D5185m >60	2	<1	2
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >4	<1	<1	<1
Lead	ppm	ASTM D5185m >250	2	<1	<1
Copper	ppm	ASTM D5185m >125	32	16	22
Tin	ppm	ASTM D5185m >80	▲ 128	22	8
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 0	7	0	1
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 5	1	0	<1
Calcium	ppm	ASTM D5185m 50	42	43	43
Phosphorus	ppm	ASTM D5185m 330	320	327	337
Zinc	ppm	ASTM D5185m 420	378	432	435
Sulfur	ppm	ASTM D5185m 3100	2646	2582	2788

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	8	2	2
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	<1	<1	1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	---	▲ 80209	▲ 57923
Particles >6µm	ASTM D7647	>2500	---	▲ 6699	▲ 5825
Particles >14µm	ASTM D7647	>160	---	147	▲ 242
Particles >21µm	ASTM D7647	>40	---	30	46
Particles >38µm	ASTM D7647	>10	---	1	3
Particles >71µm	ASTM D7647	>3	---	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/14	---	▲ 24/20/14	▲ 23/20/15



OIL ANALYSIS REPORT

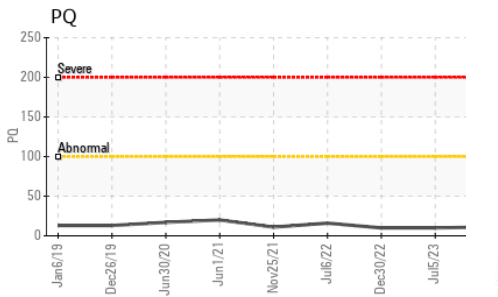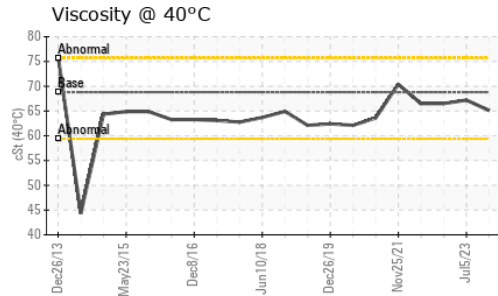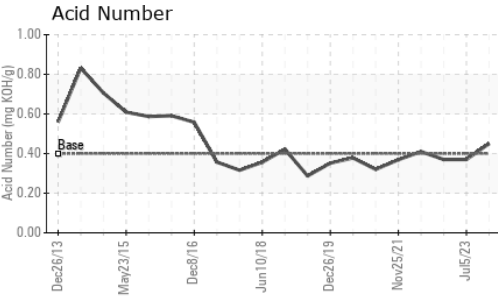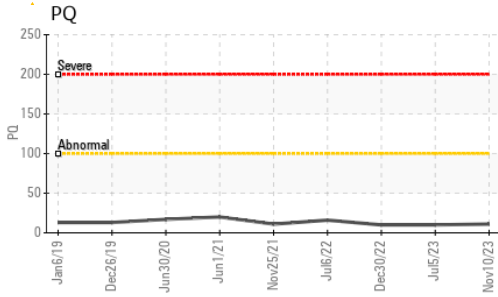


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.40	0.45	0.37	0.37





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.8	65.1	67.2	66.5

SAMPLE IMAGES

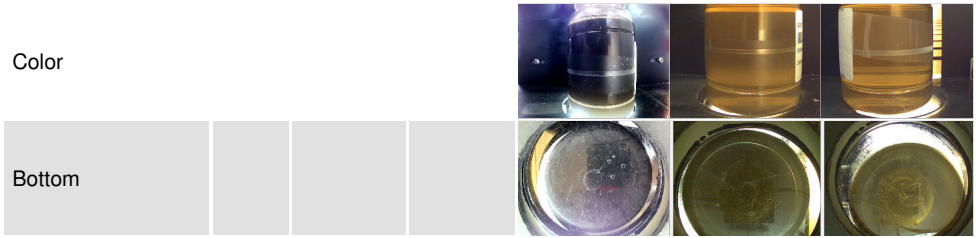

GRAPHS

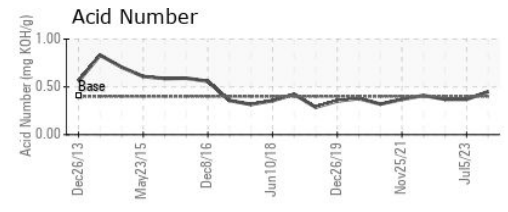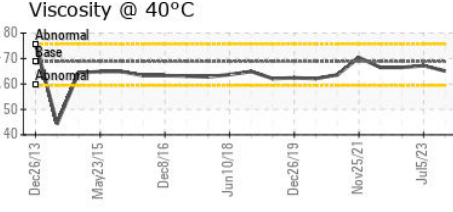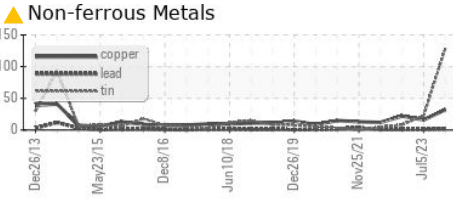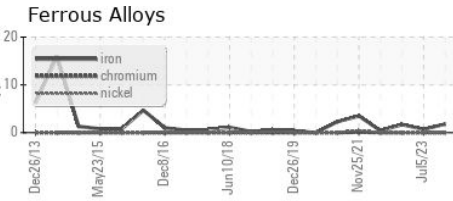

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0838860 **Received** : 16 Nov 2023
Lab Number : **06009534** **Diagnosed** : 20 Nov 2023
Unique Number : 10743296 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

BRIDGESTONE FIRESTONE - DES MOINES
 4600 NW 2ND AVE
 DES MOINES, IA
 US 50313
 Contact: SCOTT CARTER
 CarterScottA@FirestoneAg.com
 T: x:
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)