




OIL ANALYSIS REPORT

Sample Rating Trend

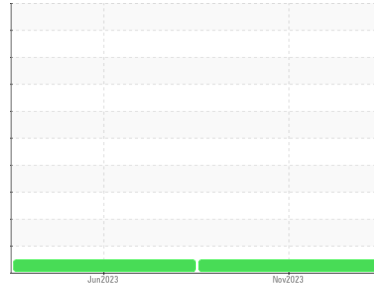

NORMAL



Machine Id
D-235

Component
Hydraulic System

Fluid
JOHN DEERE HYDRAU (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0828500	WC0828471	---
Sample Date	Client Info		15 Nov 2023	15 Jun 2023	---
Machine Age	hrs	Client Info	1140	545	---
Oil Age	hrs	Client Info	1140	545	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	6	4	---
Chromium	ppm	ASTM D5185m >10	<1	<1	---
Nickel	ppm	ASTM D5185m >10	<1	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	<1	0	---
Lead	ppm	ASTM D5185m >10	<1	<1	---
Copper	ppm	ASTM D5185m >75	4	3	---
Tin	ppm	ASTM D5185m >10	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	7	2	---
Molybdenum	ppm	ASTM D5185m	0	<1	---
Manganese	ppm	ASTM D5185m	0	0	---
Magnesium	ppm	ASTM D5185m	1	1	---
Calcium	ppm	ASTM D5185m 87	73	101	---
Phosphorus	ppm	ASTM D5185m 727	594	656	---
Zinc	ppm	ASTM D5185m 900	788	878	---
Sulfur	ppm	ASTM D5185m 1500	1698	1971	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	2	---
Sodium	ppm	ASTM D5185m	0	0	---
Potassium	ppm	ASTM D5185m >20	2	2	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	485	736	---
Particles >6µm	ASTM D7647	>1300	123	217	---
Particles >14µm	ASTM D7647	>160	13	27	---
Particles >21µm	ASTM D7647	>40	3	11	---
Particles >38µm	ASTM D7647	>10	0	1	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	16/14/11	17/15/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.69	0.71	---




OIL ANALYSIS REPORT

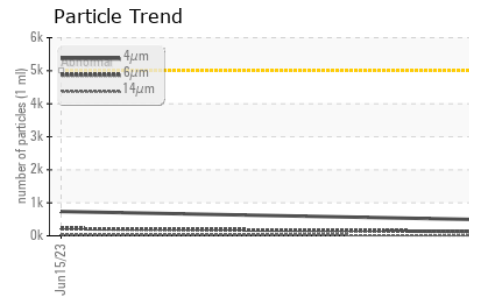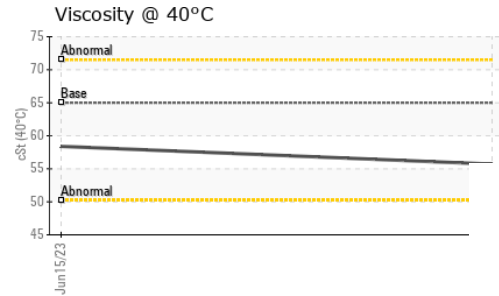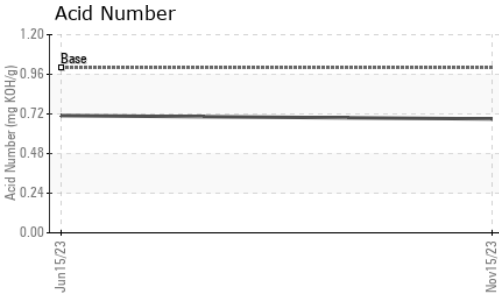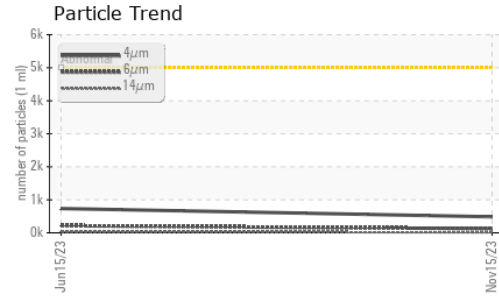






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	55.7	58.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

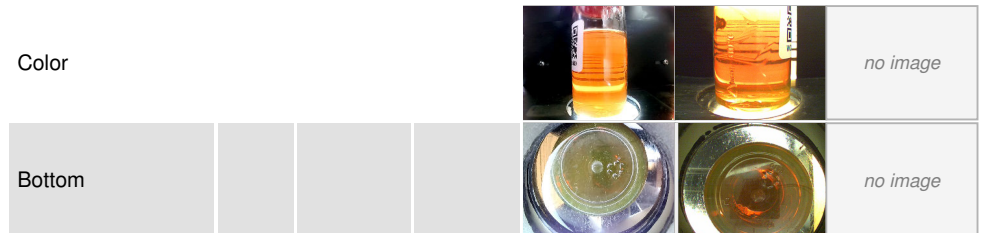

GRAPHS

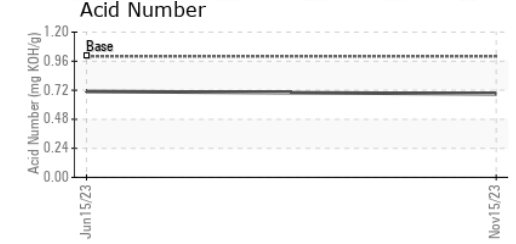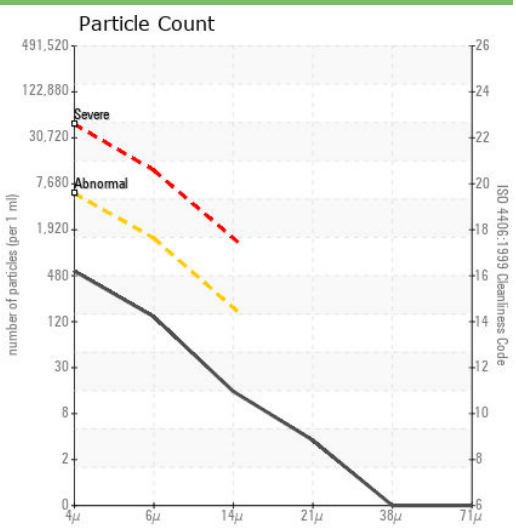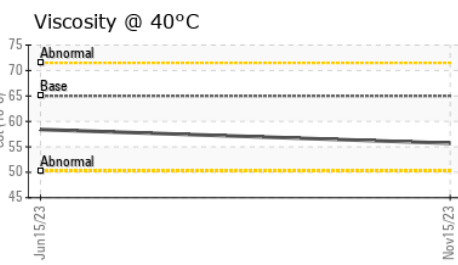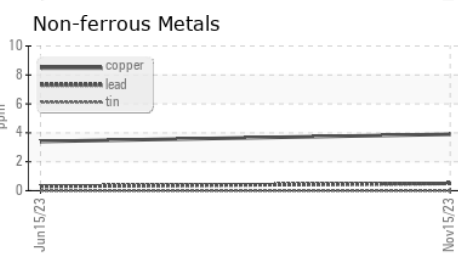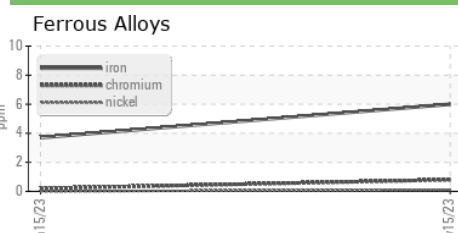

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0828500 **Received** : 16 Nov 2023
Lab Number : 06009600 **Diagnosed** : 17 Nov 2023
Unique Number : 10743362 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PrtCount)

DUKE LAZZARA
 4201 FAYETTEVILLE RD
 RALEIGH, NC
 US 27603
 Contact: NICK DIXON
 NICK.DIXON@DUKELAZZAM.COM
 T: (919)760-7797
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)