


OIL ANALYSIS REPORT

MP-101 [10023680592] B71457 - VACUUM PUMP BUSCH RA0630 SOUTH RETAIL BACON B71457 (S/N USM121330077)

Component Vacuum Pump

Fluid

PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)



Sample Rating Trend





NORMAL


DIAGNOSIS	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		WC0856070	WC0842519	WC0683803
We recommend you service the filters on this	Sample Date		Client Info		10 Nov 2023	17 Sep 2023	20 Jun 2023
component. Resample at the next service interval to	Machine Age	hrs	Client Info		0	0	0
monitor.	Oil Age	hrs	Client Info		0	0	0
Wear	Oil Changed		Client Info		N/A	Not Changd	N/A
All component wear rates are normal.	Sample Status				NORMAL	NORMAL	NORMAL
Contamination There is a high amount of particulates present in	WEAR METALS		method	limit/base	current	history1	history2
the oil.	Iron	ppm	ASTM D5185m	>20	2	0	2
Fluid Condition	Chromium	ppm	ASTM D5185m	>20	0	0	0
The AN level is acceptable for this fluid. The	Nickel	ppm	ASTM D5185m	>20	0	0	<1
condition of the oil is suitable for further service.	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m	>20	<1	0	<1
	Lead	ppm	ASTM D5185m	>20	0	0	0
	Copper	ppm	ASTM D5185m	>20	0	0	0
	Tin	ppm	ASTM D5185m	>20	0	0	0
	Vanadium	ppm	ASTM D5185m		0	0	0
	Cadmium	ppm	ASTM D5185m		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		0	0	0
	Barium	ppm	ASTM D5185m		7	0	0
	Molybdenum	ppm	ASTM D5185m		0	0	0
	Manganese	ppm	ASTM D5185m		0	0	<1
	Magnesium	ppm	ASTM D5185m		<1	3	0
	Calcium	ppm	ASTM D5185m		1	3	0
	Phosphorus	ppm	ASTM D5185m		468	408	189
	Zinc	ppm	ASTM D5185m		3	12	0
	Sulfur	ppm	ASTM D5185m		1332	1023	654
	CONTAMINANTS	6	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>15	8	4	6
	Sodium	ppm	ASTM D5185m		0	<1	1
	Potassium	ppm	ASTM D5185m	>20	1	<1	<1
		ppm		200	-		
	FLUID CLEANLIN		method	limit/base	current	history1	history2
	FLUID CLEANLIN Particles >4µm			limit/base		history1 3621	history2 9806
			method	limit/base >10000	current		
	Particles >4µm		method ASTM D7647	limit/base >10000 >2500	current 676	3621	9806
	Particles >4μm Particles >6μm		method ASTM D7647 ASTM D7647	limit/base >10000 >2500 >320	current 676 175	3621 761	9806 1249
	Particles >4µm Particles >6µm Particles >14µm		method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >320 >80	current 676 175 12	3621 761 46	9806 1249 23
	Particles >4μm Particles >6μm Particles >14μm Particles >21μm		method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >320 >80 >20	current 676 175 12 3	3621 761 46 11	9806 1249 23 7
	Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm		method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >320 >80 >20 >4	current 676 175 12 3 0	3621 761 46 11 1	9806 1249 23 7 1
	Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	IESS	method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >10000 >2500 >320 >80 >20 >4	Current 676 175 12 3 0 0	3621 761 46 11 1 0	9806 1249 23 7 1 0



OIL ANALYSIS REPORT

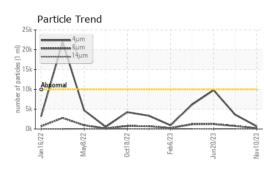


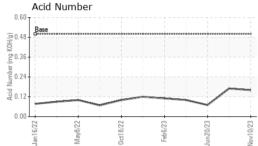

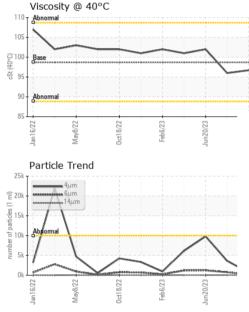

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.7	96.7	96.0	102
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

ottom

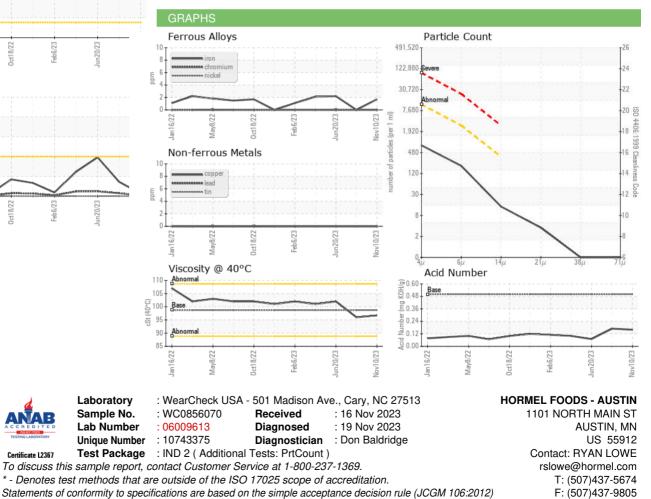

Contact/Location: RYAN LOWE - HORAUS