

# **OIL ANALYSIS REPORT**

## KAESER BSD 50T 5898342 (S/N 1326) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

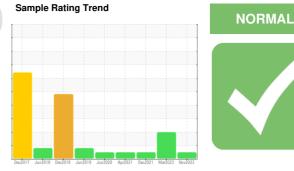



		Dec2017 Jur	2018 Dec2018 Jun2019	Jun2020 Apr2021 Dec2021 Mar20	23 Nov2023	
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009121	KCPA001545	KCP43616
Sample Date		Client Info		06 Nov 2023	22 Mar 2023	03 Dec 2021
Machine Age	hrs	Client Info		49879	44902	34697
Oil Age	hrs	Client Info		0	0	5339
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	8	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	7	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	2	0
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		18	2	2
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		15416	13595	12844
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	4	2
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.05	0.00	0.008	0.005
ppm Water	ppm	ASTM D6304	>500	0.00	81.1	57.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1380	7288	264
Particles >6µm		ASTM D7647	>1300	403	<u> </u>	78
Particles >14µm		ASTM D7647	>80	31	<b>2</b> 99	4
Particles >21µm		ASTM D7647	>20	8	<b>1</b> 19	1
Particles >38µm		ASTM D7647	>4	0	<b></b> 7	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	<b>2</b> 0/18/15	13/9
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.34 0.42 0.345


Report Id: LAMDUN [WUSCAR] 06009668 (Generated: 11/19/2023 14:55:12) Rev: 1


Contact/Location: SERVICE MANAGER ? - LAMDUN



# **OIL ANALYSIS REPORT**

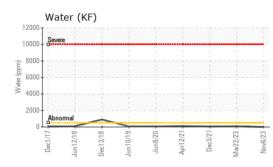


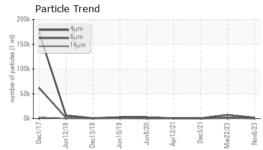

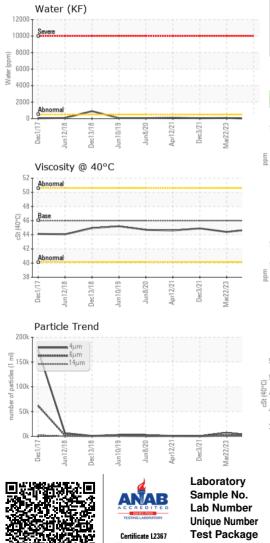

		ام م الدم میں	line it //e e e e		le le terre de la	la i at a muQ
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.8	44.4	44.9
SAMPLE IMAGES m		method	limit/base	current	history1	history2
Color						
					1100	

Bottom

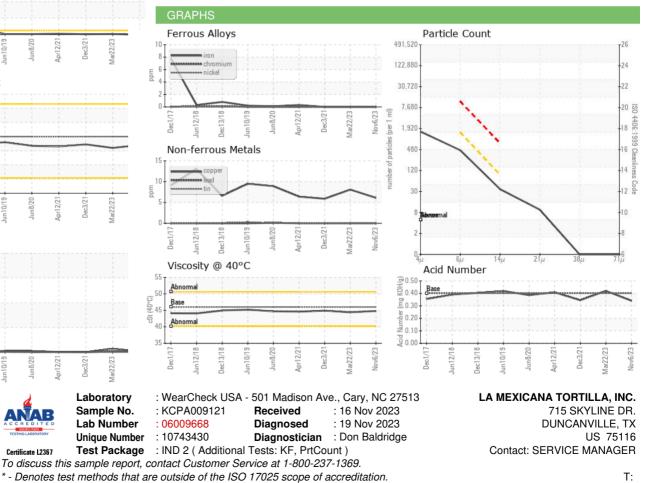

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: