




# OIL ANALYSIS REPORT

Sample Rating Trend

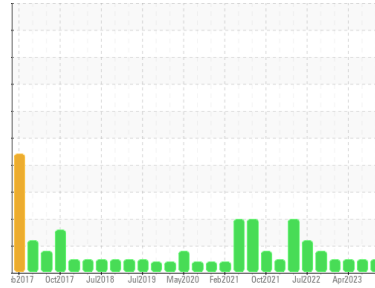

**NORMAL**



Area  
**PLATE FREEZER**  
 Machine Id  
**PLATE FRZR 2-4**

Component  
**Hydraulic System**  
 Fluid  
**LUBRIPLATE L0867-062 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USP0003661</b>	USP0000575	USP248830
Sample Date	Client Info		<b>15 Nov 2023</b>	19 Aug 2023	19 Apr 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>2</b>	3	3
Chromium	ppm	ASTM D5185m >20	<b>5</b>	4	4
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>11</b>	10	11
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>89</b>	85	85
Barium	ppm	ASTM D5185m	<b>3</b>	3	2
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>1</b>	4	4
Calcium	ppm	ASTM D5185m	<b>100</b>	95	93
Phosphorus	ppm	ASTM D5185m	<b>216</b>	215	211
Zinc	ppm	ASTM D5185m	<b>18</b>	18	15
Sulfur	ppm	ASTM D5185m	<b>1096</b>	1128	1173

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>2</b>	1	1
Sodium	ppm	ASTM D5185m	<b>3</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Water	%	ASTM D6304 >0.05	<b>0.017</b>	0.034	0.026
ppm Water	ppm	ASTM D6304 >500	<b>174.3</b>	341.7	269.1






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>3139</b>	4057	3990
Particles >6µm	ASTM D7647	>1300	<b>156</b>	615	846
Particles >14µm	ASTM D7647	>160	<b>12</b>	83	116
Particles >21µm	ASTM D7647	>40	<b>5</b>	36	35
Particles >38µm	ASTM D7647	>10	<b>1</b>	3	3
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/14/11</b>	19/16/14	19/17/14

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.06</b>	1.00	1.00

# OIL ANALYSIS REPORT

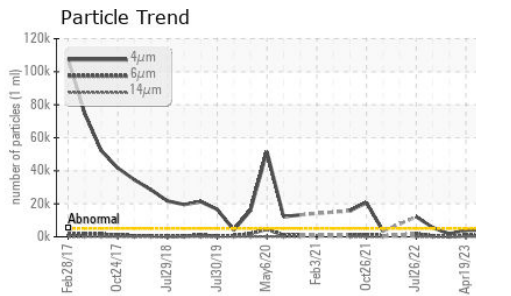
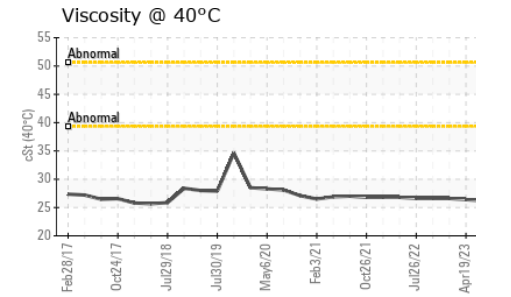
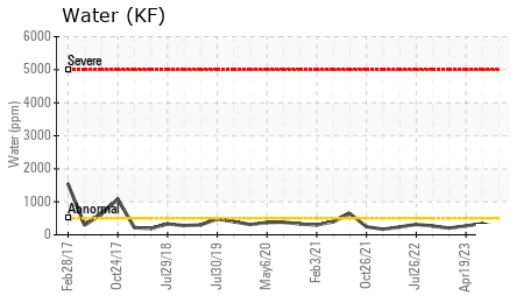
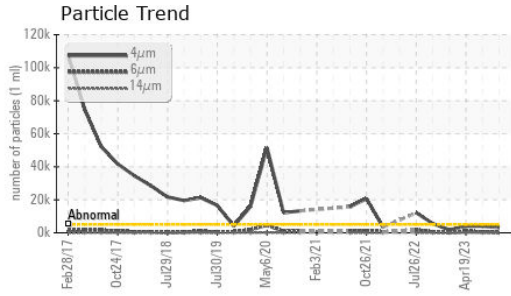
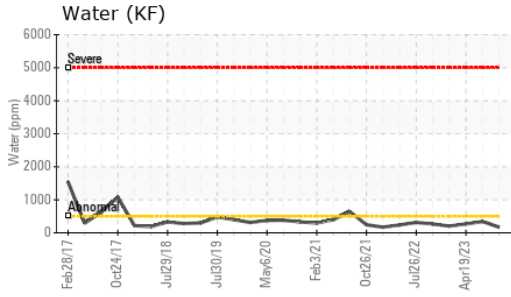


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	26.5	26.2	26.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

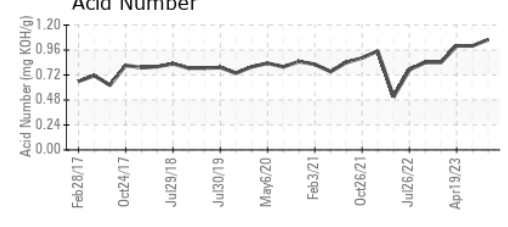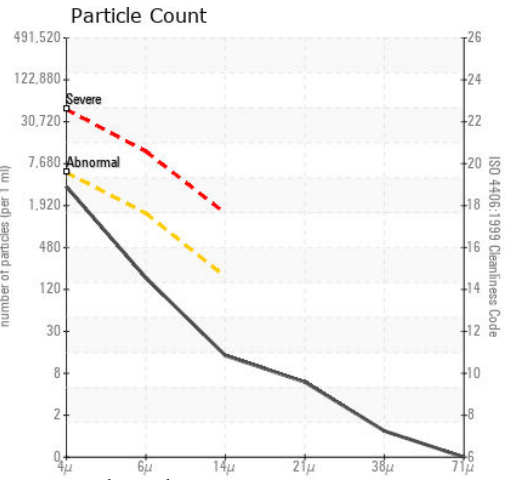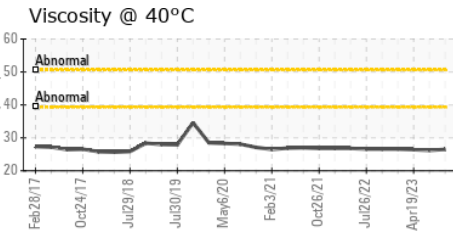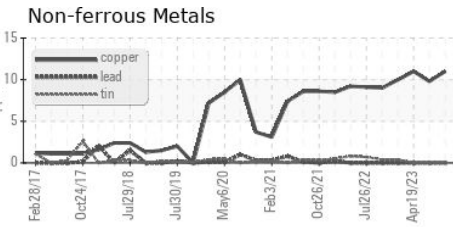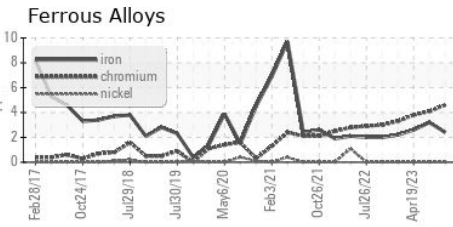

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0003661 **Received** : 16 Nov 2023  
**Lab Number** : 06009694 **Diagnosed** : 17 Nov 2023  
**Unique Number** : 10743456 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**CONAGRA FROZEN FOODS CO**  
 RUSSELLVILLE, AR  
 US  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: