

# **OIL ANALYSIS REPORT**

## Area [1854939] PD01CA02-01 - FES COMPRESSOR 1 (S/N 13L144MS3) Component

## **Refrigeration Compressor** CAMCO 717 HT (25 GAL)

### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

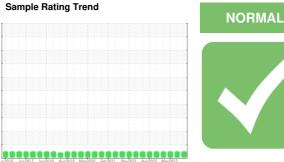






SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0869432	WC0817544	WC0801279
Sample Date		Client Info		11 Nov 2023	11 Aug 2023	10 May 2023
Machine Age	hrs	Client Info		0	94626	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	18	14	12
Chromium	ppm	ASTM D5185m	>2	0	0	<1
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m		0	0	1
Vanadium	ppm	ASTM D5185m	24	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc		ASTM D5185m		1	<1	0
Sulfur	ppm ppm	ASTM D5185m		3	0	2
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m	>10	2	0	<1
	ppm		00			1
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water ppm Water	% ppm	ASTM D6304 ASTM D6304	>0.01	27.5	0.004 43.9	0.003 25.2
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2398		
Particles >6µm		ASTM D7647		621		
Particles >14µm		ASTM D7647 ASTM D7647	>320	31		
Particles >21µm		ASTM D7647 ASTM D7647		7		
		ASTM D7647 ASTM D7647	>20	0		
Particles >38µm				0		
Particles >71µm		ASTM D7647		-		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/12		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.007	0.015	0.015	0.016




# **OIL ANALYSIS REPORT**

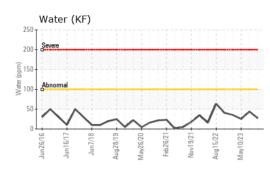

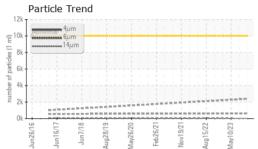

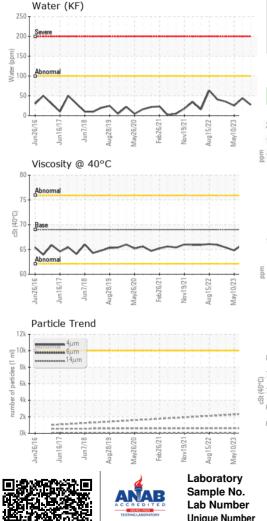

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69	65.1	66.0	64.8
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						
Bottom						

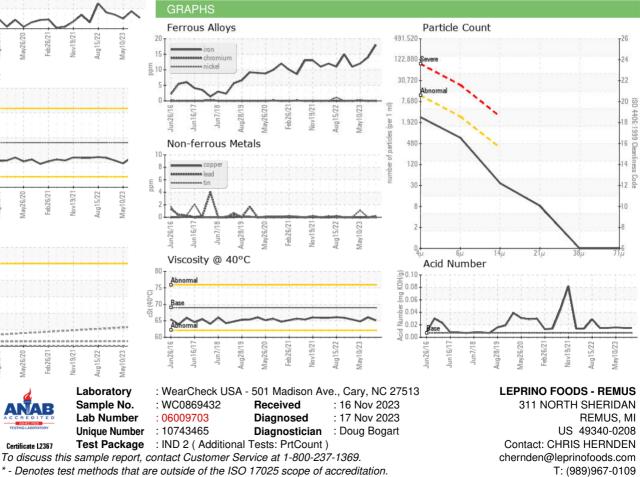

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: CHRIS HERNDEN - LEPREM

F: (989)967-8636