


OIL ANALYSIS REPORT

NOT GIVEN [CAE10-1953054] QUINCY CAI645253 - FORGEN LLC

Component

Compressor





Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Nov2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH06009738		
Sample Date		Client Info		02 Nov 2023		
Machine Age	hrs	Client Info		2273		
Oil Age	hrs	Client Info		1153		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		11		
Calcium	ppm	ASTM D5185m		9		
Phosphorus	ppm	ASTM D5185m		249		
Zinc	ppm	ASTM D5185m		122		
Sulfur	ppm	ASTM D5185m		1621		
CONTAMINANTS		mothed				
0111		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	limit/base >25	current	history1	history2
Sodium	ppm	ASTM D5185m		<1		
Sodium	ppm ppm ppm	ASTM D5185m ASTM D5185m	>25	<1 6		
Sodium Potassium FLUID DEGRADA	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	<1 6 0		
Sodium Potassium FLUID DEGRADA	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method	>25 >20	<1 6 0 current		
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045	>25 >20 limit/base	<1 6 0 current 0.20	 history1	 history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal	ppm ppm ppm ATION mg KOH/g	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method	>25 >20 limit/base	<1 6 0 current 0.20 current	history1	history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal	ppm ppm ppm TION mg KOH/g	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	>25 >20 limit/base limit/base	<1 6 0 current 0.20 current NONE	history1	history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate	ppm ppm ppm TION mg KOH/g	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	>25 >20 limit/base limit/base NONE NONE	<1 6 0 current 0.20 current NONE	history1 history1	history2 history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt	ppm ppm ppm TION mg KOH/g scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual	>25 >20 limit/base limit/base NONE NONE NONE	<1 6 0 current 0.20 current NONE NONE	history1 history1 history1	history2 history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris	ppm ppm ppm TION mg KOH/g scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual	>25 >20 limit/base NONE NONE NONE NONE	<1 6 0 current 0.20 current NONE NONE NONE NONE	 history1 history1	history2 history2
Acid Number (AN)	ppm ppm ppm scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>25 >20 limit/base NONE NONE NONE NONE NONE NONE	<1 6 0 current 0.20 current NONE NONE NONE NONE NONE NONE NONE	history1 history1	history2 history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm ppm ppm TION mg KOH/g scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>25 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	<1 6 0 current 0.20 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2
Sodium Potassium FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm ppm ppm ppm scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual	>25 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	<1 6 0 current 0.20 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2



OIL ANALYSIS REPORT

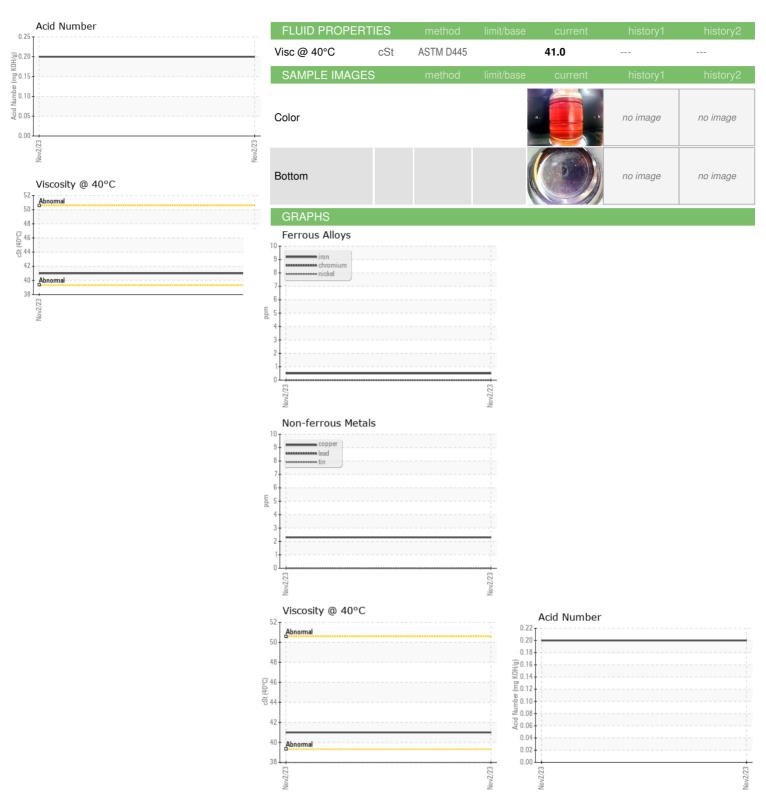





Laboratory Sample No. Lab Number

: UCH06009738 : 06009738 Unique Number : 10743500 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 16 Nov 2023 Diagnosed : 17 Nov 2023

Diagnostician : Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **CISCO AIR SYSTEMS**

214 27TH ST SACRAMENTO, CA US 95816

Contact: BARRY FRKOVICH barryfrkovich@ciscoair.com

T: (916)444-2525

F: x: