


PROBLEM SUMMARY


Area [19990] 40-157


Component **Diesel Engine**

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

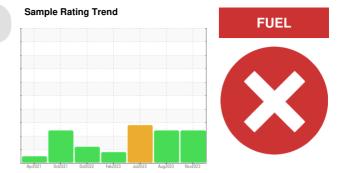

COMPONENT CONDITION SUMMARY

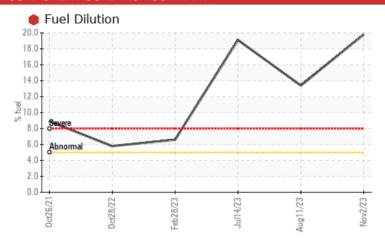

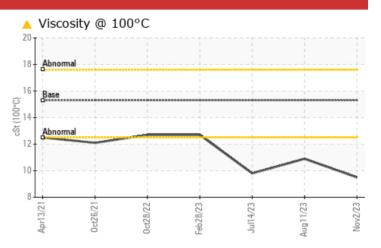

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS												
Sample Status				SEVERE	SEVERE	SEVERE						
Fuel	%	ASTM D3524	>5	19.8	13.4	• 19.1						
Visc @ 100°C	cSt	ASTM D445	15.3	A 9.5	△ 10.9	9.8						

Customer Id: MANTUL **Sample No.:** WC0836115 Lab Number: 06010092 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

Action Status Date Done By Description Resample --- ? We recommend an early resample to monitor this condition. Check Fuel/injector System --- ? We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

11 Aug 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.



14 Jul 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report

28 Feb 2023 Diag: Angela Borella

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. The oil is no longer serviceable due to the presence of contaminants.





OIL ANALYSIS REPORT

Area [19990] 40-157 Component

Diesel Engine

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

(GAL)		Apr2021	Oct2021 Oct2022	Feb 2023 Jul 2023 Aug 2023	Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0836115	WC0738903	WC0818684
Sample Date		Client Info		02 Nov 2023	11 Aug 2023	14 Jul 2023
Machine Age	hrs	Client Info		5580	5304	5304
Oil Age	hrs	Client Info		276	5304	585
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	SEVERE	SEVERE
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	18	7	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	1	<1
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	0	0	1
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	85	26	53	43
Barium	10 10 100	ASTM D5185m		0	0	0
	ppm					
Molybdenum	ppm	ASTM D5185m		0	0	2
•		ASTM D5185m ASTM D5185m		0 <1	0 <1	2 <1
Manganese	ppm		350			
Manganese Magnesium	ppm	ASTM D5185m ASTM D5185m	350 1800	<1	<1	<1
Manganese Magnesium Calcium	ppm ppm	ASTM D5185m ASTM D5185m		<1 561	<1 605	<1 590
Manganese Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	1800	<1 561 1007	<1 605 1059	<1 590 1096
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1800 1000	<1 561 1007 831	<1 605 1059 854	<1 590 1096 830
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1800 1000 1100	<1 561 1007 831 963	<1 605 1059 854 1013	<1 590 1096 830 984
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1800 1000 1100 3500 limit/base	<1 561 1007 831 963 2648	<1 605 1059 854 1013 3540	<1 590 1096 830 984 3360
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	1800 1000 1100 3500 limit/base	<1 561 1007 831 963 2648	<1 605 1059 854 1013 3540 history1	<1 590 1096 830 984 3360 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m	1800 1000 1100 3500 limit/base	<1 561 1007 831 963 2648 current	<1 605 1059 854 1013 3540 history1	<1 590 1096 830 984 3360 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	1800 1000 1100 3500 limit/base >25	<1 561 1007 831 963 2648 current 3	<1 605 1059 854 1013 3540 history1 3 2	<1 590 1096 830 984 3360 history2 4 3
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1800 1000 1100 3500 limit/base >25 >20	<1 561 1007 831 963 2648 current 3 0 2	<1 605 1059 854 1013 3540 history1 3 2 2	<1 590 1096 830 984 3360 history2 4 3 2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1800 1000 1100 3500 limit/base >25 >20 >5	<1 561 1007 831 963 2648 current 3 0 2	<1 605 1059 854 1013 3540 history1 3 2 2 1 13.4	<1 590 1096 830 984 3360 history2 4 3 2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	1800 1000 1100 3500 limit/base >25 >20 >5	<1 561 1007 831 963 2648 current 3 0 2 19.8 current	<1 605 1059 854 1013 3540 history1 3 2 2 13.4 history1	<1 590 1096 830 984 3360 history2 4 3 2 19.1 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D3524	1800 1000 1100 3500 limit/base >25 >20 >5 limit/base >3	<1 561 1007 831 963 2648 current 3 0 2 19.8 current 0.7	<1 605 1059 854 1013 3540 history1 3 2 2 13.4 history1 0.3	<1 590 1096 830 984 3360 history2 4 3 2 19.1 history2 0.4
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844	1800 1000 1100 3500 limit/base >25 >20 >5 limit/base	<1 561 1007 831 963 2648 current 3 0 2 19.8 current 0.7 11.3	<1 605 1059 854 1013 3540 history1 3 2 2 13.4 history1 0.3 8.8	<1 590 1096 830 984 3360 history2 4 3 2 19.1 history2 0.4 9.9
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D76124	1800 1000 1100 3500 limit/base >25 >20 >5 limit/base >3 >20 >3	<1 561 1007 831 963 2648 current 3 0 2 19.8 current 0.7 11.3 24.9	<1 605 1059 854 1013 3540 history1 3 2 2 13.4 history1 0.3 8.8 19.5	<1 590 1096 830 984 3360 history2 4 3 2 19.1 history2 0.4 9.9 20.1



OIL ANALYSIS REPORT

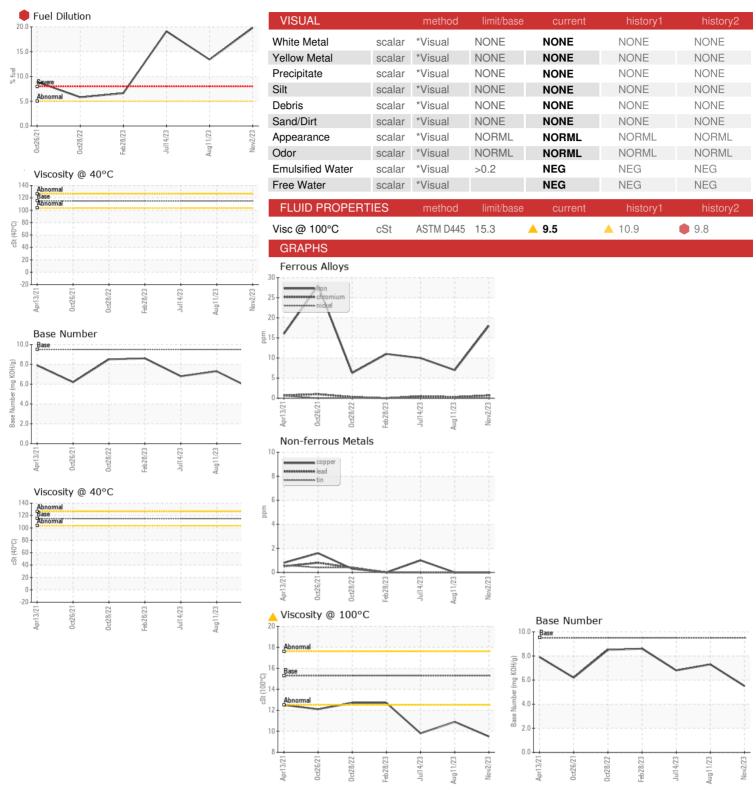





Certificate L2367

Laboratory Sample No. **Unique Number**

Lab Number

: WC0836115

: 06010092 : 10749236

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 16 Nov 2023 Received Diagnosed : 20 Nov 2023

Diagnostician : Don Baldridge Test Package : CONST (Additional Tests: KV40, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MANHATTAN ROAD AND BRIDGE

5601 S 122ND E AVE TULSA, OK US 74146

Contact: BEN CALDWELL kevin.marson@wearcheck.com

T: (918)728-5749 F: