




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

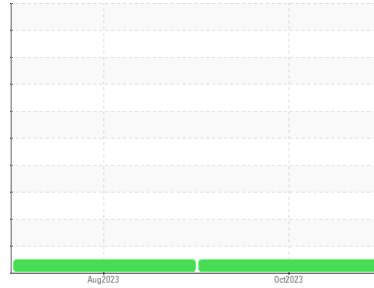

Area

**Ewing Hauling**  
Machine Id  
**PETERBILT 2623**

Component

**Diesel Engine**

Fluid

**GIBRALTAR 15W/40 SUPER S-3 LX (11)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0863221</b>	WC0830854	---
Sample Date	Client Info			<b>31 Oct 2023</b>	11 Aug 2023	---
Machine Age	hrs	Client Info		<b>3250</b>	2715	---
Oil Age	hrs	Client Info		<b>450</b>	150	---
Oil Changed	Client Info			<b>Changed</b>	Filtered	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>5</b>	13	---
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	6	---
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>85	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>4</b>	10	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	66	<b>57</b>	67	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1000	<b>739</b>	823	---
Calcium	ppm	ASTM D5185m	1050	<b>1342</b>	1354	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1032</b>	1075	---
Zinc	ppm	ASTM D5185m	1270	<b>1229</b>	1277	---
Sulfur	ppm	ASTM D5185m		<b>3210</b>	3984	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>3</b>	4	---
Sodium	ppm	ASTM D5185m		<b>0</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	8	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	7.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.4</b>	18.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	13.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>8.2</b>	7.9	---











# OIL ANALYSIS REPORT

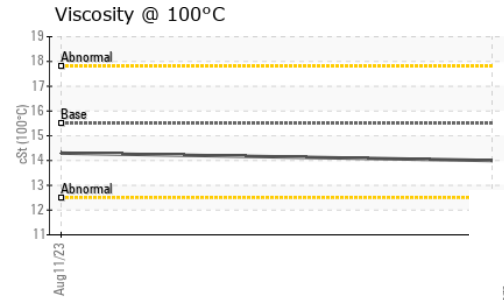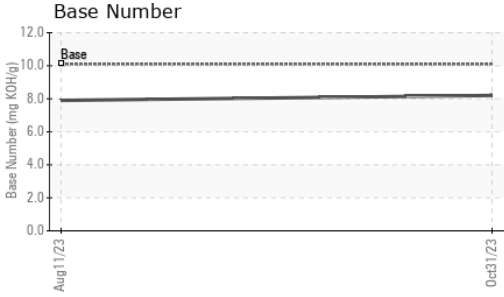

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.0</b>	14.3	---

## GRAPHS

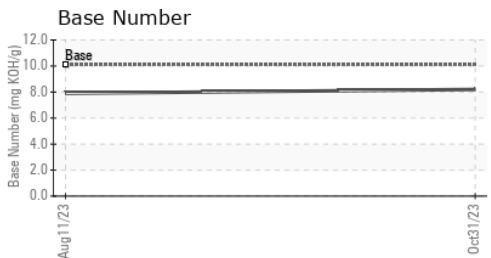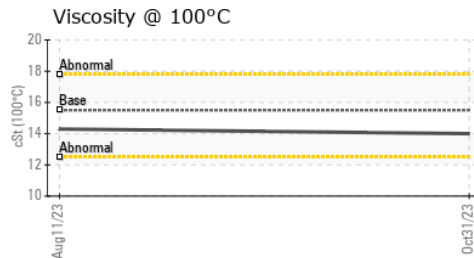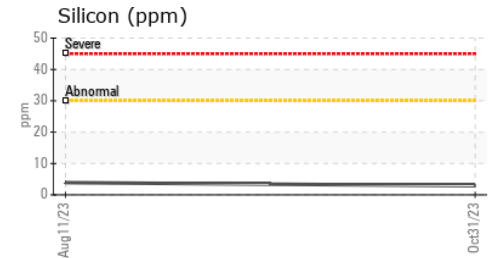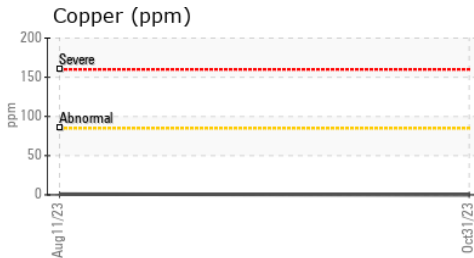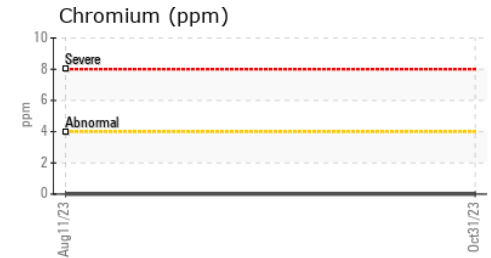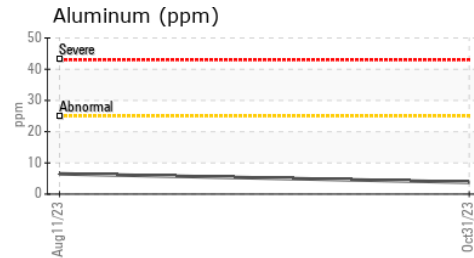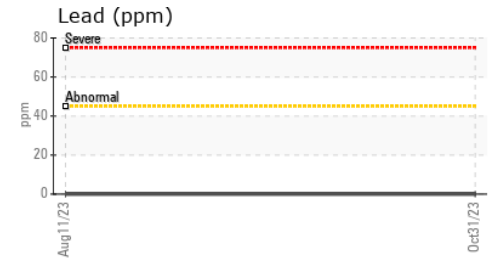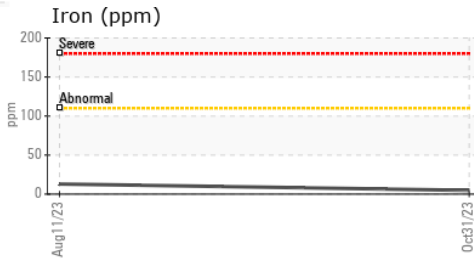

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0863221      **Received** : 16 Nov 2023  
**Lab Number** : **06010125**      **Diagnosed** : 17 Nov 2023  
**Unique Number** : 10749269      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**INTERSTATE WASTE-EWING**  
 432 STOKES AVENUE  
 EWING TOWNSHIP, NJ  
 US 08638  
 Contact: Carlos Evans  
 CEvans@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: