




OIL ANALYSIS REPORT

Sample Rating Trend

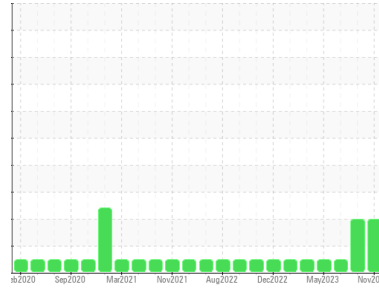

ISO



Area
RIG 5
Machine Id
HYUNDAI HL757-9A R5-LOADER NKL
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0013084	KL0012690	KL0011665
Sample Date	Client Info		03 Nov 2023	21 Jul 2023	09 Jun 2023
Machine Age	days	Client Info	45233	45120	45084
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ATTENTION	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	30	15	37
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	1	5
Lead	ppm	ASTM D5185m >40	0	3	<1
Copper	ppm	ASTM D5185m >330	2	▲ 192	3
Tin	ppm	ASTM D5185m >15	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	23	218	529
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	63	68	196
Manganese	ppm	ASTM D5185m	<1	1	<1
Magnesium	ppm	ASTM D5185m	922	375	951
Calcium	ppm	ASTM D5185m	1015	2005	2076
Phosphorus	ppm	ASTM D5185m	1036	804	1040
Zinc	ppm	ASTM D5185m	1204	1044	1229
Sulfur	ppm	ASTM D5185m	3614	3069	4546

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	7	15
Sodium	ppm	ASTM D5185m >50	6	1	3
Potassium	ppm	ASTM D5185m >20	0	3	2


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	2.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.5	12.8	6.3
Sulfation	Abs./1mm	*ASTM D7415 >30	18.6	26.8	22.9




OIL ANALYSIS REPORT


▲ Particle Trend

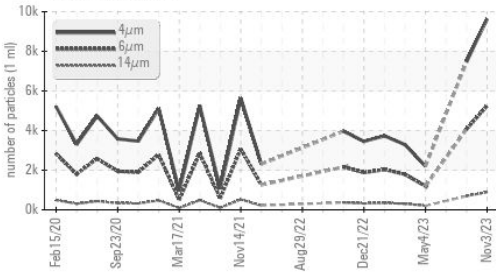


▲ Particle Trend

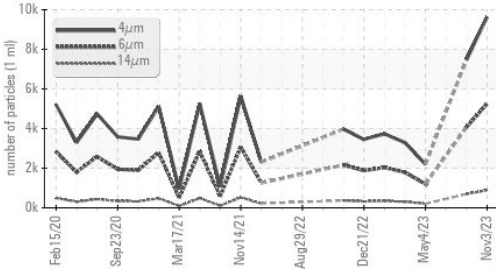

Base Number

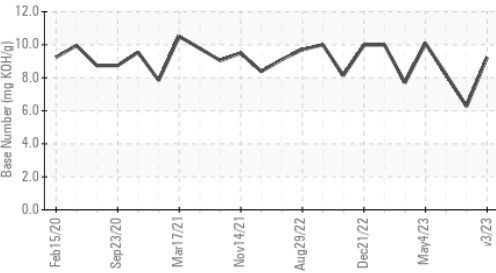

Viscosity @ 100°C

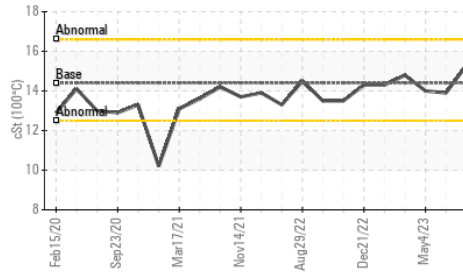

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		9631	7473	---
Particles >6µm	ASTM D7647	>5000	▲ 5246	4071	---
Particles >14µm	ASTM D7647	>640	▲ 893	▲ 693	---
Particles >21µm	ASTM D7647	>160	▲ 301	▲ 233	---
Particles >38µm	ASTM D7647	>40	▲ 46	36	---
Particles >71µm	ASTM D7647	>10	5	4	---
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 20/17	▲ 19/17	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	14.2	23.4	17.4
Base Number (BN)	mg KOH/g ASTM D2896		9.22	6.26	8.2

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	14.3	15.3	13.9

GRAPHS


Ferrous Alloys

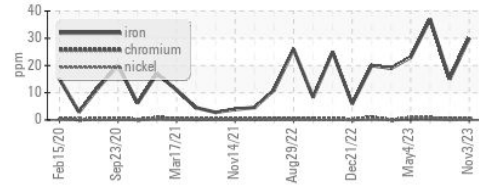


Non-ferrous Metals

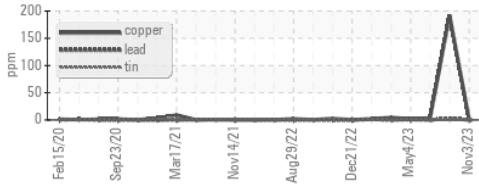


Viscosity @ 100°C

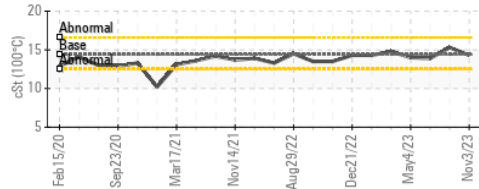

▲ Particle Count

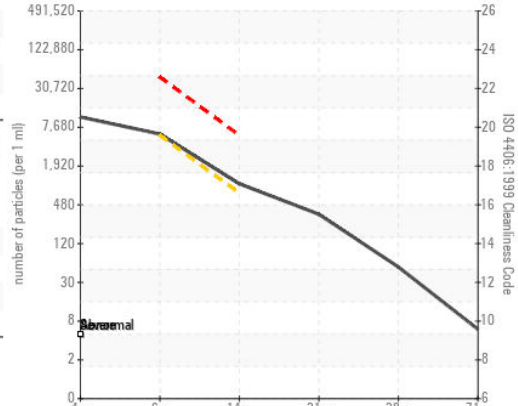

Base Number

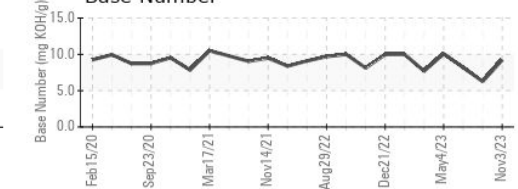

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013084 **Received** : 16 Nov 2023
Lab Number : **06010268** **Diagnosed** : 22 Nov 2023
Unique Number : 10749412 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

T: (780)955-5509

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)