




# OIL ANALYSIS REPORT

Sample Rating Trend

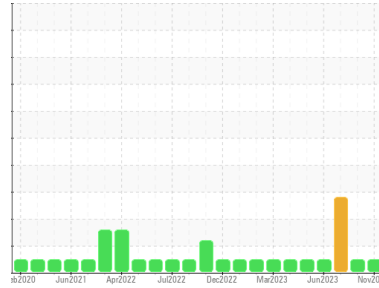

**NORMAL**



Area  
**RIG 4**  
Machine Id  
**R4-CHANGE SHACK NKL**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0013127</b>	KL0012977	KL0012761
Sample Date	Client Info		<b>03 Nov 2023</b>	13 Sep 2023	28 Jul 2023
Machine Age	days	Client Info	<b>45233</b>	45180	45134
Oil Age	days	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>7</b>	<1	5
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	7	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	0	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>337</b>	461	311
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>118</b>	130	137
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>651</b>	704	679
Calcium	ppm	ASTM D5185m	<b>1398</b>	1571	1613
Phosphorus	ppm	ASTM D5185m	<b>691</b>	725	697
Zinc	ppm	ASTM D5185m	<b>818</b>	876	870
Sulfur	ppm	ASTM D5185m	<b>2740</b>	2633	2645

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	7	6
Sodium	ppm	ASTM D5185m >50	<b>2</b>	<1	5
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.4</b>	4.3	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.3</b>	21.9	24.1




# OIL ANALYSIS REPORT


### Particle Trend

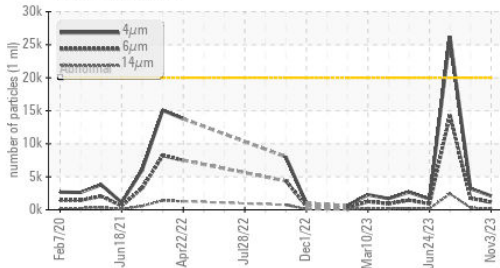


### Base Number

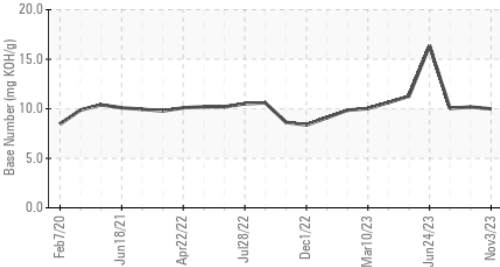

### Viscosity @ 100°C

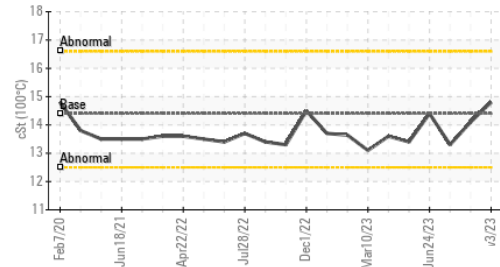

### Particle Trend

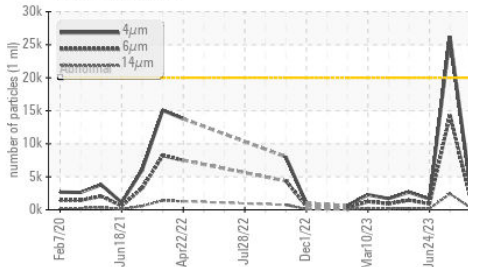

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>2114</b>	3210	▲ 26247
Particles >6µm	ASTM D7647	>5000	<b>1152</b>	1749	▲ 14298
Particles >14µm	ASTM D7647	>640	<b>196</b>	298	▲ 2433
Particles >21µm	ASTM D7647	>160	<b>66</b>	100	▲ 820
Particles >38µm	ASTM D7647	>40	<b>10</b>	15	▲ 127
Particles >71µm	ASTM D7647	>10	<b>1</b>	2	▲ 13
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>18/17/15</b>	19/18/15	▲ 22/21/18


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	<b>15.0</b>	14.8	18.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.99</b>	10.18	10.04

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.8</b>	14.1	13.3

### GRAPHS


#### Ferrous Alloys

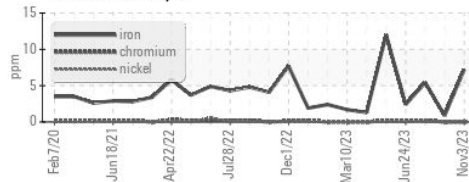


#### Non-ferrous Metals

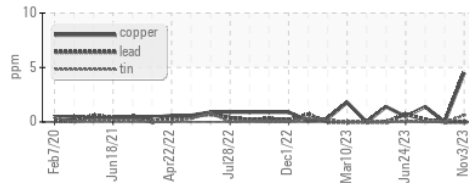


#### Viscosity @ 100°C

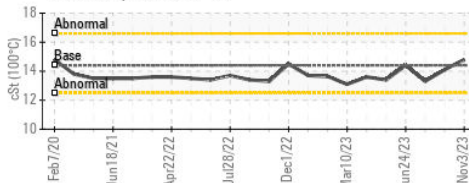

#### Particle Count

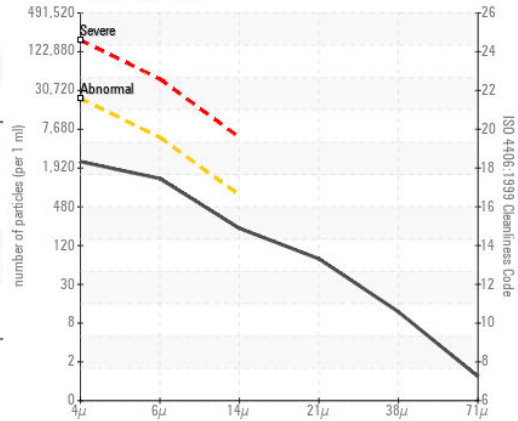

#### Base Number

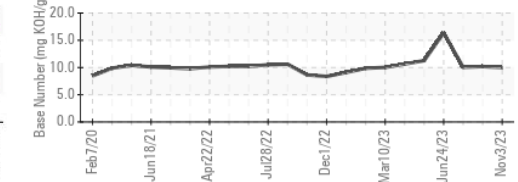

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013127 **Received** : 16 Nov 2023  
**Lab Number** : 06010270 **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10749414 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITADEL DRILLING**  
 7550 W 120  
 ODESSA, TX  
 US 79763

Contact: MIKE COMBDEN  
 mcombden@citadelldrilling.com

T: (780)955-5509

F: