




# OIL ANALYSIS REPORT



Area  
**RIG 5**  
Machine Id  
**CATERPILLAR 3512 R5-G-01 NKL**  
Component  
**Diesel Engine**  
Fluid  
**NOT GIVEN (--- GAL)**

Sample Rating Trend

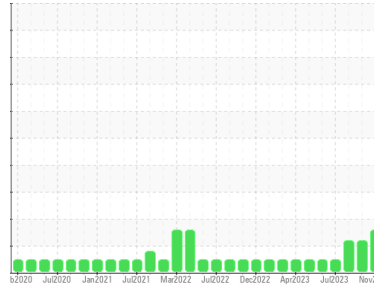

## DIAGNOSIS

- Recommendation**  
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
There is a moderate amount of particulates present in the oil.
- Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KL0013092</b>	KL0012992	KL0012485
Sample Date	Client Info	<b>03 Nov 2023</b>	29 Sep 2023	25 Aug 2023
Machine Age	days	<b>45233</b>	45196	45161
Oil Age	days	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ATTENTION</b>	ATTENTION	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>1</b>	5	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	1	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	6	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>15</b>	14	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>359</b>	338	348
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>120</b>	122	123
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>664</b>	603	663
Calcium	ppm ASTM D5185m	<b>1543</b>	1411	1587
Phosphorus	ppm ASTM D5185m	<b>736</b>	672	705
Zinc	ppm ASTM D5185m	<b>879</b>	808	848
Sulfur	ppm ASTM D5185m	<b>2619</b>	2661	3013

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	8	8
Sodium	ppm ASTM D5185m	<b>0</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	1


## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>5.7</b>	6.1	7.0
Sulfation	Abs.1mm *ASTM D7415 >30	<b>23.0</b>	22.4	23.3




# OIL ANALYSIS REPORT


▲ Particle Trend

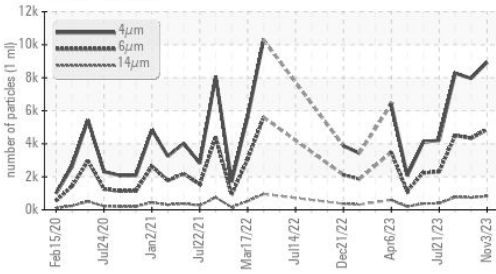


▲ Particle Trend

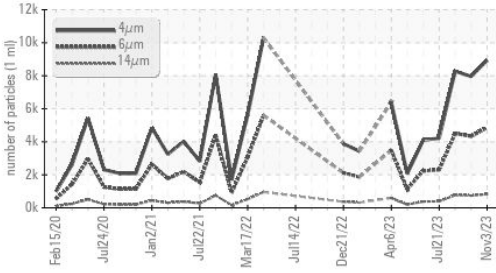

Base Number

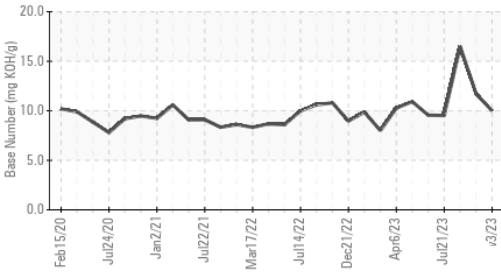

Viscosity @ 100°C

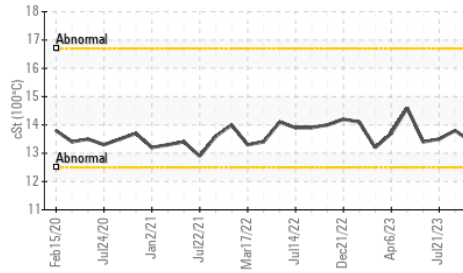

### FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>8926</b>	7960	8273
Particles >6µm	ASTM D7647 >5000	<b>4862</b>	4336	4507
Particles >14µm	ASTM D7647 >640	▲ <b>828</b>	▲ 738	▲ 767
Particles >21µm	ASTM D7647 >160	▲ <b>279</b>	▲ 249	▲ 258
Particles >38µm	ASTM D7647 >40	▲ <b>43</b>	38	40
Particles >71µm	ASTM D7647 >10	<b>4</b>	4	4
Oil Cleanliness	ISO 4406 (c) >19/16	▲ <b>19/17</b>	▲ 19/17	▲ 19/17

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation Abs/.1mm	*ASTM D7414 >25	<b>16.3</b>	16.0	16.9
Base Number (BN) mg KOH/g	ASTM D2896	<b>10.00</b>	11.70	16.48

### VISUAL


method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water scalar	*Visual	<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C cSt	ASTM D445	<b>13.8</b>	13.4	13.8

### GRAPHS


Ferrous Alloys

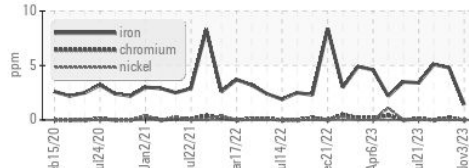


Non-ferrous Metals

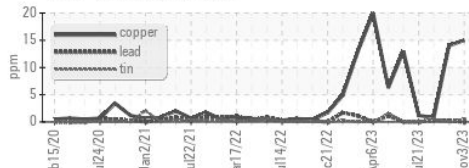


Viscosity @ 100°C

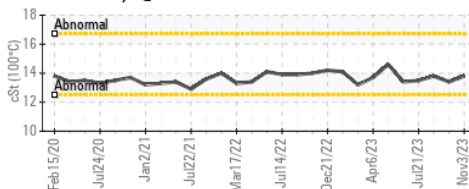

▲ Particle Count

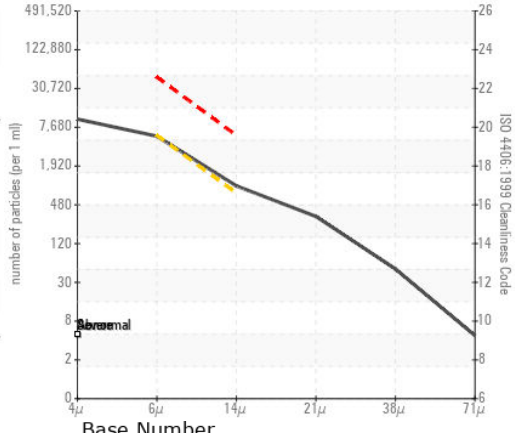

Base Number

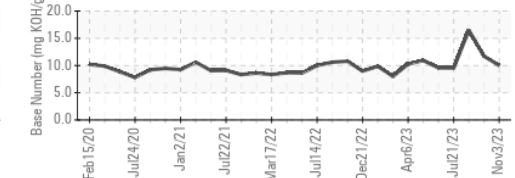

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013092 **Received** : 16 Nov 2023  
**Lab Number** : **06010274** **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10749418 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITADEL DRILLING**  
 7550 W 120  
 ODESSA, TX  
 US 79763

Contact: MIKE COMBDEN  
 mcombden@citadelldrilling.com

T: (780)955-5509

F: