




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

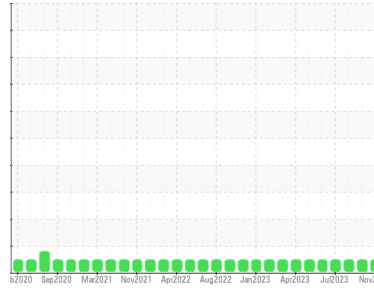

Area
RIG 5
 Machine Id
R5-CHANGE SHACK NKL
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0013085	KL0012986	KL0012478
Sample Date	Client Info			03 Nov 2023	29 Sep 2023	25 Aug 2023
Machine Age	days	Client Info		45233	45196	45161
Oil Age	days	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	20	28	18
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	4	<1
Lead	ppm	ASTM D5185m	>40	1	1	3
Copper	ppm	ASTM D5185m	>330	183	186	183
Tin	ppm	ASTM D5185m	>15	1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		172	168	205
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		61	64	64
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		343	320	353
Calcium	ppm	ASTM D5185m		1874	1696	1965
Phosphorus	ppm	ASTM D5185m		828	756	814
Zinc	ppm	ASTM D5185m		1039	977	1031
Sulfur	ppm	ASTM D5185m		3004	3207	3355

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	8	7
Sodium	ppm	ASTM D5185m	>50	5	8	4
Potassium	ppm	ASTM D5185m	>20	4	6	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	2.3	2.2	2.2
Nitration	Abs/cm	*ASTM D7624	>20	12.9	12.5	12.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.4	26.6	27.0



OIL ANALYSIS REPORT

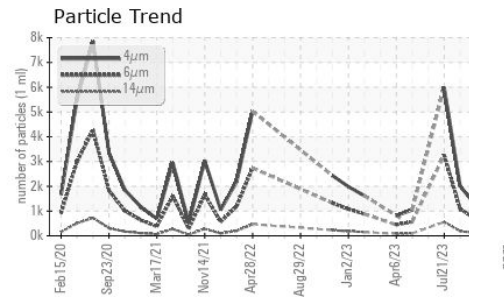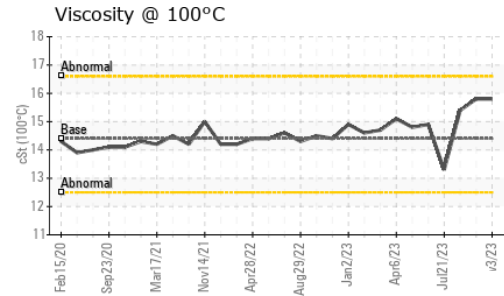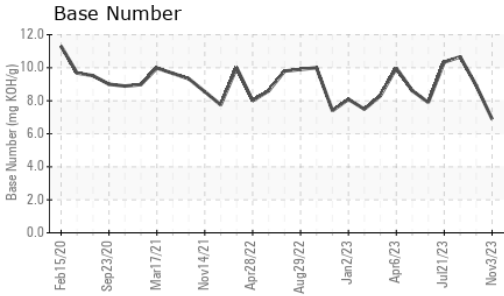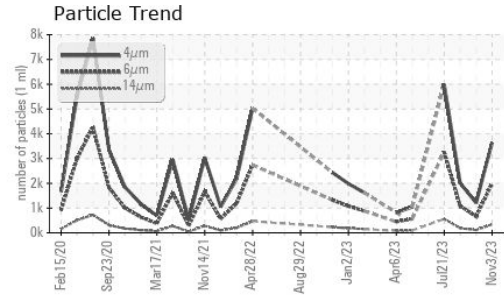






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		3636	1209	2007
Particles >6µm	ASTM D7647	>5000	1981	659	1093
Particles >14µm	ASTM D7647	>640	337	112	186
Particles >21µm	ASTM D7647	>160	114	38	63
Particles >38µm	ASTM D7647	>40	18	6	10
Particles >71µm	ASTM D7647	>10	2	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	18/16	17/14	17/15

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.9	22.9	23.6
Base Number (BN)	mg KOH/g	ASTM D2896		6.89	8.93	10.66

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	15.8	15.8	15.4

GRAPHS

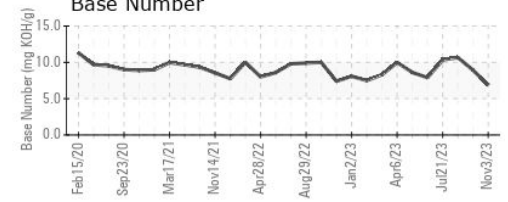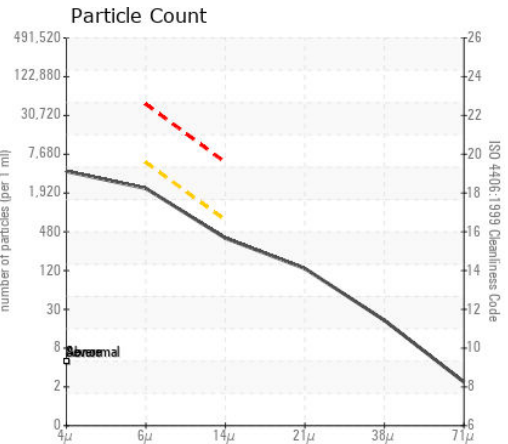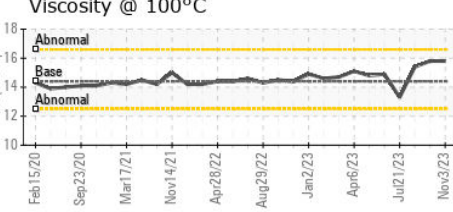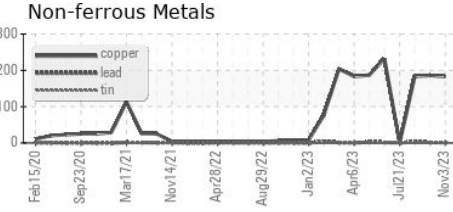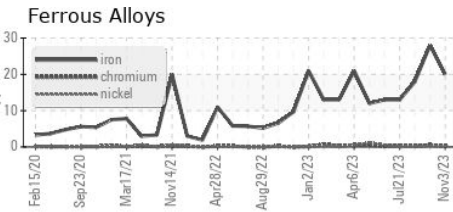

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013085 **Received** : 16 Nov 2023
Lab Number : 06010277 **Diagnosed** : 22 Nov 2023
Unique Number : 10749421 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763
 Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com
 T: (780)955-5509
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)