




# PROBLEM SUMMARY



Area  
**MINING**  
 Machine Id  
**ME-62 CATERPILLAR 336 CYBN20963**  
 Component  
**Diesel Engine**  
 Fluid  
**CAT DIESEL ENGINE OIL 15W40 (9 GAL)**

Sample Rating Trend

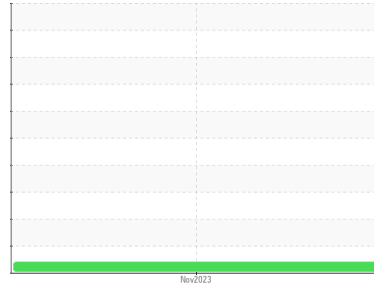


VISCOSITY



## COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

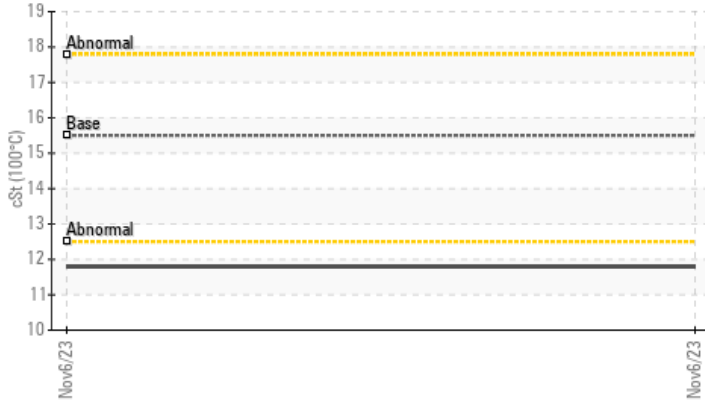

## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ATTENTION</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	▲ 11.8	---	---

Customer Id: COVCAMTN  
 Sample No.: WC0866093  
 Lab Number: 06010460  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Area  
**MINING**  
Machine Id  
**ME-62 CATERPILLAR 336 CYBN20963**  
Component  
**Diesel Engine**  
Fluid  
**CAT DIESEL ENGINE OIL 15W40 (9 GAL)**

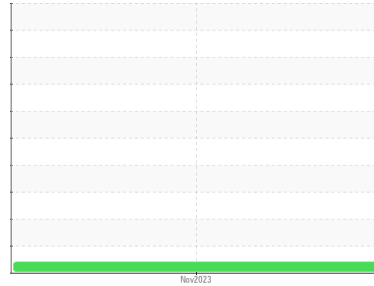

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0866093</b>	---	---
Sample Date	Client Info		<b>06 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>500</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>13</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>2</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>28</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>40</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>464</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1717</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>879</b>	---	---
Zinc	ppm	ASTM D5185m 1460	<b>1074</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>2565</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.5</b>	---	---

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.3</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 11.3	<b>10.0</b>	---	---







# OIL ANALYSIS REPORT

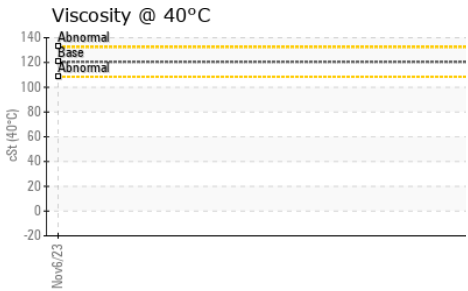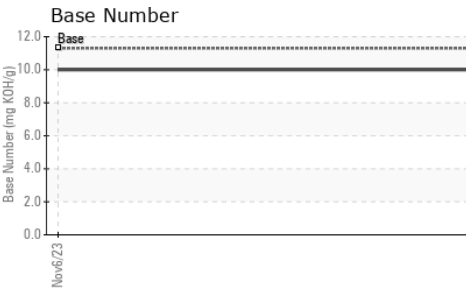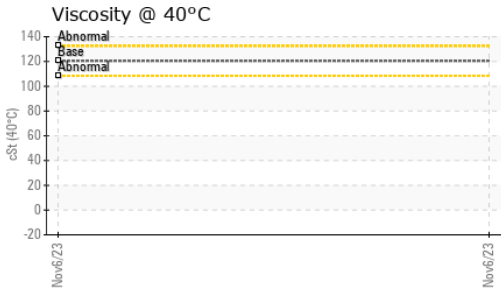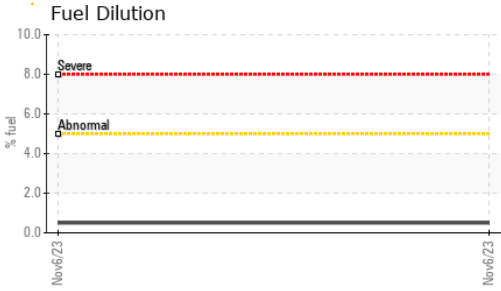

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>▲ 11.8</b>	---	---

### GRAPHS

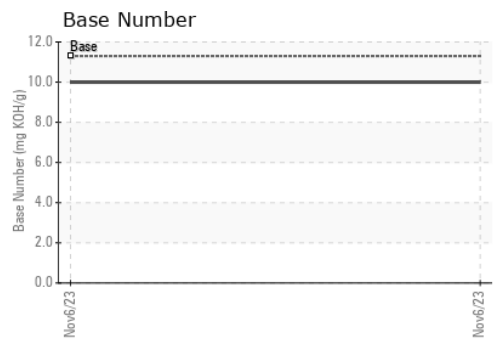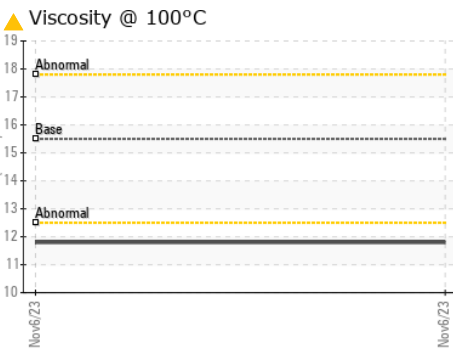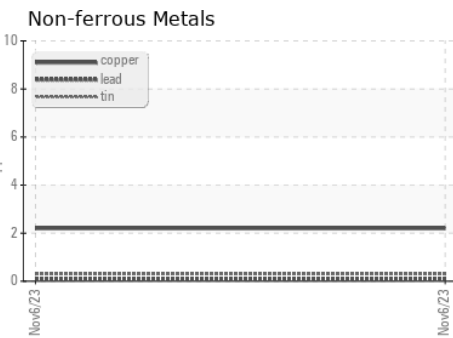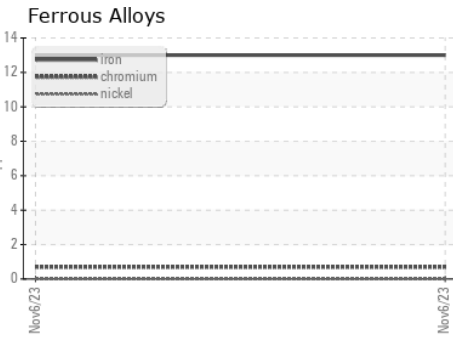

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0866093 **Received** : 17 Nov 2023  
**Lab Number** : 06010460 **Diagnosed** : 22 Nov 2023  
**Unique Number** : 10749604 **Diagnostician** : Jonathan Hester  
**Test Package** : CONST ( Additional Tests: FuelDilution, KV40, PercentFuel, TBN )

**COVIA - CAMDEN**  
 1700 SAND MILL RD  
 CAMDEN, TN  
 US 38320  
 Contact: TRACY KEE  
 tracy.kee@coviacorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: