

# **PROBLEM SUMMARY**

# Sample Rating Trend

ISO




# TM 6 Machine Id NORTH EXHAUSTER

Compressor

**REFRIG COMP OIL ISO 32 (--- GAL)** 

# COMPONENT CONDITION SUMMARY

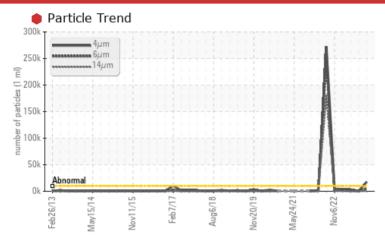

# RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		SEVERE	NORMAL	NORMAL					
Particles >4µm	ASTM D7647 >	10000 <b>17453</b>	454	3217					
Particles >6µm	ASTM D7647 >	2500 <b>5227</b>	188	982					
Particles >14µm	ASTM D7647 >	320 • 411	27	95					
Particles >21µm	ASTM D7647 >	<b>8</b> 0 <b>109</b>	6	30					
Oil Cleanliness	ISO 4406 (c) >2	20/18/15 <b>21/20/16</b>	16/15/12	19/17/14					

Customer Id: KIMMOBTM6 Sample No.: RP0030564 Lab Number: 06010760 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

# **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component if applicable.

# HISTORICAL DIAGNOSIS

# 09 Aug 2023 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



# 24 May 2023 Diag: Don Baldridge

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 21 Feb 2023 Diag: Don Baldridge

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

# TM 6 **NORTH EXHAUSTER**

Compressor

**REFRIG COMP OIL ISO 32 (--- GAL)** 

# Sample Rating Trend



# DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

All component wear rates are normal.

# Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		22013 May20	14 Nov2015 Feb2017	Aug2018 Nov2019 May2021 I	Vov2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0030564	RP0034422	RP0023567
Sample Date		Client Info		17 Nov 2023	09 Aug 2023	24 May 2023
Machine Age	wks	Client Info		0	0	0
Oil Age	wks	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		12	7	11
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	5	0	0	0
Calcium	ppm	ASTM D5185m	12	0	0	0
Phosphorus	ppm	ASTM D5185m	12	66	58	64
Zinc	ppm	ASTM D5185m	12	<1	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	11	11
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.1	0.008	0.001	0.004
ppm Water	ppm	ASTM D6304	>1000	88.2	0.00	41.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>17453</b>	454	3217
Particles >6µm		ASTM D7647	>2500	<b>5227</b>	188	982
Particles >14µm		ASTM D7647	>320	• 411	27	95
Particles >21µm		ASTM D7647	>80	<b>1</b> 09	6	30
Particles >38µm		ASTM D7647	>20	4	0	2
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>2</b> 1/20/16	16/15/12	19/17/14
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2
Acid Number (AN)	ma 1/011/a	ACTM DODAE	0.10	0.001	0.11	0.10

Acid Number (AN)

mg KOH/g ASTM D8045 0.10

0.11

0.091

0.12



# **OIL ANALYSIS REPORT**

