




# PROBLEM SUMMARY

Sample Rating Trend

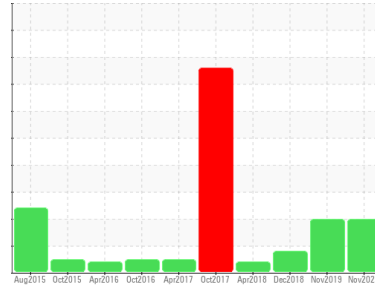

**WATER**




Machine Id  
**KAESER BSD 50 4886908 (S/N 1086)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## COMPONENT CONDITION SUMMARY

### ▲ Water (KF)

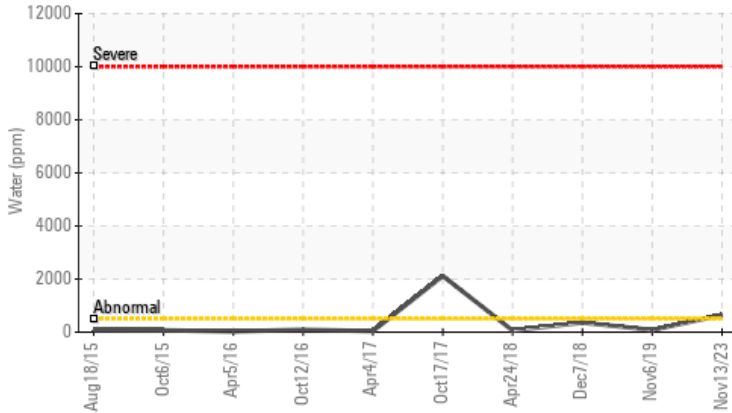

## RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	ATTENTION
Water	%	ASTM D6304	>0.05	▲ <b>0.065</b>	0.008	0.036
ppm Water	ppm	ASTM D6304	>500	▲ <b>650</b>	80.6	360
Debris	scalar	*Visual	NONE	▲ <b>HEAVY</b>	▲ MODER	LIGHT
Emulsified Water	scalar	*Visual	>0.05	▲ <b>0.2%</b>	NEG	0.2%

**Customer Id:** STABELKC  
**Sample No.:** KCPA005818  
**Lab Number:** 06010788  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

### 06 Nov 2019 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



### 07 Dec 2018 Diag: Jonathan Hester

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 24 Apr 2018 Diag: Jonathan Hester

VIS DEBRIS




No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. High concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id  
**KAESER BSD 50 4886908 (S/N 1086)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

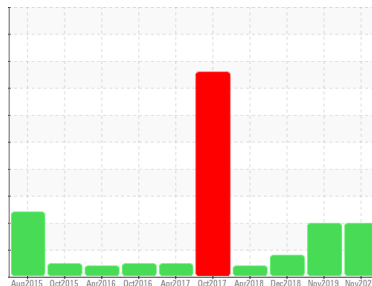

**DIAGNOSIS**

**Recommendation**

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

**Wear**

All component wear rates are normal.

**Contamination**

High concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA005818</b>	KCP23264	KCP14515
Sample Date	Client Info		<b>13 Nov 2023</b>	06 Nov 2019	07 Dec 2018
Machine Age	hrs	Client Info	<b>62372</b>	37100	31310
Oil Age	hrs	Client Info	<b>0</b>	4800	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>8</b>	11	8
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	2	<1
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m 2	<b>0</b>	0	8
Phosphorus	ppm	ASTM D5185m	<b>0</b>	0	2
Zinc	ppm	ASTM D5185m	<b>2</b>	0	8
Sulfur	ppm	ASTM D5185m	<b>16732</b>	14480	18061

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	<1	0
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Water	%	ASTM D6304 >0.05	<b>▲ 0.065</b>	0.008	0.036
ppm Water	ppm	ASTM D6304 >500	<b>▲ 650</b>	80.6	360




**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>---</b>	3269	1012
Particles >6µm	ASTM D7647 >1300		<b>---</b>	▲ 1780	551
Particles >14µm	ASTM D7647 >80		<b>---</b>	▲ 303	▲ 94
Particles >21µm	ASTM D7647 >20		<b>---</b>	▲ 102	▲ 31
Particles >38µm	ASTM D7647 >4		<b>---</b>	▲ 15	4
Particles >71µm	ASTM D7647 >3		<b>---</b>	1	0
Oil Cleanliness	ISO 4406 (c) >17/13		<b>---</b>	▲ 18/15	▲ 16/14

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.41</b>	0.421	0.418


# OIL ANALYSIS REPORT

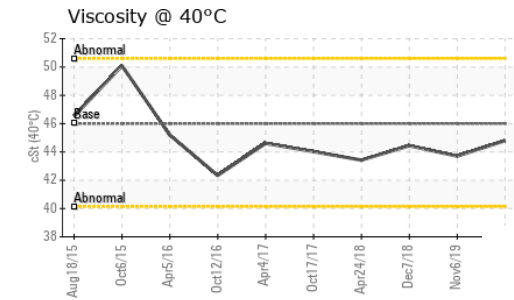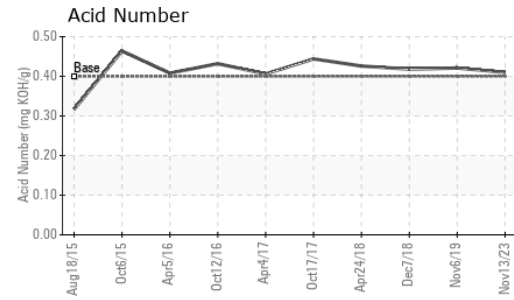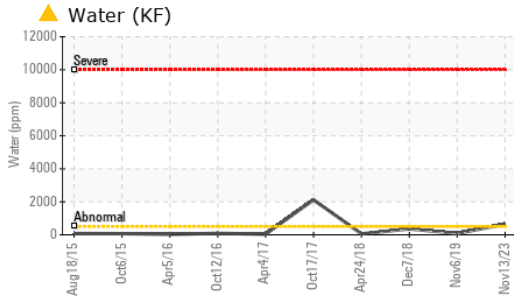





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ HEAVY	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.8	43.7	44.44

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

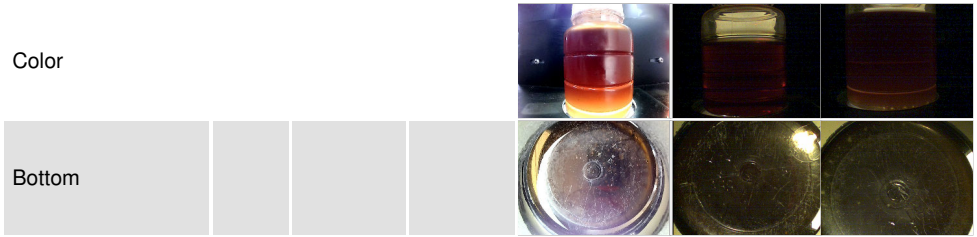

## GRAPHS

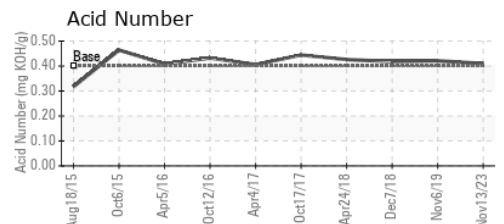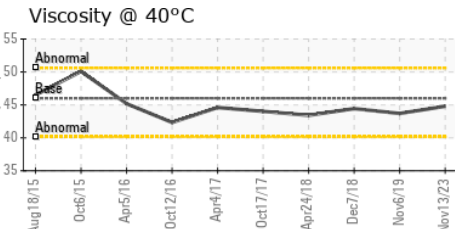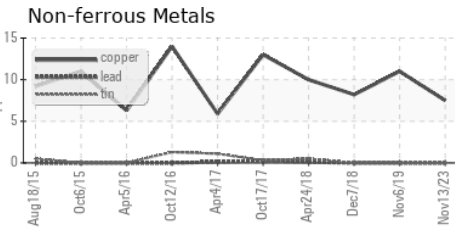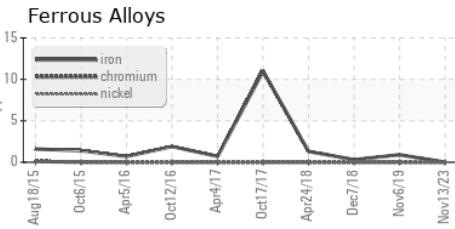

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KCPA005818  
 Lab Number : 06010788  
 Unique Number : 10749932  
 Test Package : IND 2 ( Additional Tests: KF, PrtCount )

**STATEWIDE BORING**  
 6401 HAGGERTY RD  
 BELLEVILLE, MI  
 US 48111  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: